


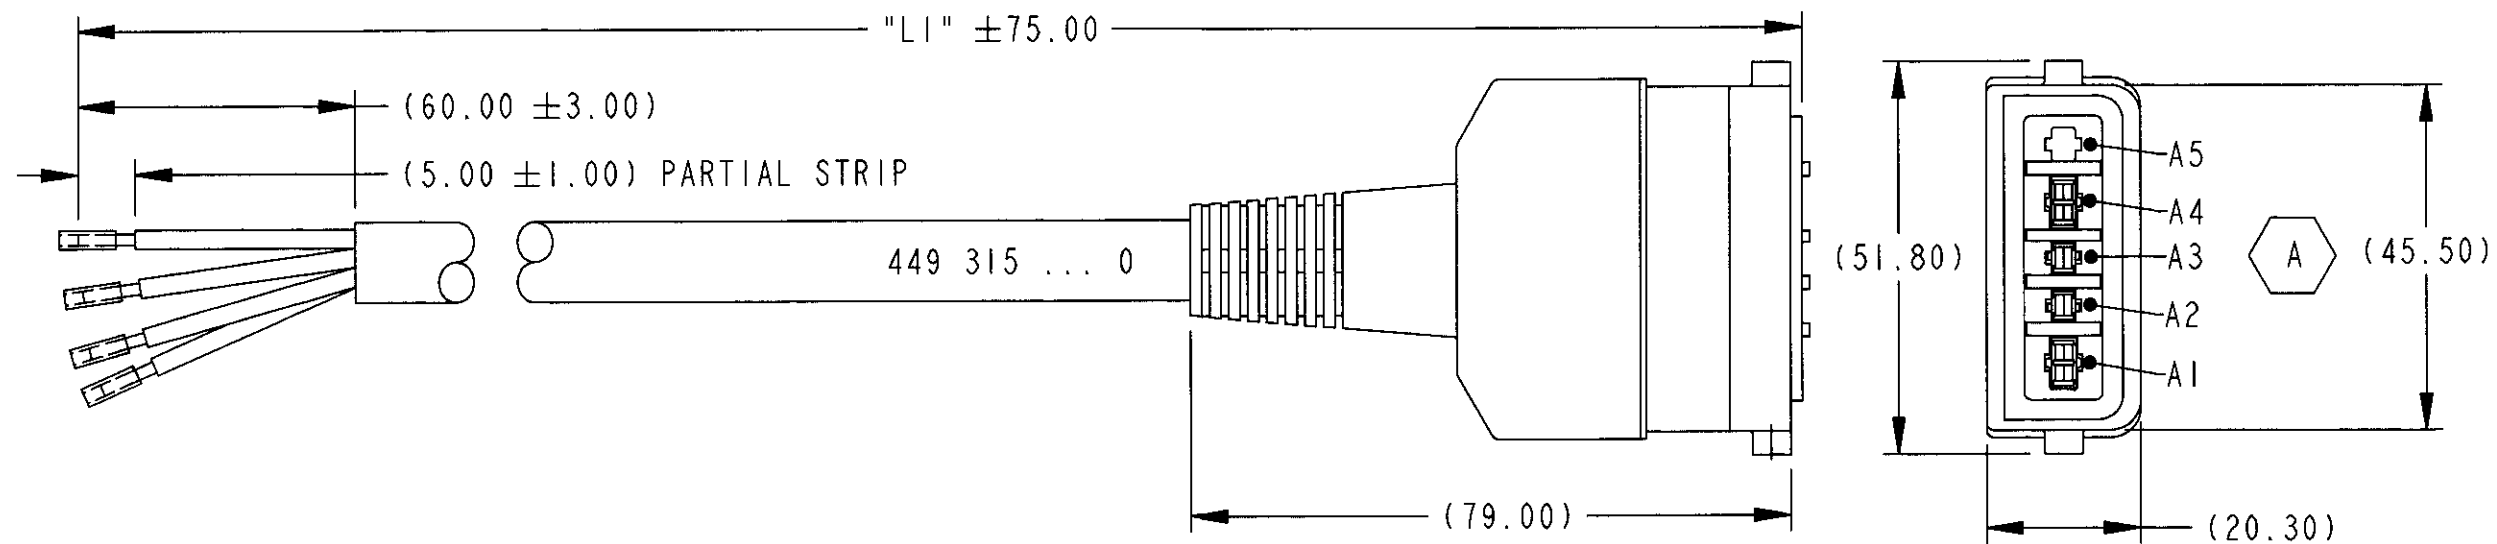

THERMAL RANGE OF APPLICATION: -40°C...+80°C

TYPE OF PROTECTION (CONNECTION WITH PLUG): DIN 40 050 BL.9
IP67, IP69K

4 CORE CABLE: PUR INSULATION JACKET

RESISTANT TO: AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY

POSITION	COLOR	CONDUCTOR SIZE	FUNCTION
A1	BLUE	12 AWG OR 2.5mm ²	CONSTANT POWER
A2	WHITE/GREEN	16 AWG OR 1.5mm ²	TRAILER WARNING LAMP
A3	RED	14 AWG OR 2.5mm ²	STOPLIGHT POWER
A4	WHITE	12 AWG OR 2.5mm ²	GROUND
A5	-	-	(NOT USED)

20000	449 315 200 0
15000	449 315 150 0
11000	449 315 110 0
6000	449 315 060 0
4700	449 315 047 0
4000	449 315 040 0
3000	449 315 030 0
1000	449 315 010 0
500	449 315 005 0
"L1" LENGTH MM	PART NUMBER

GENERAL SPECIFICATION: JED-334		SOLID MODEL DRAWING METRIC IN MM		Rockwell WABCO Vehicle Control Systems TCS POWER CABLE (4 CORE)		
FURTHER TECHNICAL DATA:		DATE: 11/25/97				SIGNATURE: CORCORAN
DOC. CODE: SHEET: TO		CHECKED: 12/02/97				KRUSEL
GENERAL TOLERANCES		RELEASE: 12/02/97				ER8143595
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)	MASS		SCALE		
FINE	≤50	kg		1:1		
MEDIUM	>50 ≤180	T.R.I.		120		
COARSE	>180 ≤400	PRODUCT IDENTIFICATION NO.		449 315 000 0		
	>400	EDC CODE		DOC CODE		
		0687		653		
TAPPED HOLES ACC. ISO 4039 / JED-152		DCN-NO.		REV.		
ER6847074		1xA		10/27/98		
1) TOLERANCE CLASS APPLIED CROSSMARKED		DATE		REPLACEMENT FOR		
				TRAILER		
		EXPERT CODE		PRODUCT TYPE		

COPYING OF THIS DOCUMENT AND GIVING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF, WITHOUT THE EXPRESS AND EXCLUSIVE WRITTEN AUTHORIZATION OF ROCKWELL WABCO, IS PROHIBITED. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE GRANT OF PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN. THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT.