
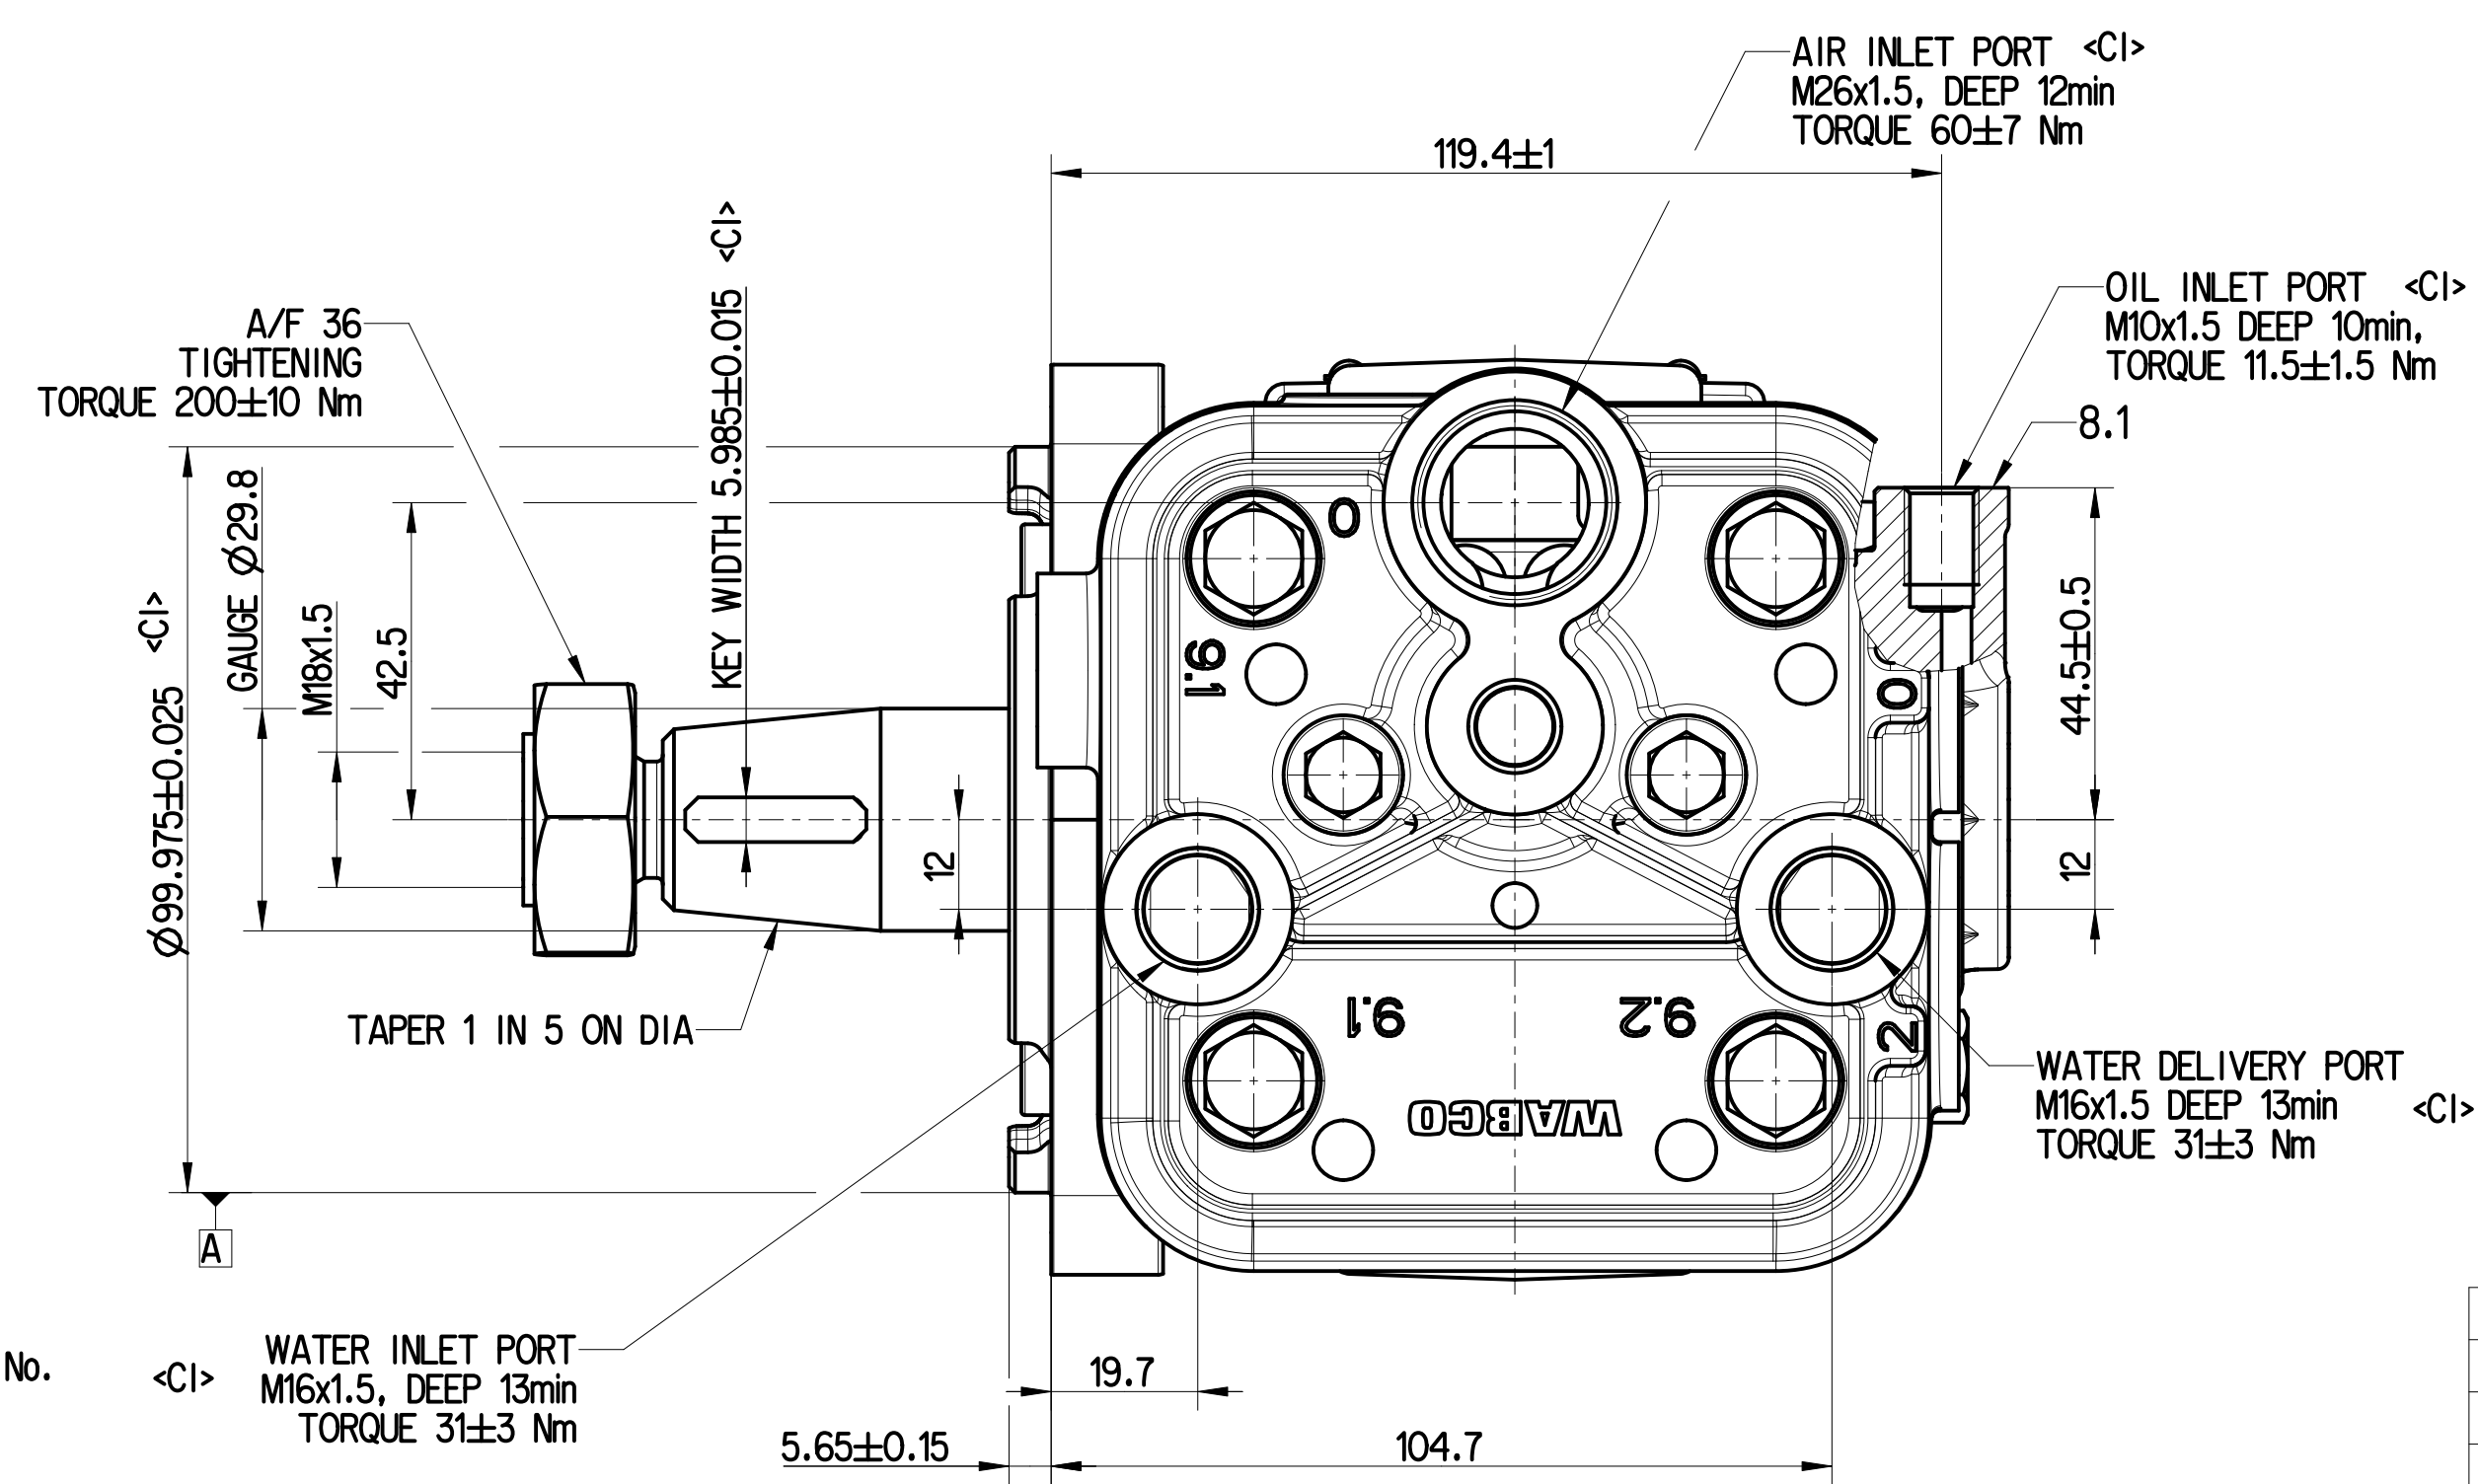
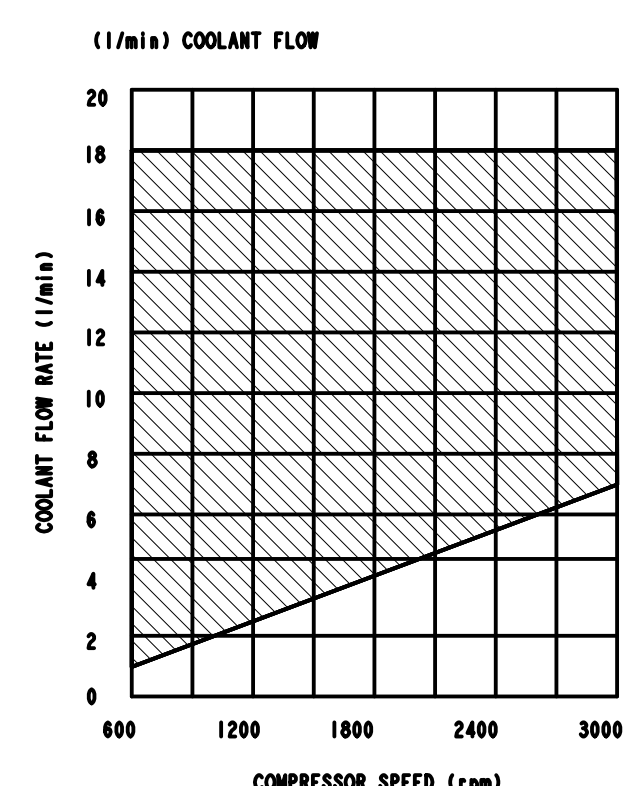


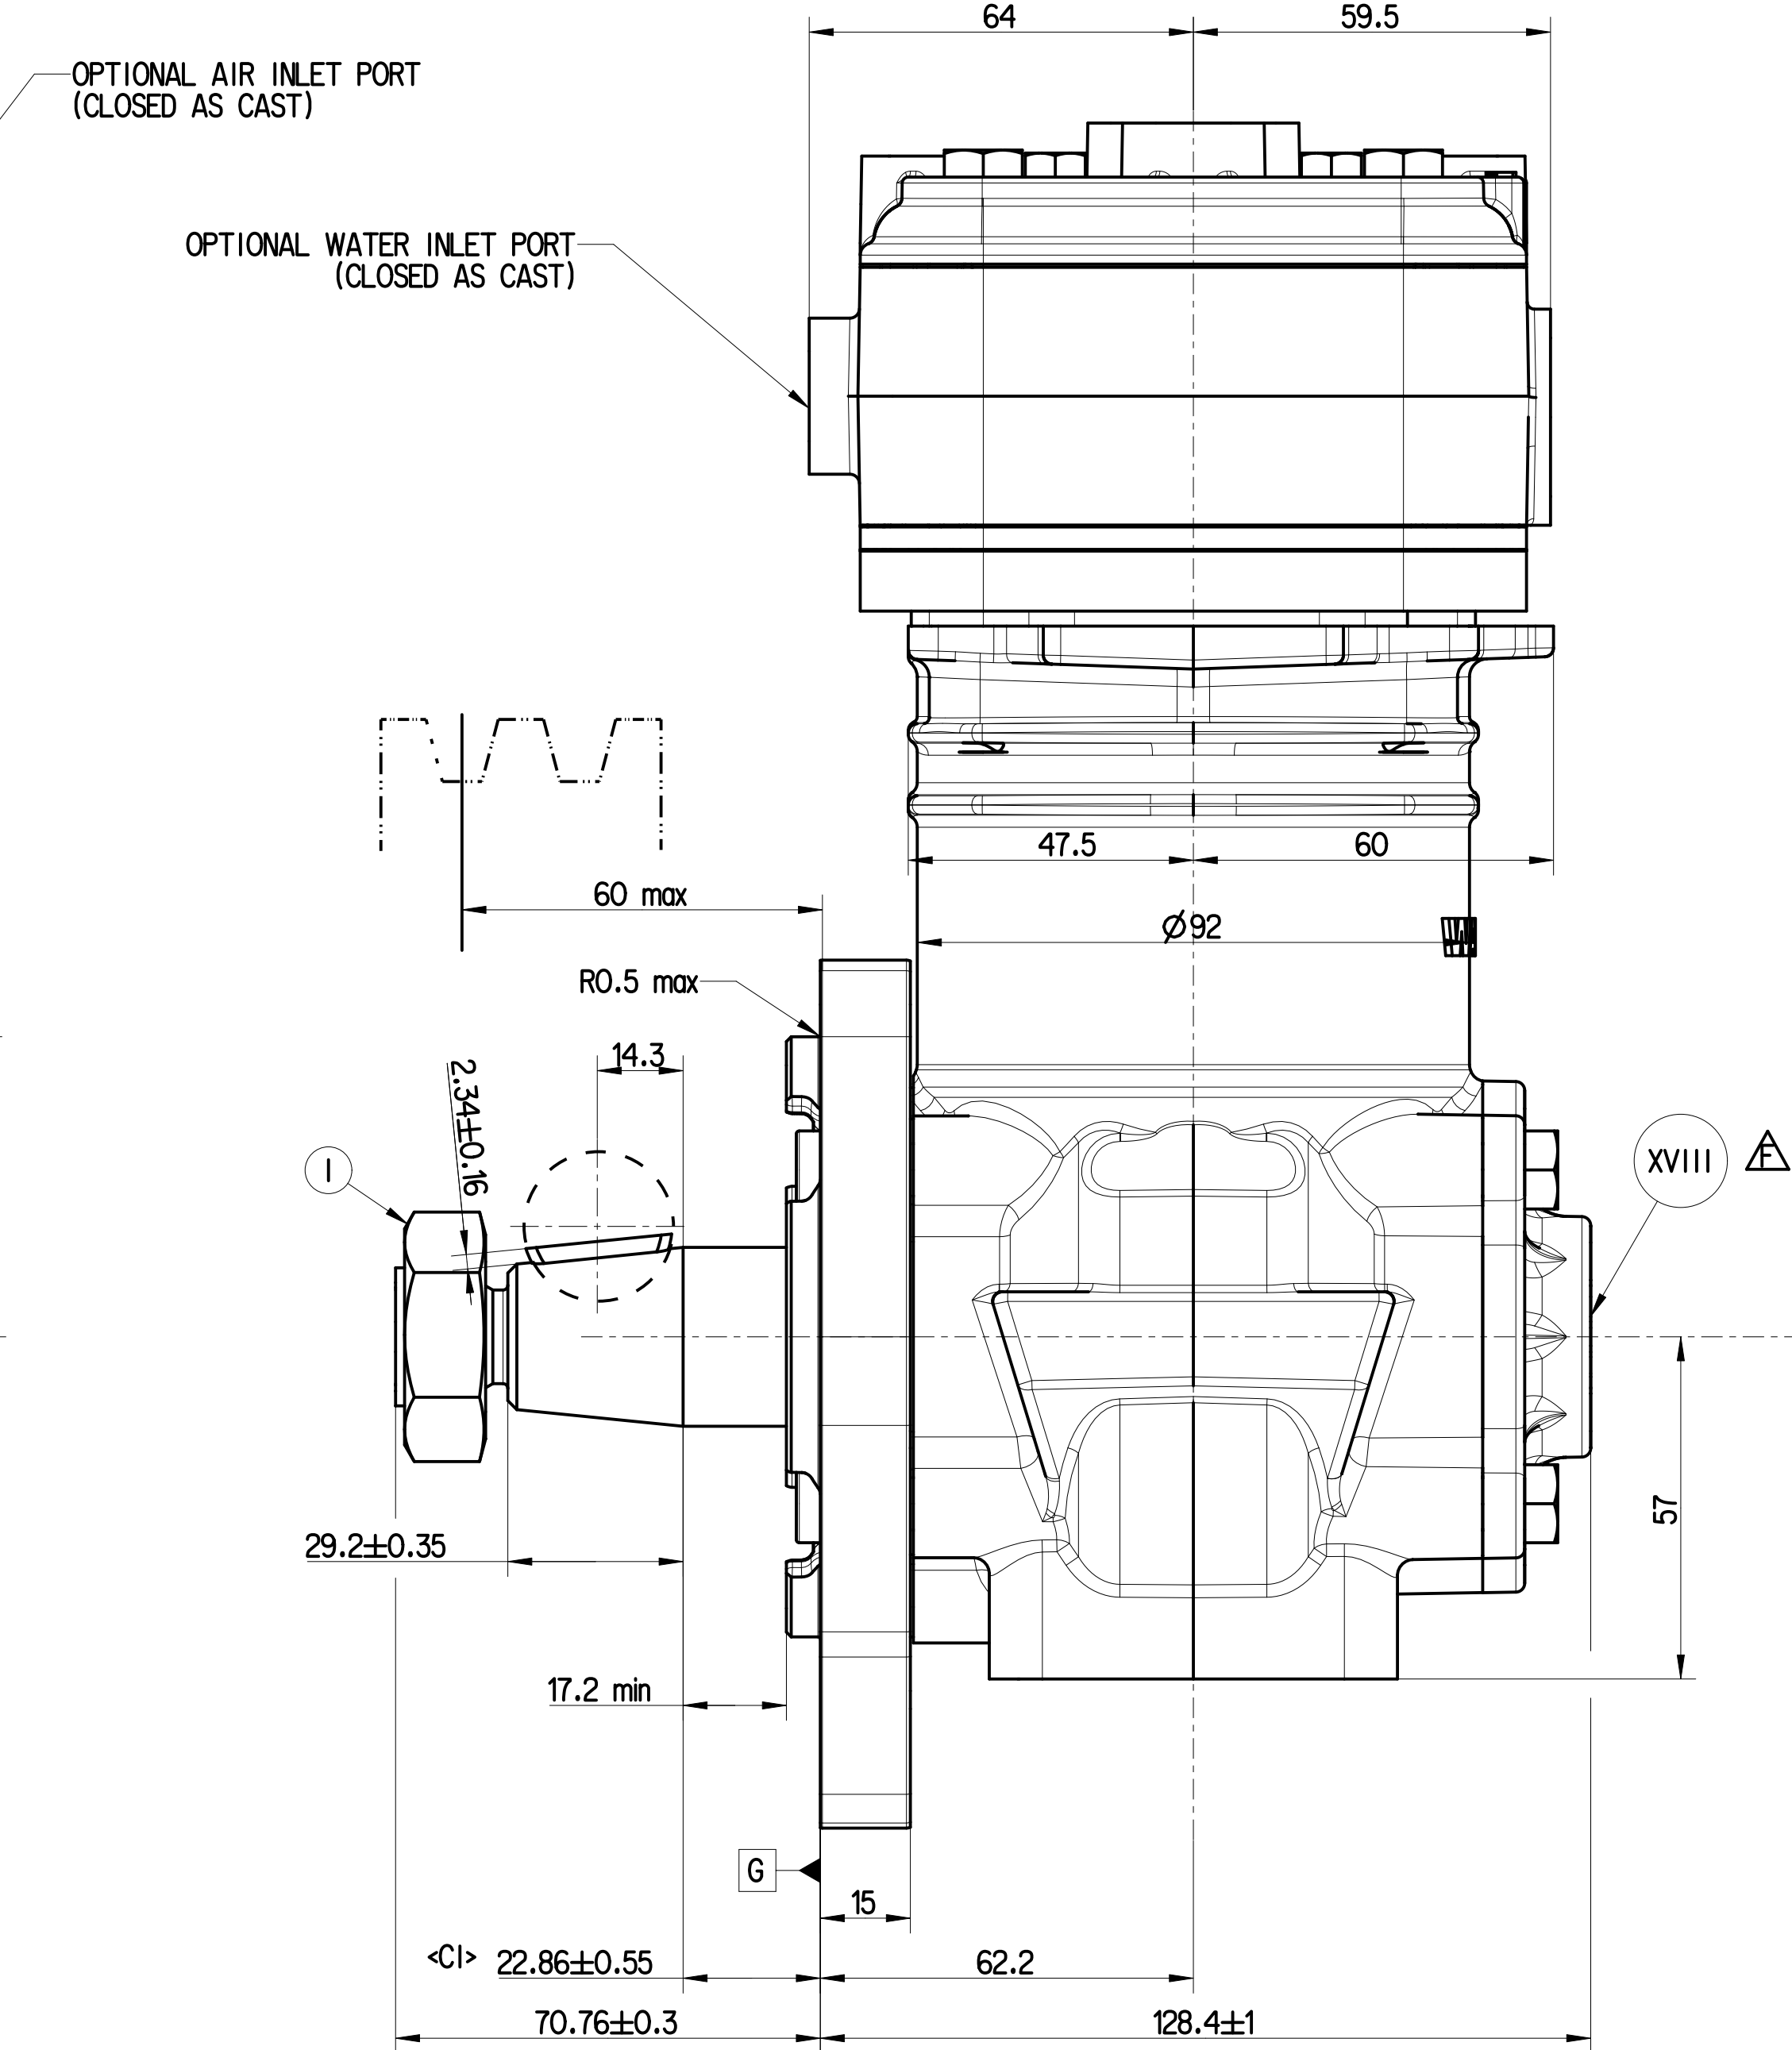

BORE DIA	80 mm
STROKE	46 mm
DISPLACEMENT	230 cm ³
AXIAL PLAY	0.25±0.20mm
NORMAL WORKING SPEED	3000 r/min
MAXIMUM WORKING SPEED (SHORT DURATION)	3900 r/min
WORKING PRESSURE	8 bar
MAXIMUM WORKING PRESSURE	12.5 bar
PAINT COLOUR	BLACK
OPEN PORTS ARE FITTED WITH CLOSURE PLUGS FOR STORAGE AND TRANSIT PURPOSES.	
EXPOSED MACHINED CAST IRON / STEEL SURFACES ARE PROTECTED WITH RUST PREVENTION OIL	

1 QR CODE / 2D MATRIX IS MARKED AS PER STD "D-MED-002"

General Specifications: ISO 8015, iED-334-1, Size ISO 14405 LP					Copyright ZP®						
Further Technical Data: PSSC 166 C					Date	Signature					
Doc. Code: Q35					Drawn						
Sheet: 1 To 6					2025-02-25	GOPAL					
General Tolerances iED-261					2025-02-25	Dricked					
Range of nominal dimensions in mm					2025-02-25	Sureshkumar	SINGLE CYLINDER COMPRESSOR (SC 230)				
Class 1) ≤ 50 > 50 > 180 ± 0.5 ± 1 ± 1.5 ± 1 ± 2 ± 3 ± 2 ± 3.5 ± 5 ± 6.5					$\pm 3^\circ$						
Fine Medium Coarse											
Tapped Holes acc. iED-152					Mass Scale 7.584 kg 1:1 Size CAD System A 1 CREO		Material No. M101200		Date of first issue: 2016-07-25 Doc. Code Language 005 EN 1/1		
1) Tolerance Class: Applied Crossmarked							ECN No. Revision 53498 S F		Tech. Resp. 5000		
							Replacement for		-		