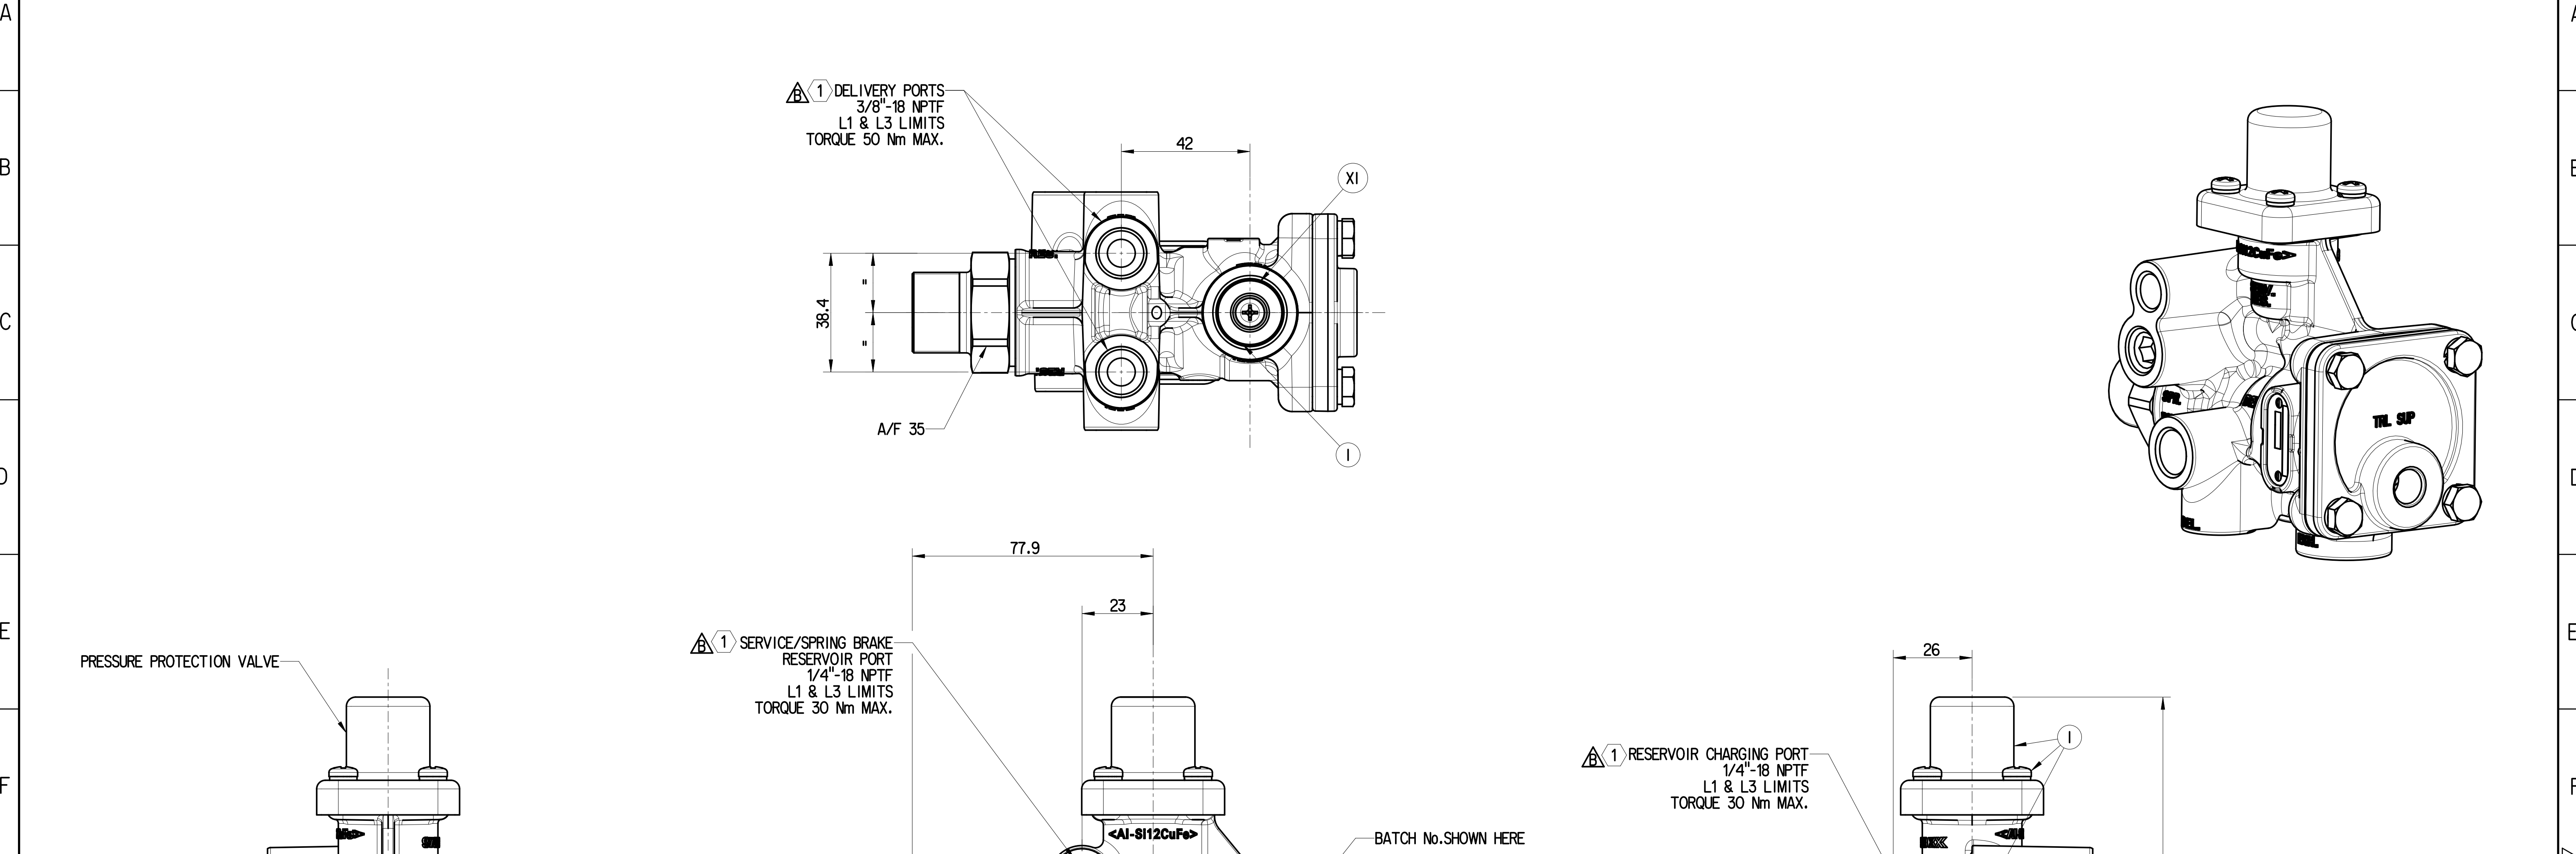


TECHNICAL DATA:

WORKING MEDIUM : AIR

THERMAL RANGE OF APPLICATION : -40°C...+80°C

MAX WORKING PRESSURE : 9.4bar

INSTALLATION POSITION : OPTIONAL

PRODUCT SPECIFICATION NO. : PSSC330C
REV.NO: 2
DATE : 12.06.2012

NOTE:

1) DOT-APPROVED TEFLON TAPE OR PASTE-TYPE THREAD SEALANT OR FITTINGS WITH PRE-APPLIED THREAD SEALANT TO BE USED WHILE TIGHTENING.

OPEN PORTS ARE TO BE FITTED WITH CLOSURE PLUGS AND MALE THREADS ARE FITTED WITH CLOSURE SLEEVE FOR STORAGE AND TRANSIT PURPOSES.

General Specification: ISO 8075, JED-334-1, Size ISO 14405 LP			Copyright ZF®				SBV3 SPRING BRAKE CONTROL VALVE			
Further Technical Data:			Date	Drawn						
Doc. Code			Sheet	To	2024-09-19		Jegadeesan			
General Tolerances JED-261			Range of nominal dimensions in mm		2024-09-20		Pannuramuraj			
Class	1)	≤ 50				Dimensions in mm				
		> 50								
		≤ 180								
		≤ 400								
Fine		±0.5	±1	±1.5	±2	kg	1:1	Date of first issue		
Medium	X	±1	±2	±3	±4					
Coarse		±2	±3.5	±5	±6.5					
Tapped Holes acc.			Size		CAD System		Revision			
1) Tolerance Class Applied Crossmarked			A 1		CREO		6x B			
			ECN No.		513911		Tech. Resp.			
			5240_WIN				Replacement for			
			100mm							

XV	STEEL	ZINC IRON PLATED
XIV	CAST IRON	NO TREATMENT
XIII	ZINC ALLOY	ANODISED
XII	PLASTIC	NO TREATMENT
XI	RUBBER	NO TREATMENT
X	STAINLESS STEEL	NO TREATMENT
IX	BRASS	NO TREATMENT
VIII	ZINC ALLOY	CHROMATED
VII	ALUMINIUM ALLOY	ANODISED
VI	ALUMINIUM ALLOY	CHROMATED
V	CAST IRON	PAINTED
IV	STEEL	POWDER COATED
III	STEEL	PAINTED
II	STEEL	PHOSPHATED
I	STEEL	ZINC PLATED
PART CODE	MATERIAL	SURFACE PROTECTION

22. DELIVERY

3. EXHAUST

CIRCUIT DIAGRAM

DO NOT SCALE IF IN DOUBT ASK

NOTE:

1

DOT-APPROVED TEFLON TAPE OR PASTE-TYPE THREAD SEALANT OR FITTINGS WITH PRE-APPLIED THREAD SEALANT TO BE USED WHILE TIGHTENING.

OPEN PORTS ARE TO BE FITTED WITH CLOSURE PLUGS AND MALE THREADS ARE FITTED WITH CLOSURE SLEEVE FOR STORAGE AND TRANSIT PURPOSES.