


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. E' vietata espressamente la ristampa, la traduzione, la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de copie, de ristampa, de traduction, de reproduction ou d'usage non autorise sont reserves. Toute utilisation non autorise sans la permission écrite de la WABCO est formellement interdite. Alle Rechte hier und dort der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

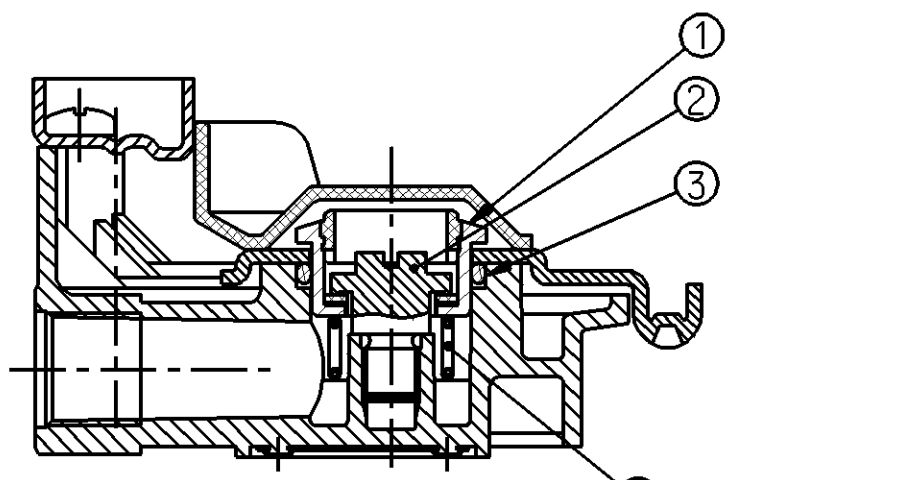


ITEM NO.	TNL PART NO.	WABCO PART NO.	DESCRIPTION	QTY
1		M801260	VALVE	1
2		M805161	PLUNGER	1
3		8979801114	SEALING RING	1
4		8960701384	COMPRESSION SPRING	1

MSP 8/53 REPAIR KIT CONSISTS OF ITEMS SHOWN AND M 919710 GREASE SACHET 1 OFF


SL.No	NOTES	
1.	PRODUCT FUNCTION AND RELIABILITY	
1.1	PRODUCT SPECIFICATION No. (ISSUE. No.: A DATE: 10.02.14)	PS 9522000010
1.2	WORKING MEDIUM	AIR
1.3	NORMAL WORKING PRESSURE	8 bar
1.4	MAXIMUM WORKING PRESSURE (TEMPORARILY)	10 bar
1.5	NOMINAL FLOW DIAMETER	5.6 mm
1.6	THERMAL RANGE OF OPERATION	-40° TO +80° C
1.7	CORROSION RESISTANCE	240 HOURS OF NSS.
1.8	COUPLING / DECOUPLING TORQUE WITH LINE PRESSURE OF 7 bar AND 0 bar	17 N.m/3 N.m.
1.9	PRODUCT TO MEET IS: 10792 - 1984	
1.10	TYPE APPROVED BY ARAI FOR IS:10792 - 1984	
1.11	ARAI REPORT REF. : SHL/466/09/94/234/1608, DATED 5.9.94	
1.12	DESIGN COMPLIES WITH ISO: 1728-1980	
2.	WEIGHT	0.25 kg
3.	QUALITY COMPLIANCE TESTS WILL BE CARRIED OUT REGULARLY AS PER CLAUSE NO. 15 OF PS 9522000010	
4.	OPEN PORT IS FITTED WITH CLOSURE PLUG FOR STORAGE AND TRANSIT PURPOSES.	

XVII	STEEL	NO TREATMENT
XVI	CAST IRON	PLATED
XV	STEEL	ZINC-IRON PLATED
XIV	CAST IRON	NO TREATMENT
XIII	ZINC ALLOY	ANODISED
XII	PLASTIC	NO TREATMENT
XI	RUBBER	NO TREATMENT
X	STAINLESS STEEL	NO TREATMENT
IX	BRASS	NO TREATMENT
VIII	ZINC ALLOY	CHROMATED
VII	ALUMINIUM ALLOY	ANODISED
VI	ALUMINIUM ALLOY	CHROMATED
V	CAST IRON	PAINTED
IV	STEEL	POWDER COATED
III	STEEL	PAINTED
II	STEEL	PHOSPHATED
I	STEEL	ZINC PLATED
PART CODE	MATERIAL	SURFACE PROTECTION


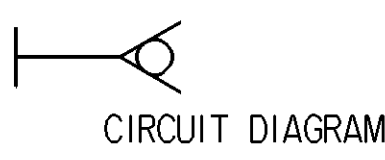


CIRCUIT DIAGRAM


ASSY. PART No. AND BATCH No. ARE SHOWN HERE

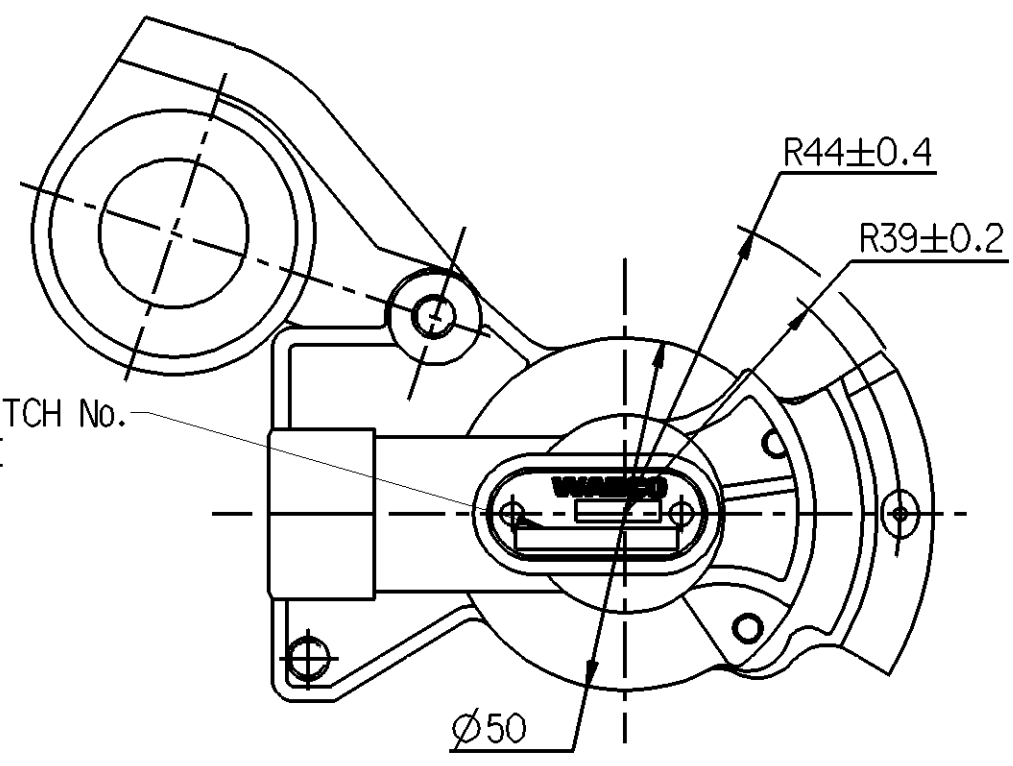


BOTTOM VIEW SHOWN WITH SHUTTER OPENED POSITION.

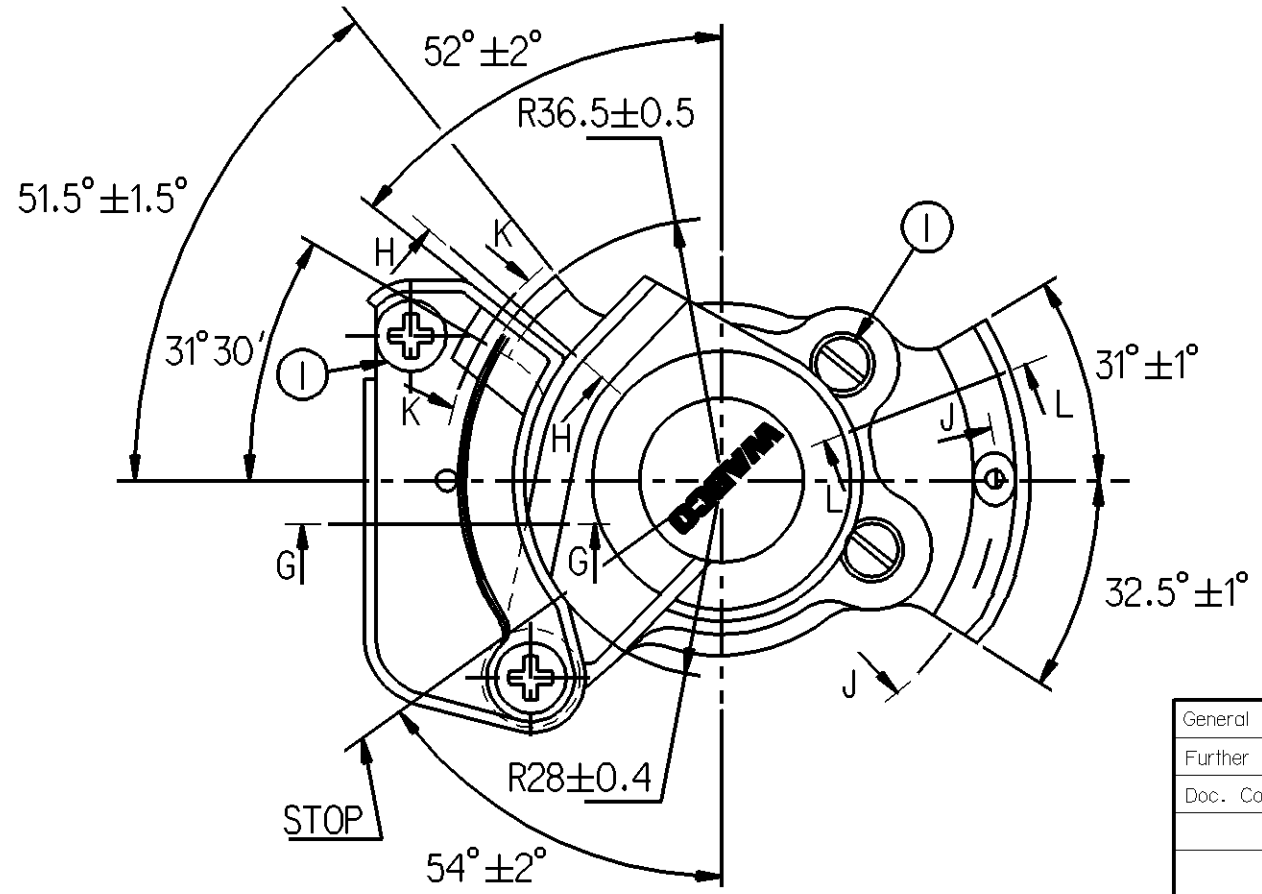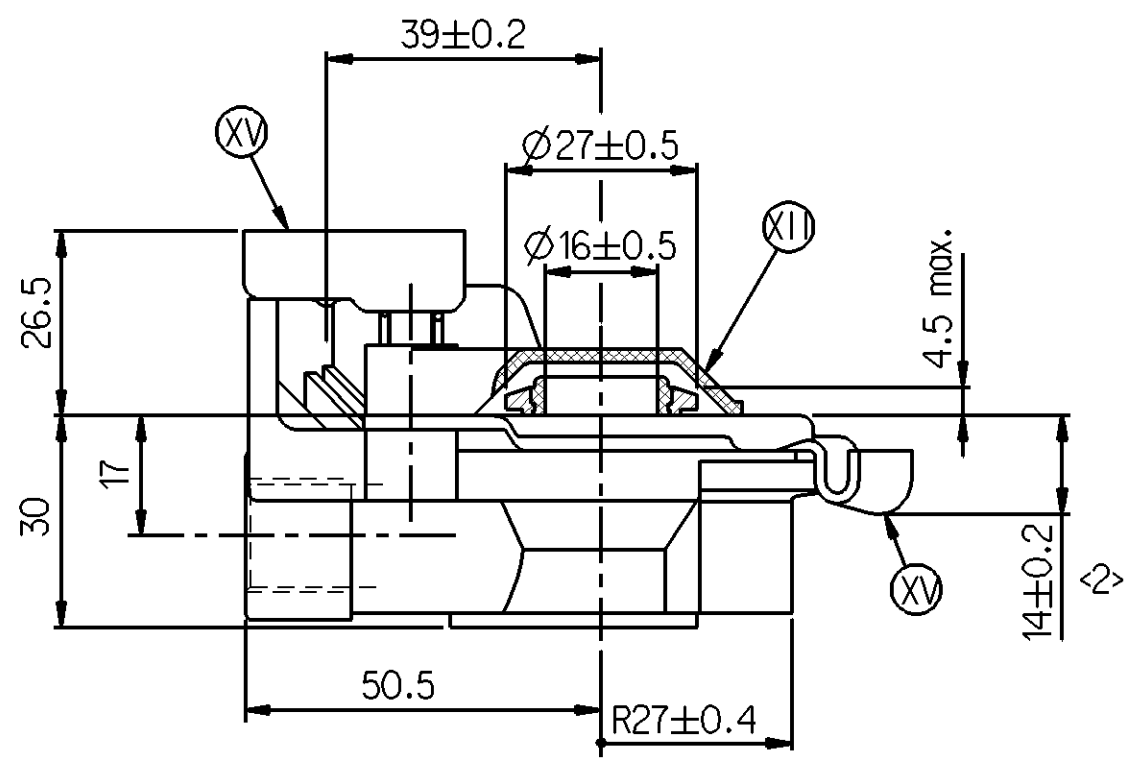

special characteristic	number
Lack of personal safety <1>	0
Major breakdown or Loss of performance <2>	2

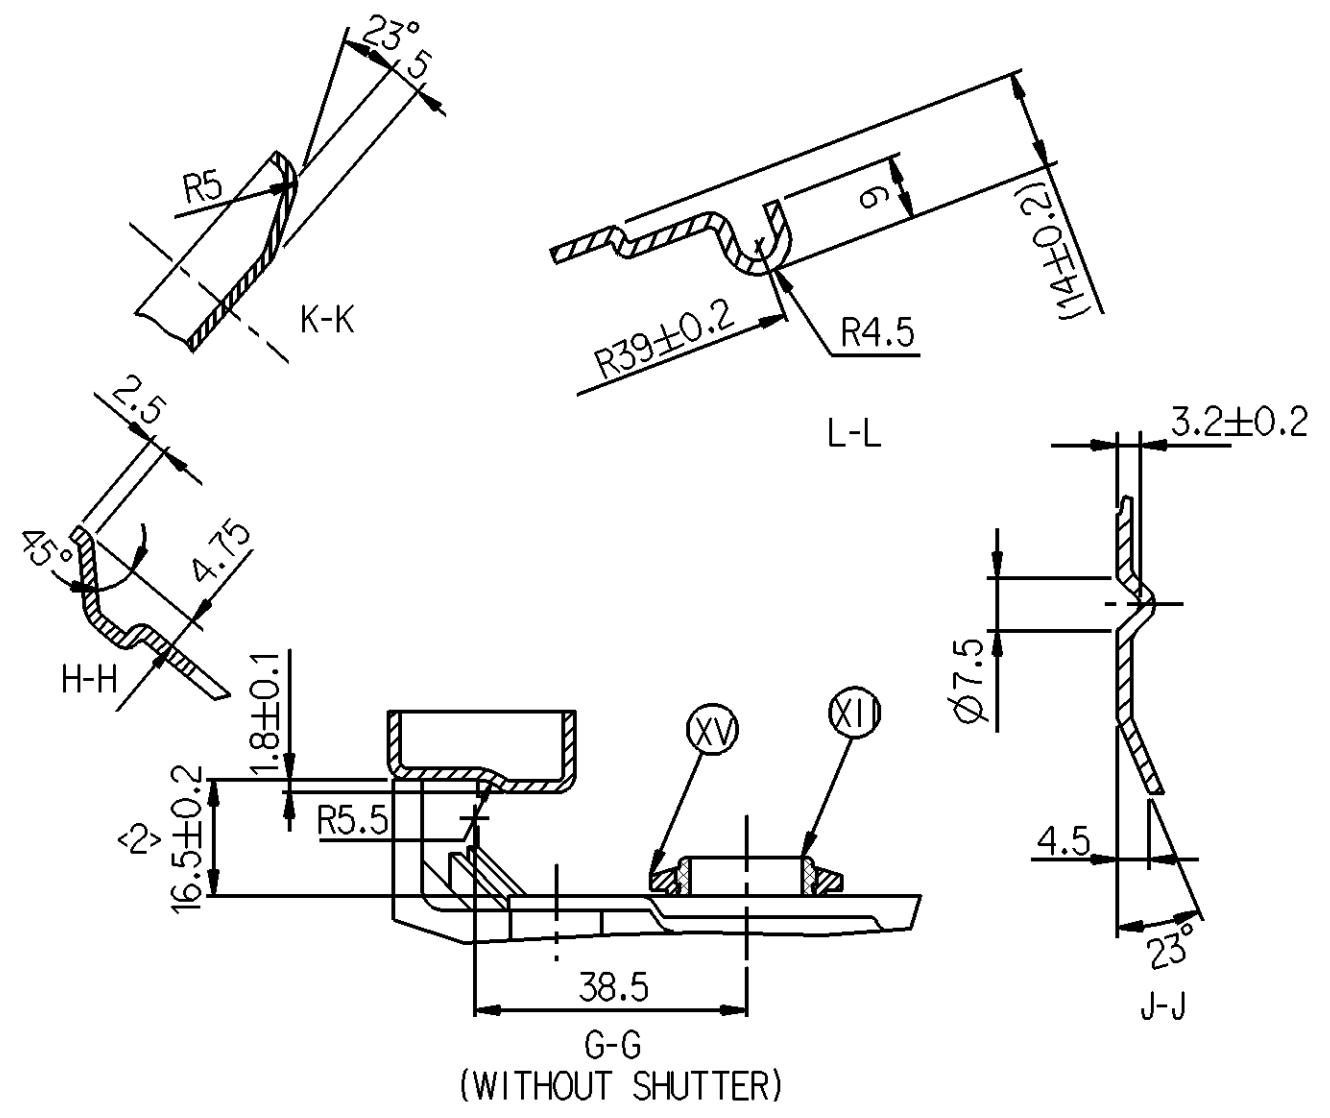

CUSTOMER LABEL PART No. SHOWN HERE. (REFER TABLE)

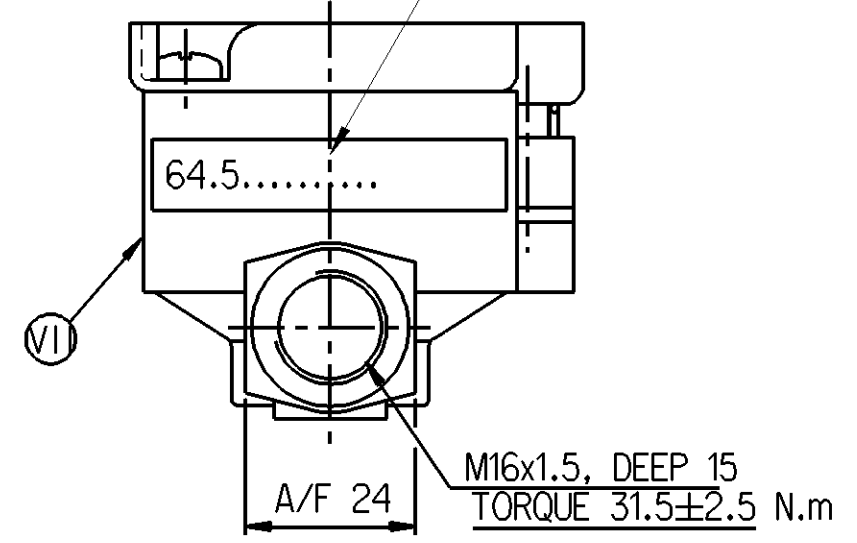

PART No.	SHUTTER COLOUR	REMARKS	TML PART No.
M800930	YELLOW	CONTROL LINE	64.52299-6002
M800940	RED	SUPPLY LINE	64.51220-6001

General Specification: JED-334-0, Size ISO 14405-1 E

Further Technical Data: 9522000010

Doc. Code: 035 Sheet: To

General Tolerances JED-261

Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400
Fine		0.5	1.0	1.5	2.0
Medium	X	1.0	2.0	3.0	4.0
Coarse		2.0	3.5	5.0	6.5

Tapped Holes acc. JED-152

1) Tolerance Class Applied Crossmarked

Copyright WABCO®

Date: 2014-06-23 Signature: Gopinath

Checked: 2014-06-24 Satheshkumar Expert

Mass	Scale	Material No.	Date of first issue:
0.250 KG	1:1	M800930	Doc. Code: 053 Language: EN Sheet: 1/1

Size	CAD System	ECN-No.	Revision	Techn. Resp.	Replacement for
A 2	Pro/E	164984	2 E	5710_WIN	-

WABCO

PALM COUPLING

100mm