
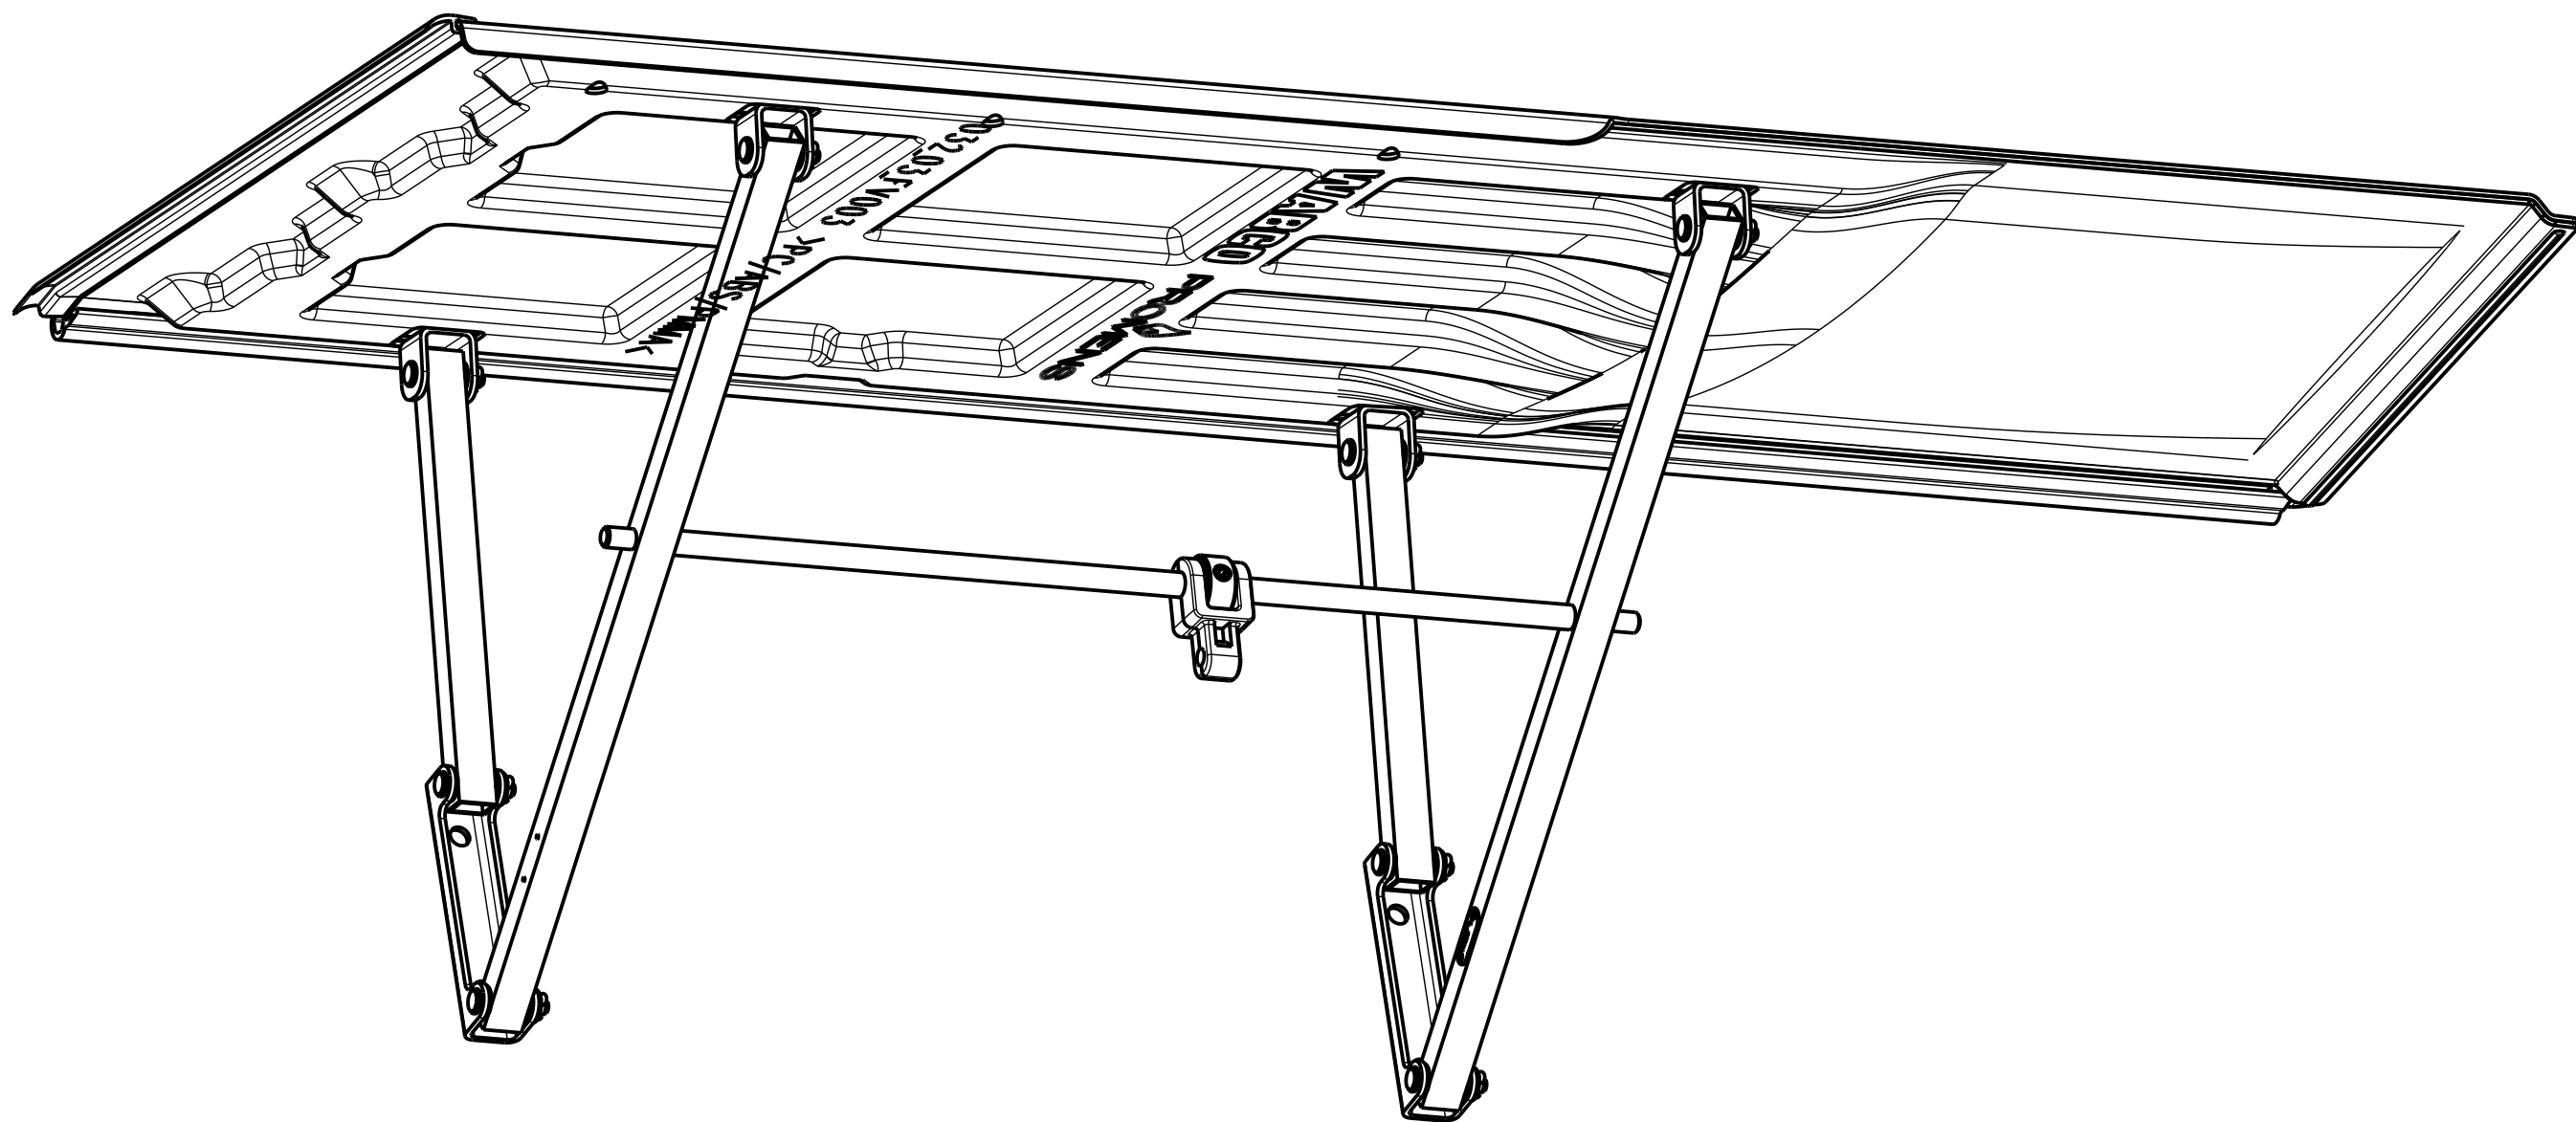
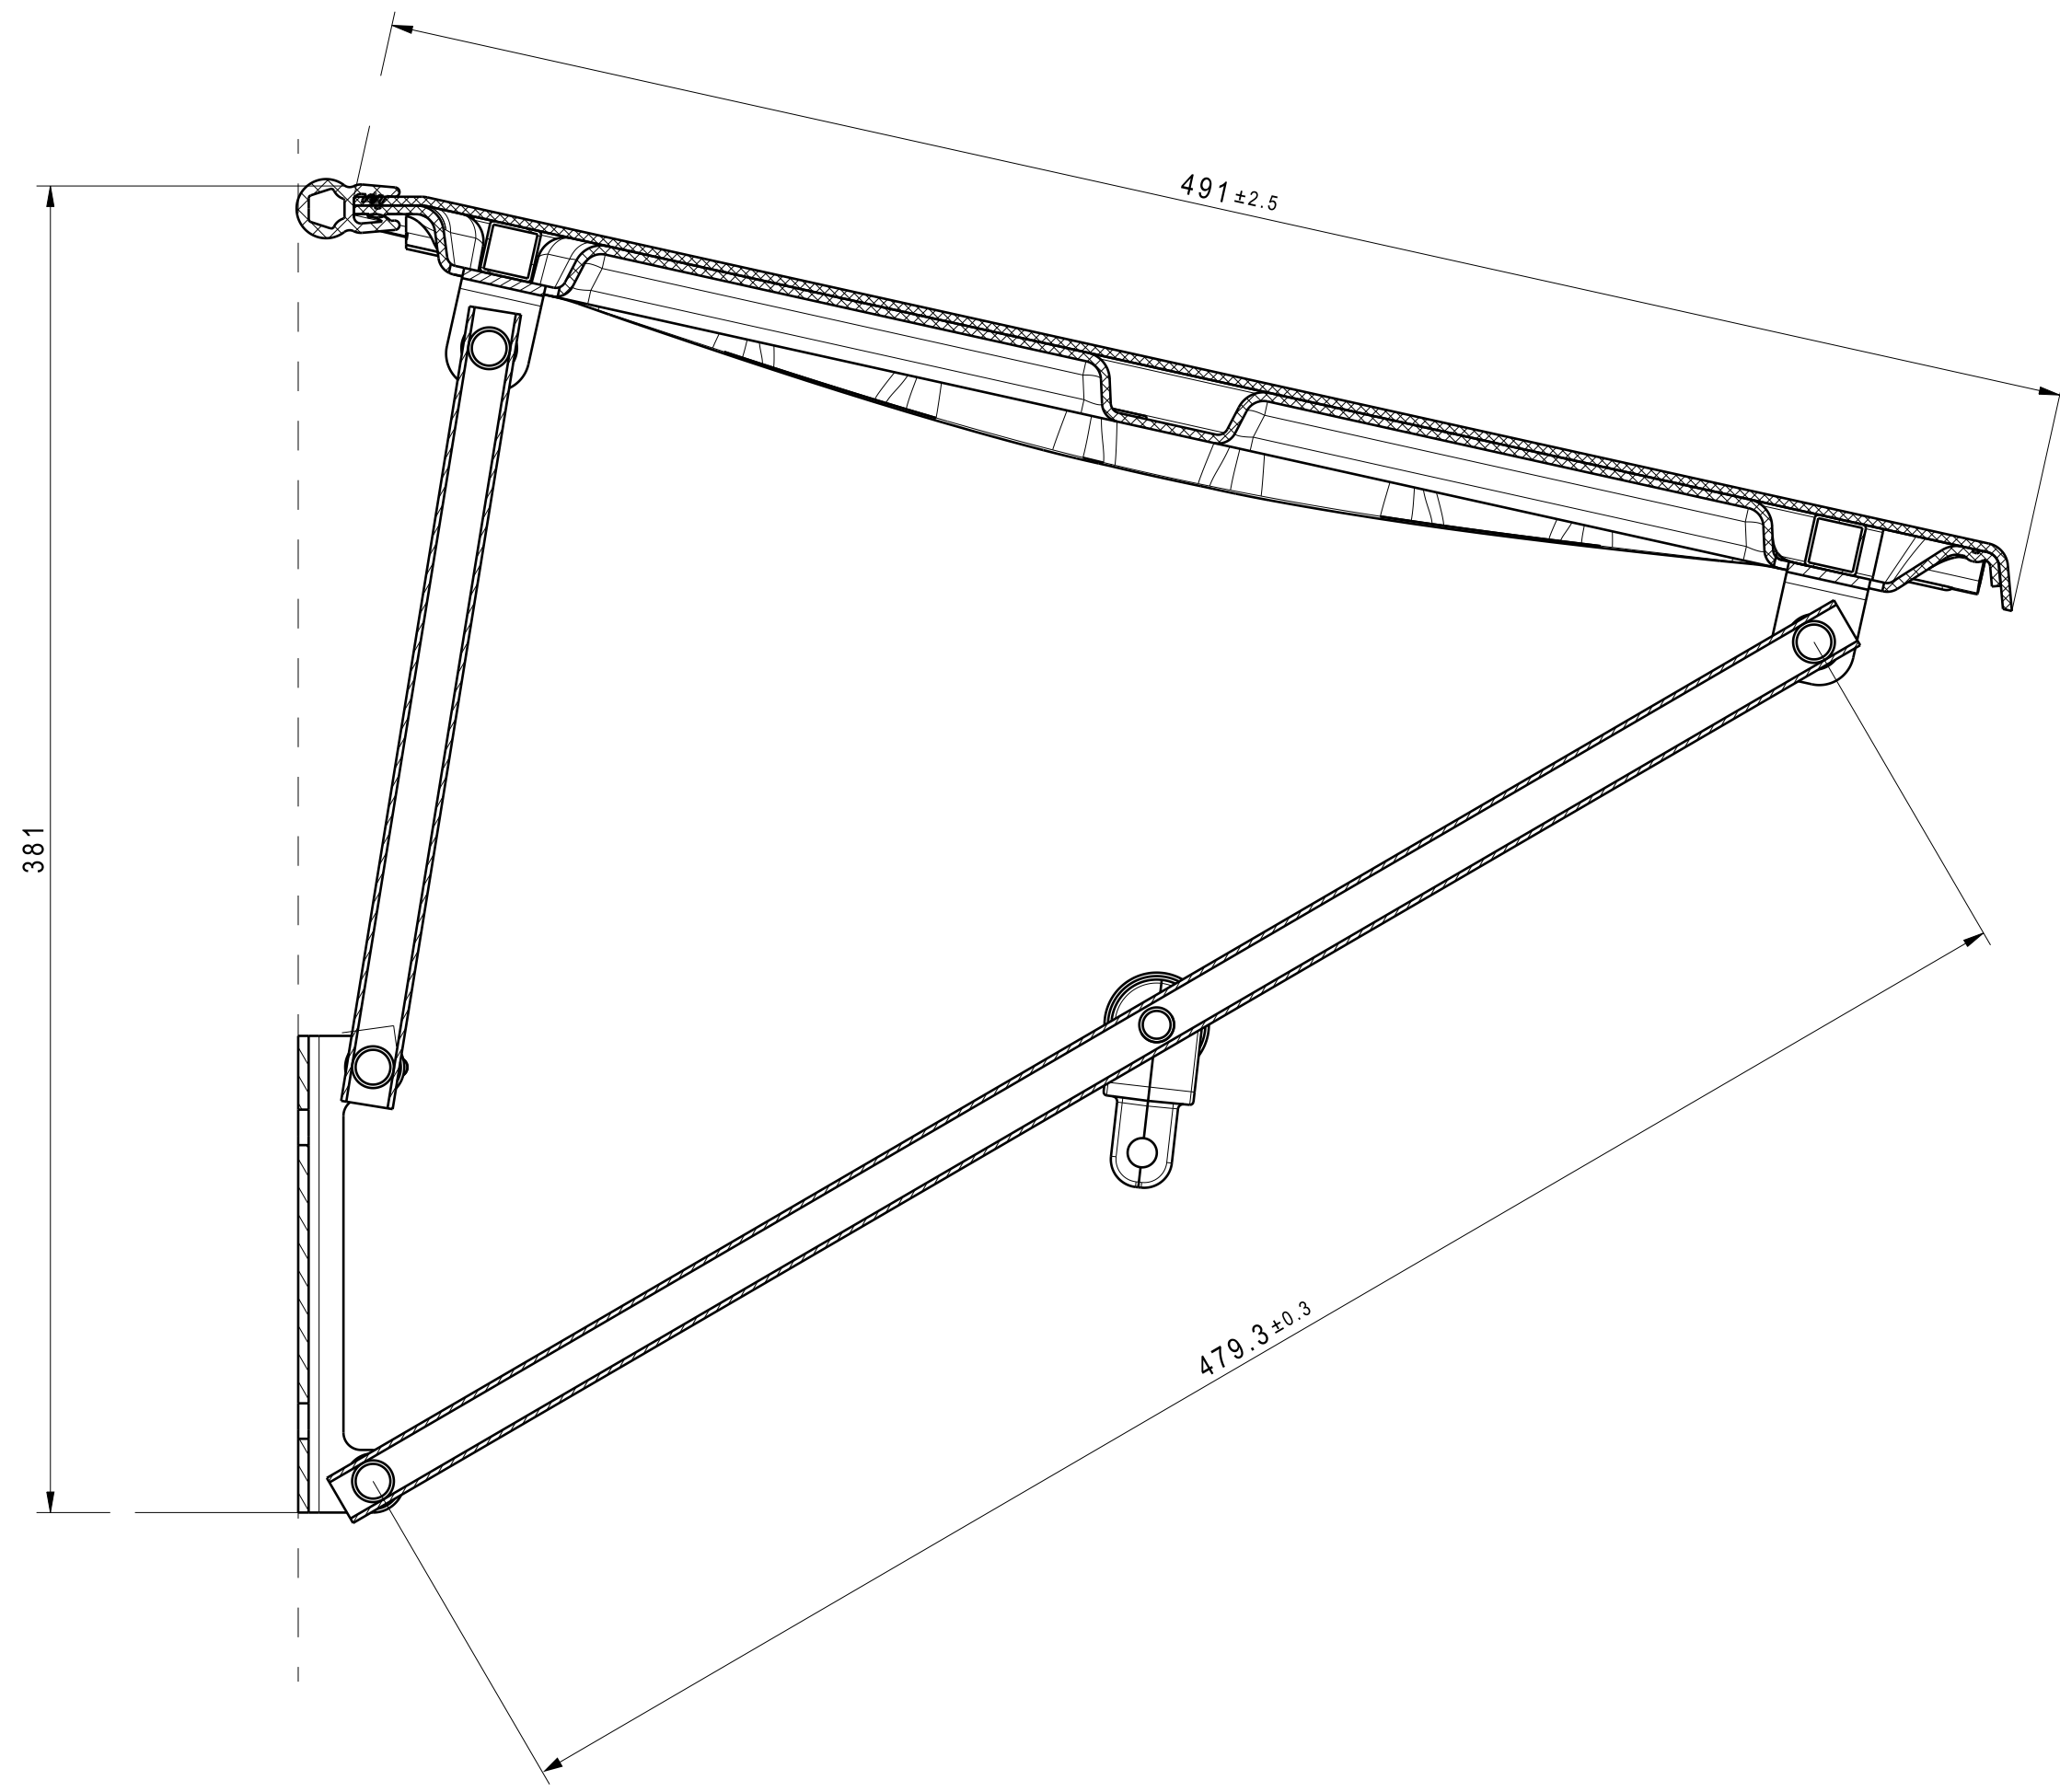


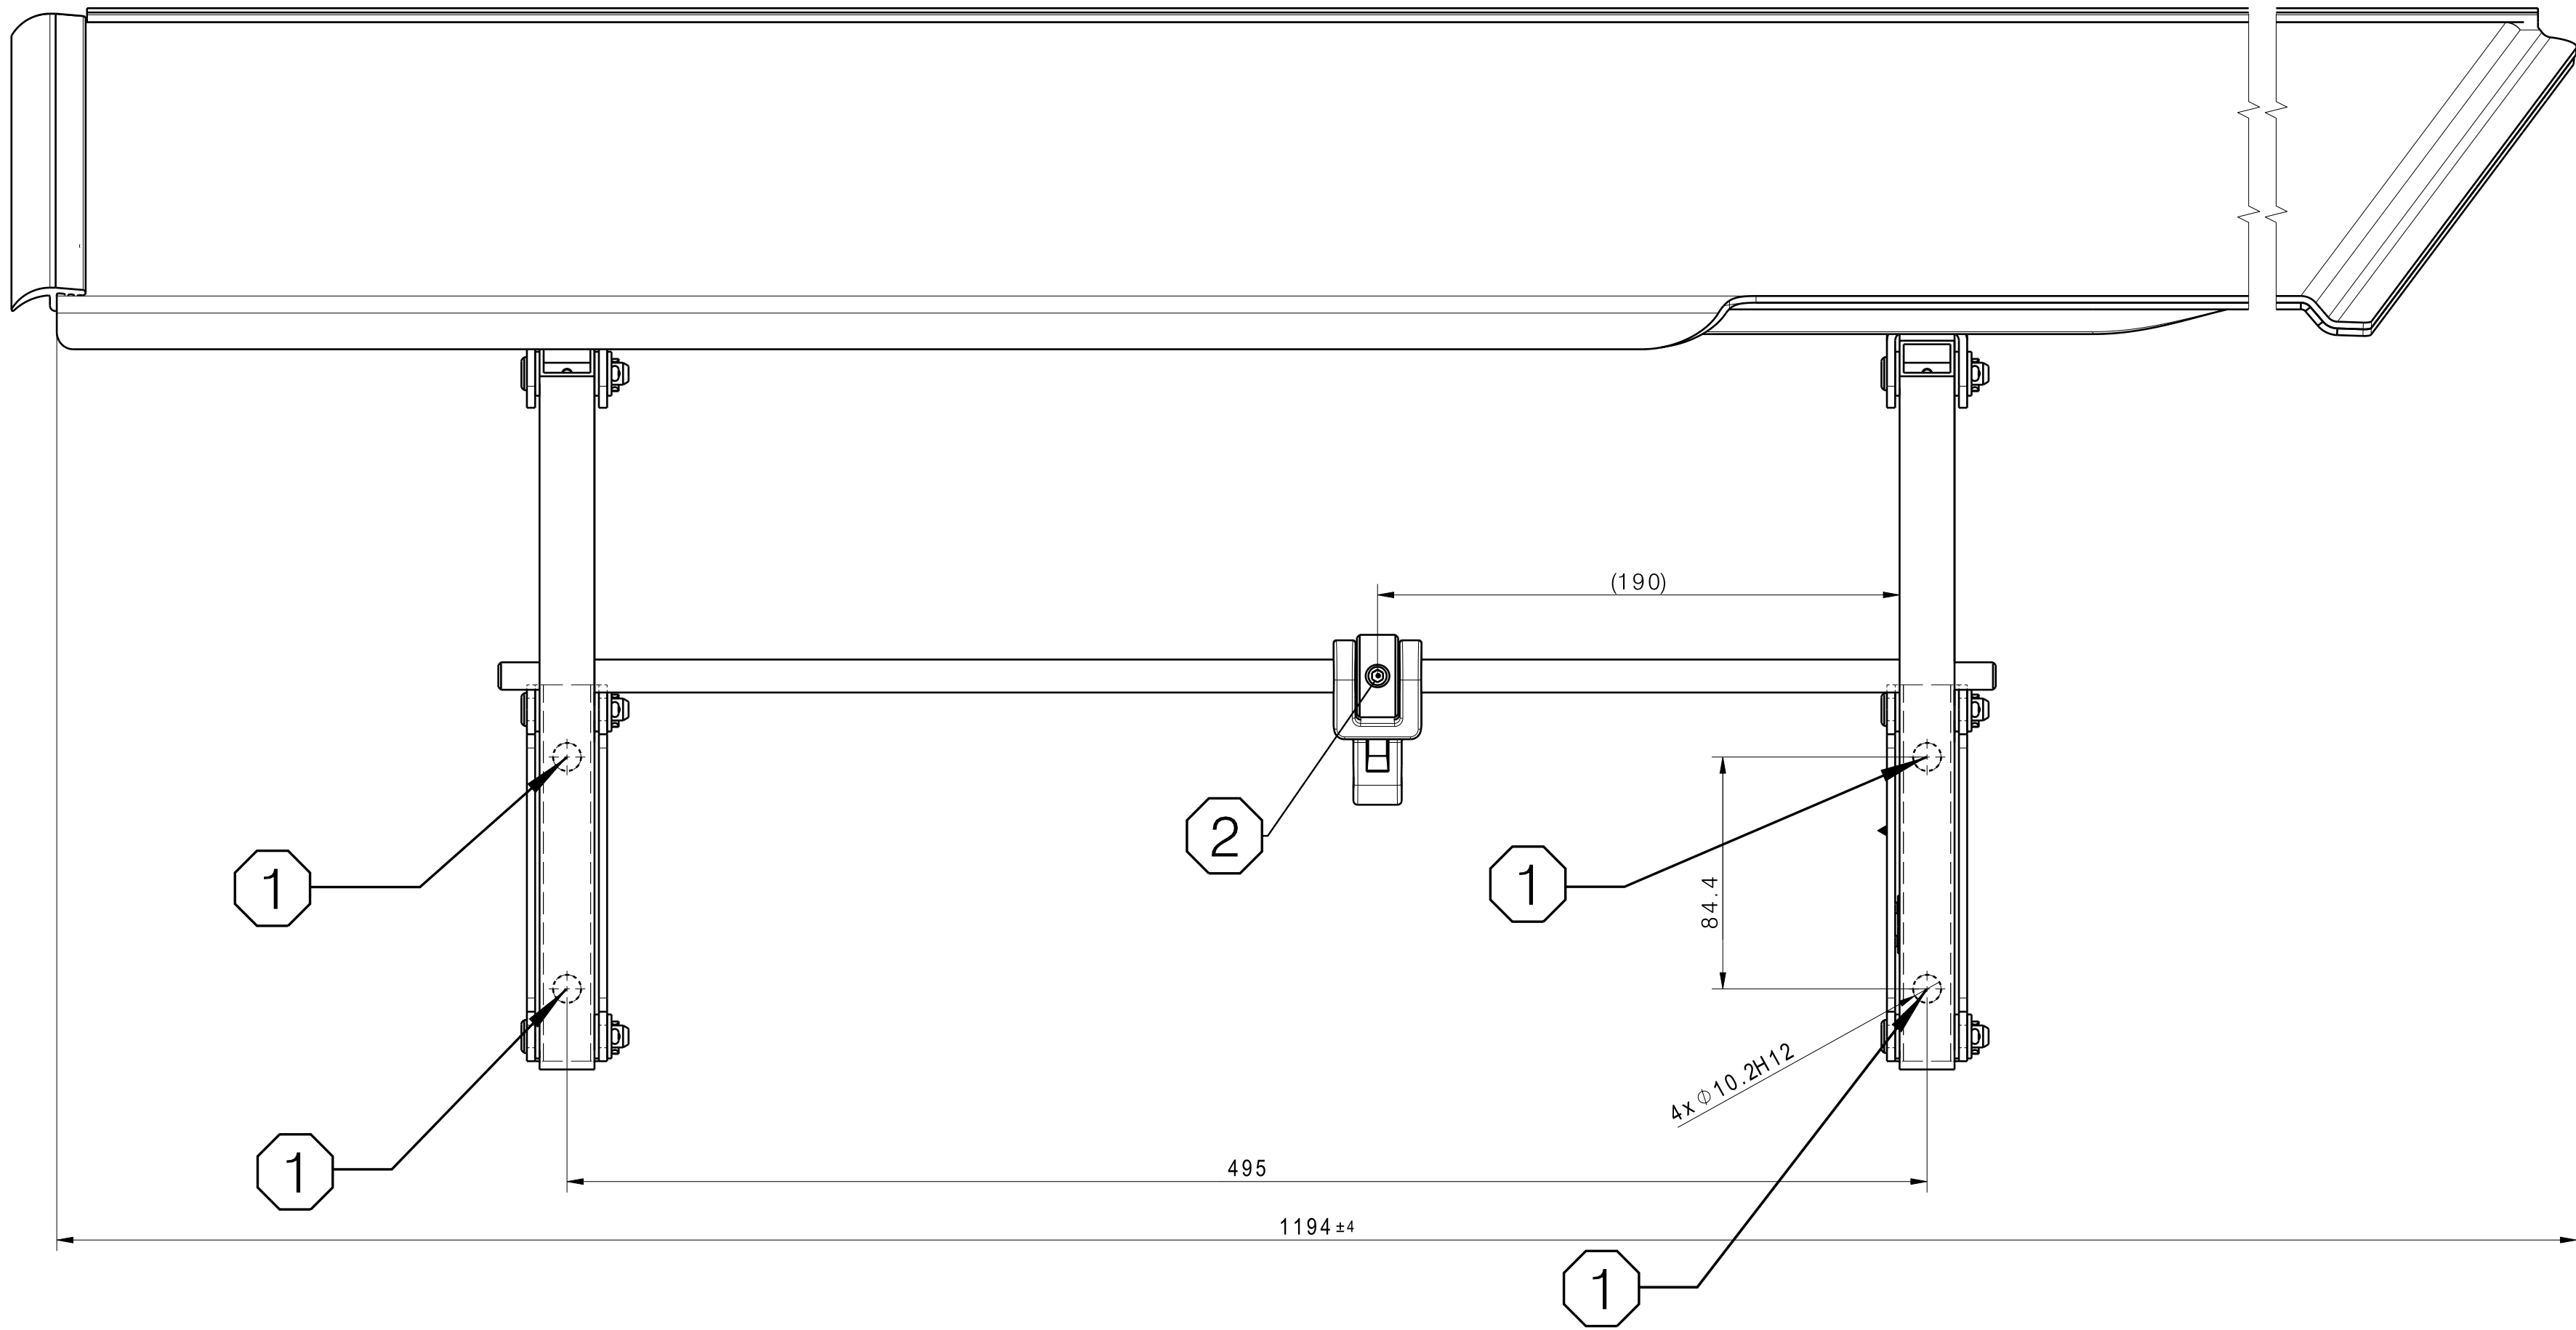

- ① = Min. required torque 25 ± 3 Nm designed for M10 thread. Fastener selection and strength prove of this connection needs to be performed by customer.
Customer is responsible to avoid damages at his trailer door. Customer should do his own screw calculation.
- ② = Secure by Loxeal 55-03 glue.

BEFORE MOUNTING,PLEASE CHECK THE OPTIFLOW™ TAIL INSTALLATION MANUAL FOR FURTHER DETAILS
CONSULT COMPLETE ASSEMBLY INSTALLATION DRAWING FOR DETAILED HOLE POSITIONING

General Specifications JED-334-1, Size ISO 14405 LP						Copyright WABCO®		WABCO	
Further Technical Data:						Date		Signature	
Doc. Codes		Sheets		To		18.11.2015		Dohnal	
General Tolerances JED-261						Checked		EU50_TP_REEFER_POS_2_R	
Range of Nominal Dimensions (mm)						06.04.2016		A. Adli	
Class 1)						Expert		Manufacturer codes	
						L. Ramirez		032_03_SV409	
Mass						Scale		Material No.	
b, ØGg						1:2		Date of first issue:	
KG						1812300070		Doc.Code Language Sheet	
Size CAD System								005 EN 1/1	
Tapped Holes acc. -						A 1		CATIA	
1) Tolerance Class Applied Crossmarked						EEN-No.		Revision	
						-		Techn. Resp.	
						6051		Replacement for	
								-	