
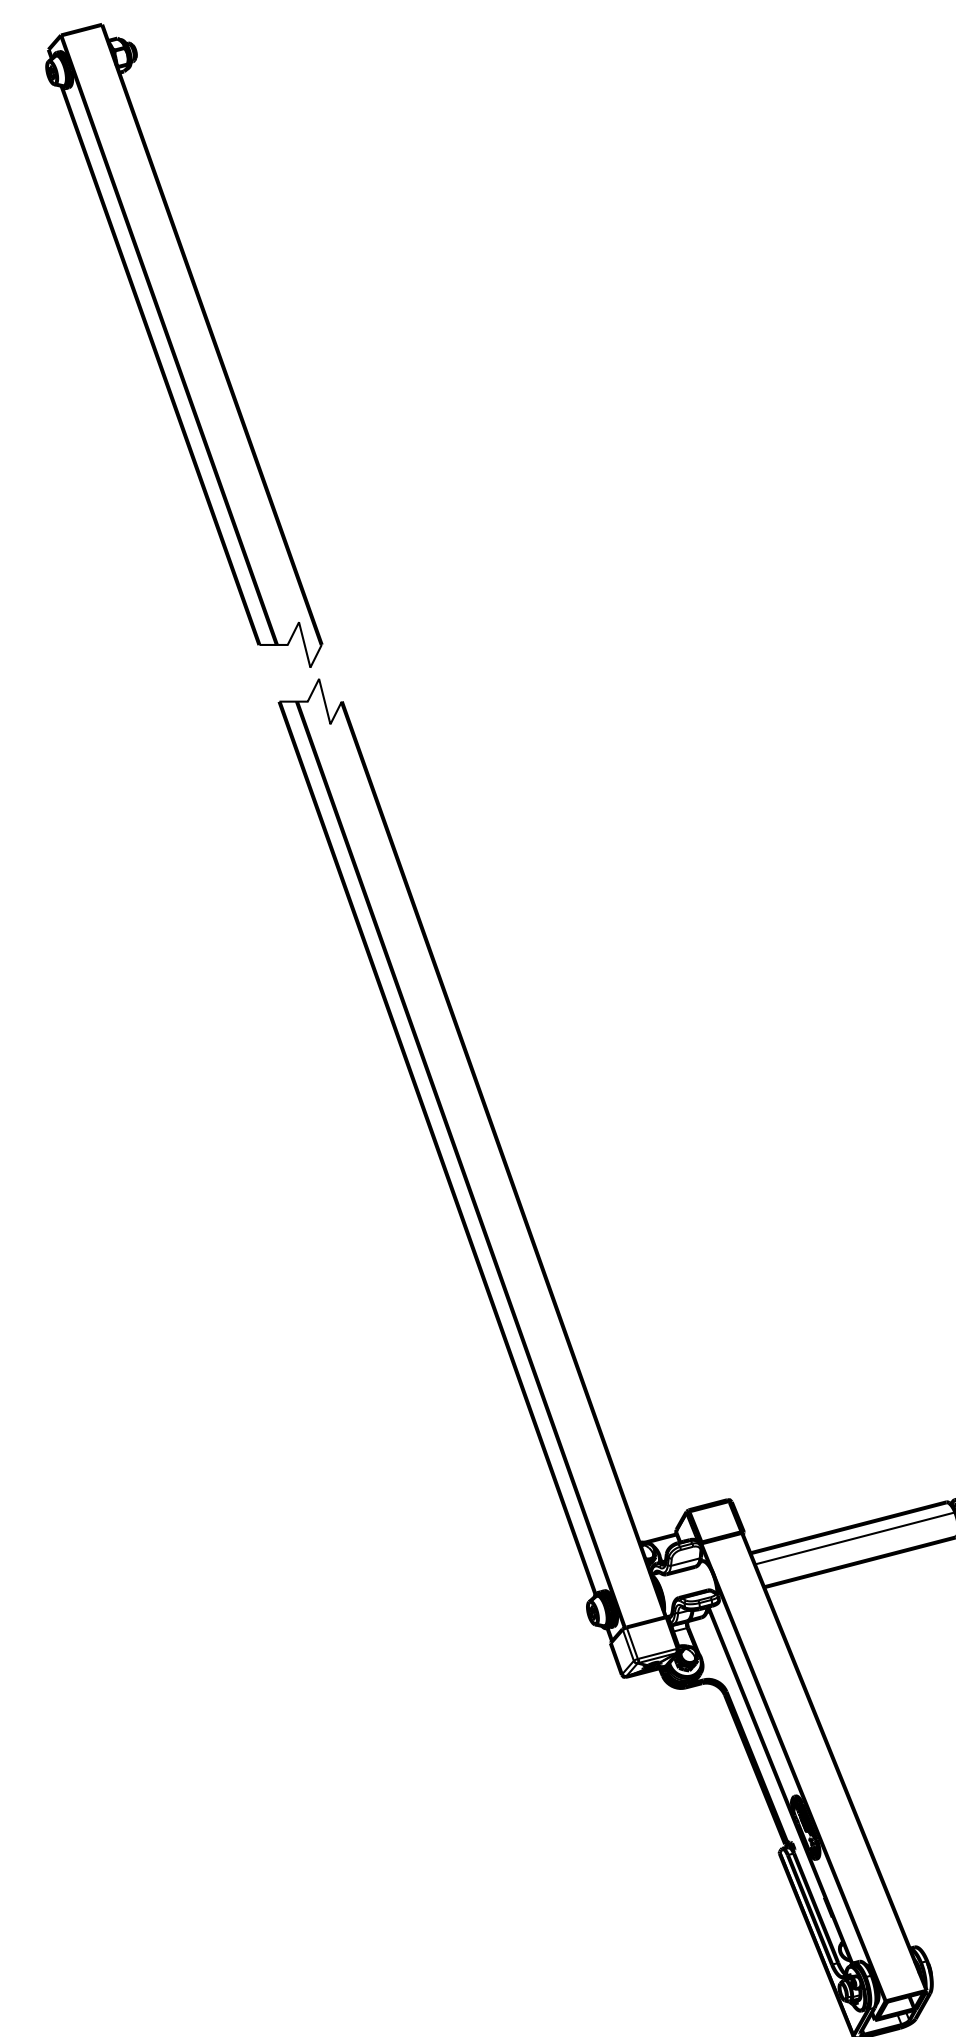
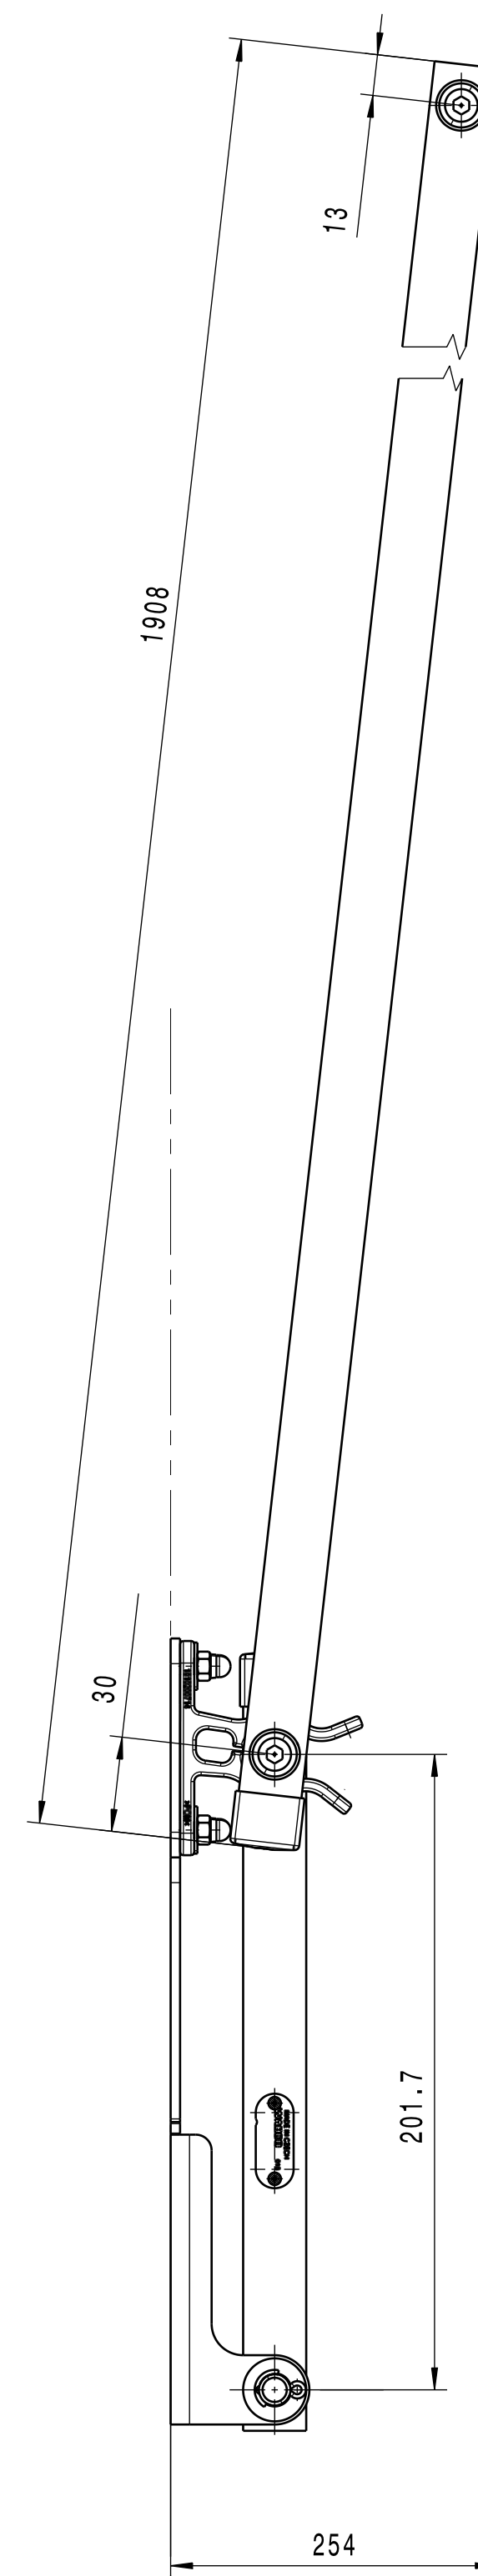


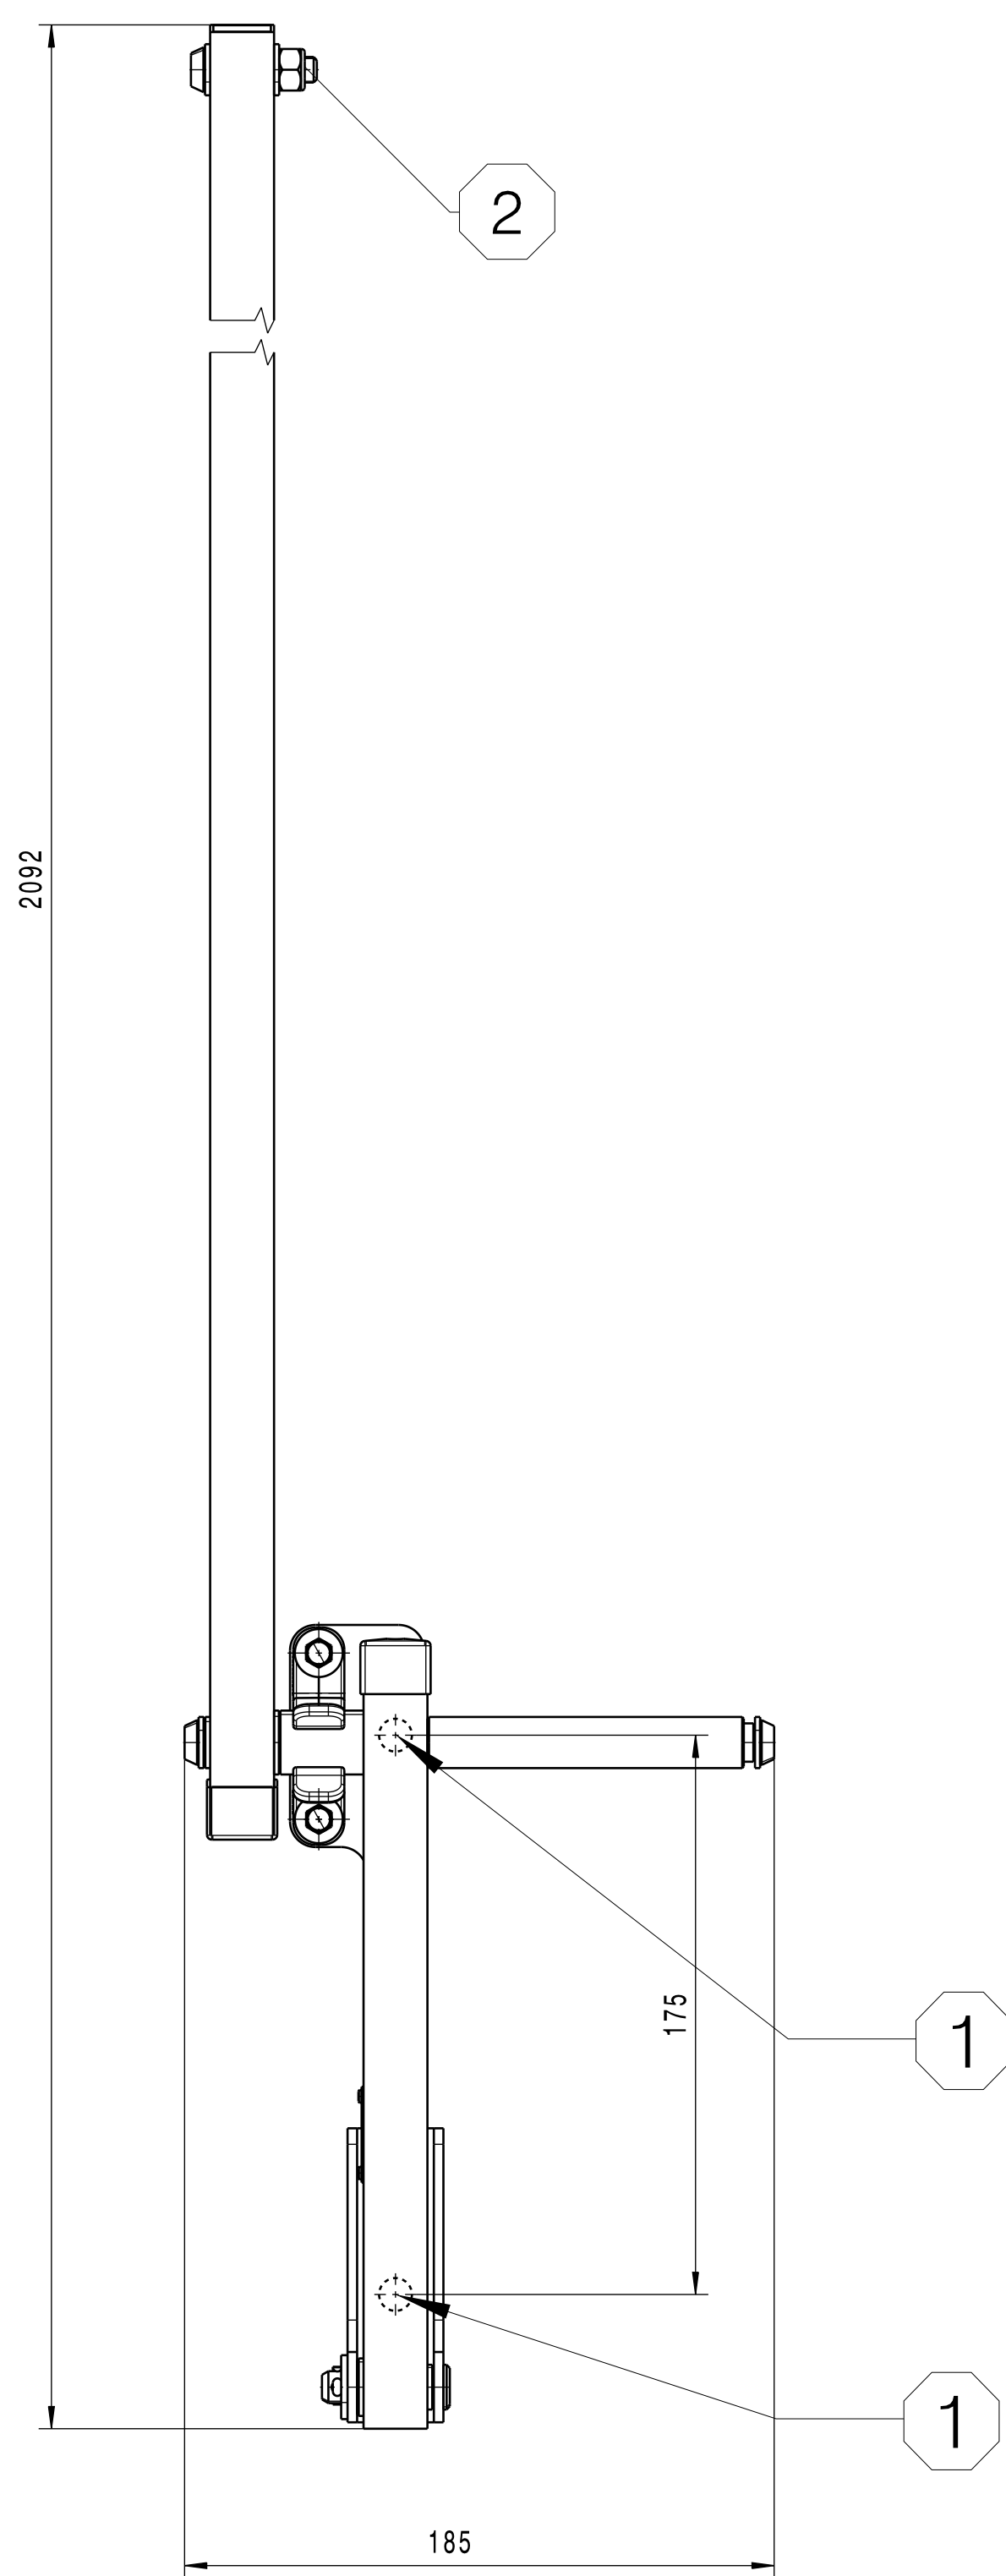

- ① = Min. required torque 25 ± 3 Nm designed for M10 thread. Fastener selection and strength prove of this connection needs to be performed by customer.
- Customer is responsible to avoid damages at his trailer door. Customer should do his own screw calculation.
- ② = Tightening moment $3^{+0.5}_{-0}$ Nm.

BEFORE MOUNTING, PLEASE CHECK THE OPTIFLOW™ TAIL INSTALLATION MANUAL FOR FURTHER DETAILS
CONSULT COMPLETE ASSEMBLY INSTALLATION DRAWING FOR DETAILED HOLE POSITIONING

General Specifications: JED-334-1, Size ISO 14046 LP					Copyright WABCO *		WABCO				
Further Technical Data:					Date _____ Signature _____						
Doc. Code:		Sheets: To _____			2015-03-27 Ekvotor		LIFTING ROD std R				
General Tolerances JED-261					Checked _____						
Range of Nominal Dimensions (mm)					2015-07-15 L. Ramirez Expert L. Ramirez		Manufacturer codes: 032_03_SV362				
Class 1)	≤ 50	> 50 ≤ 100	> 100 ≤ 180	> 180 ≤ 400	3-	Mass	Metal No.		Date of first issue		
	Fine	0,5	1,0	1,5		2,0	1.8 Kg	Size	Doc.Code	Language	Sheet
	Medium	1,0	2,0	3,0		4,0	4 Kg	005	EN	1/1	
	Coarse	2,0	3,5	5,0		6,5	6 Kg				
Tapped Holes acc. _____					A 1 CATIA		EDN No.		Revision	Tech. Resp.	Replacement for
1) Tolerance Class Applied Crossmarked											