
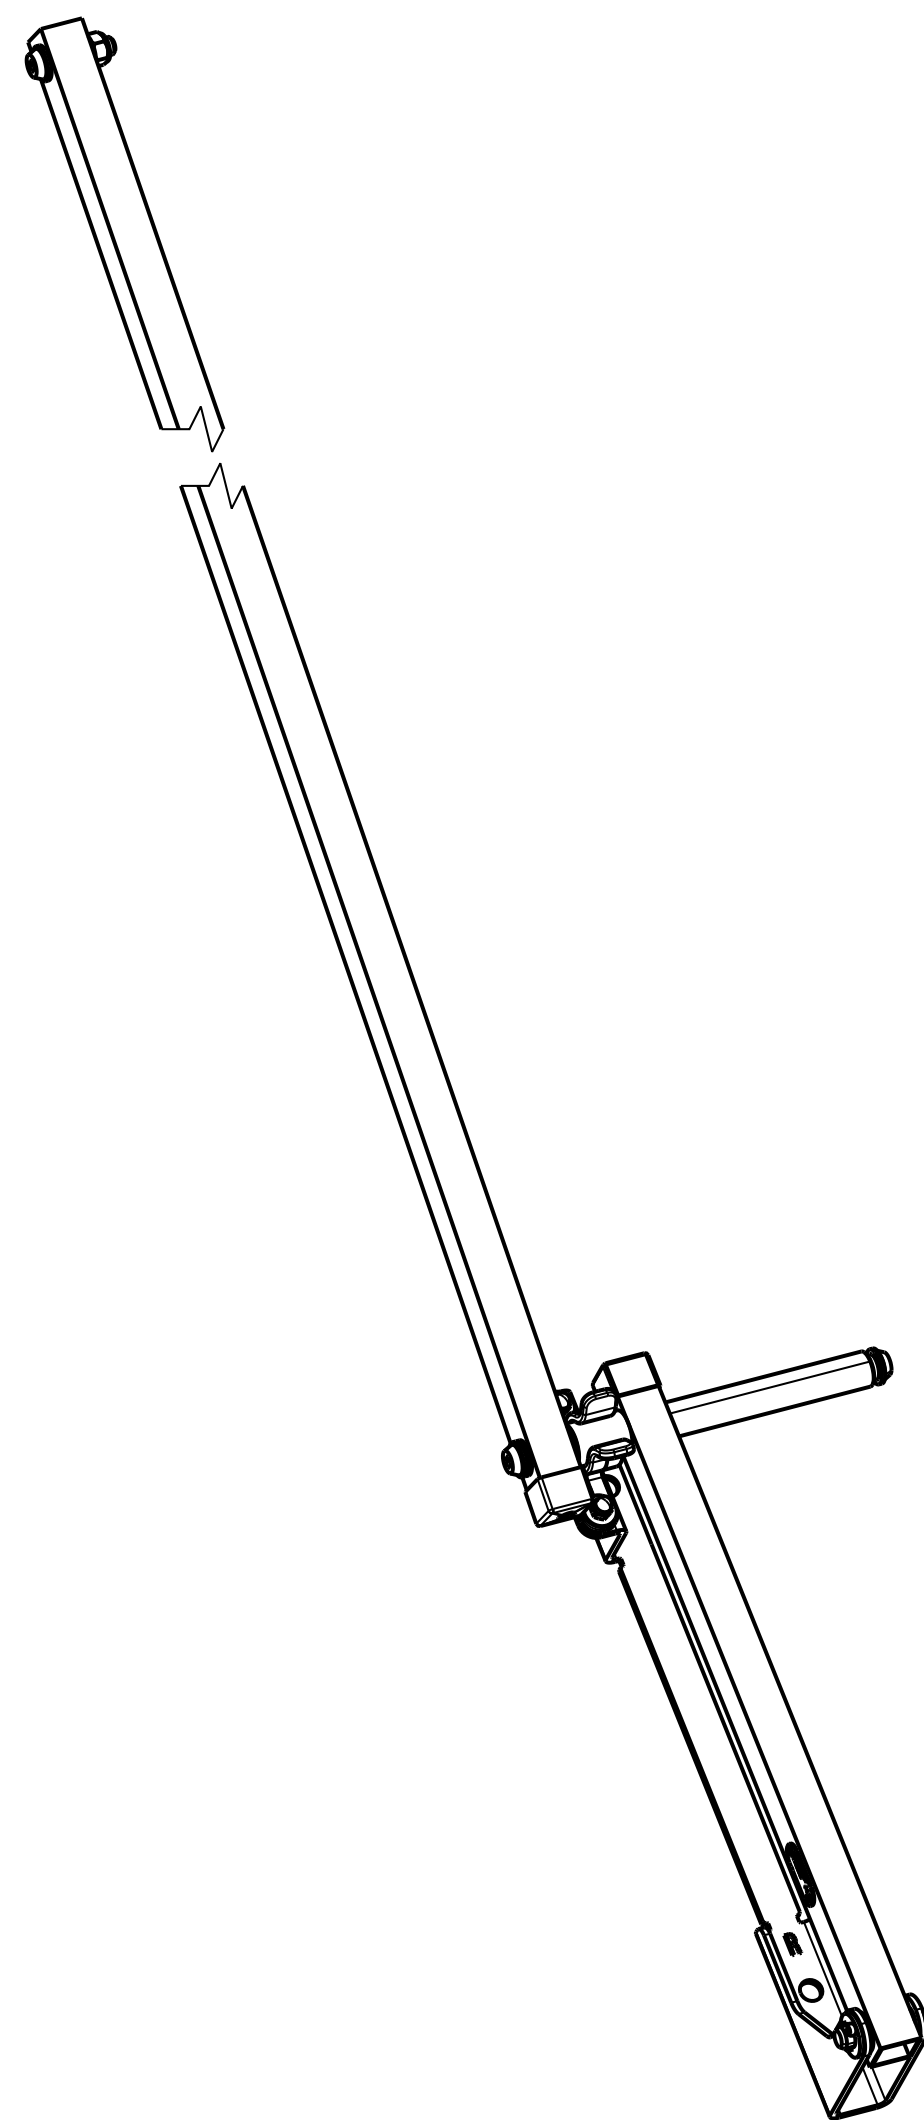


Touta Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un acte évaluable et expose son auteur au versement de dommages et intérêts, sous forme de propriété industrielle réservée, notamment en matière de brevets et de modèles.

Die gesamte Kommunikation oder Reproduktion dieses Dokuments, die Verwertung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich angegeben. Zuwiderhandlungen stellen einen offensichtlich schädlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte vom 1. April 1971 der Patentreichung sind über das ausschließliche Verbot.

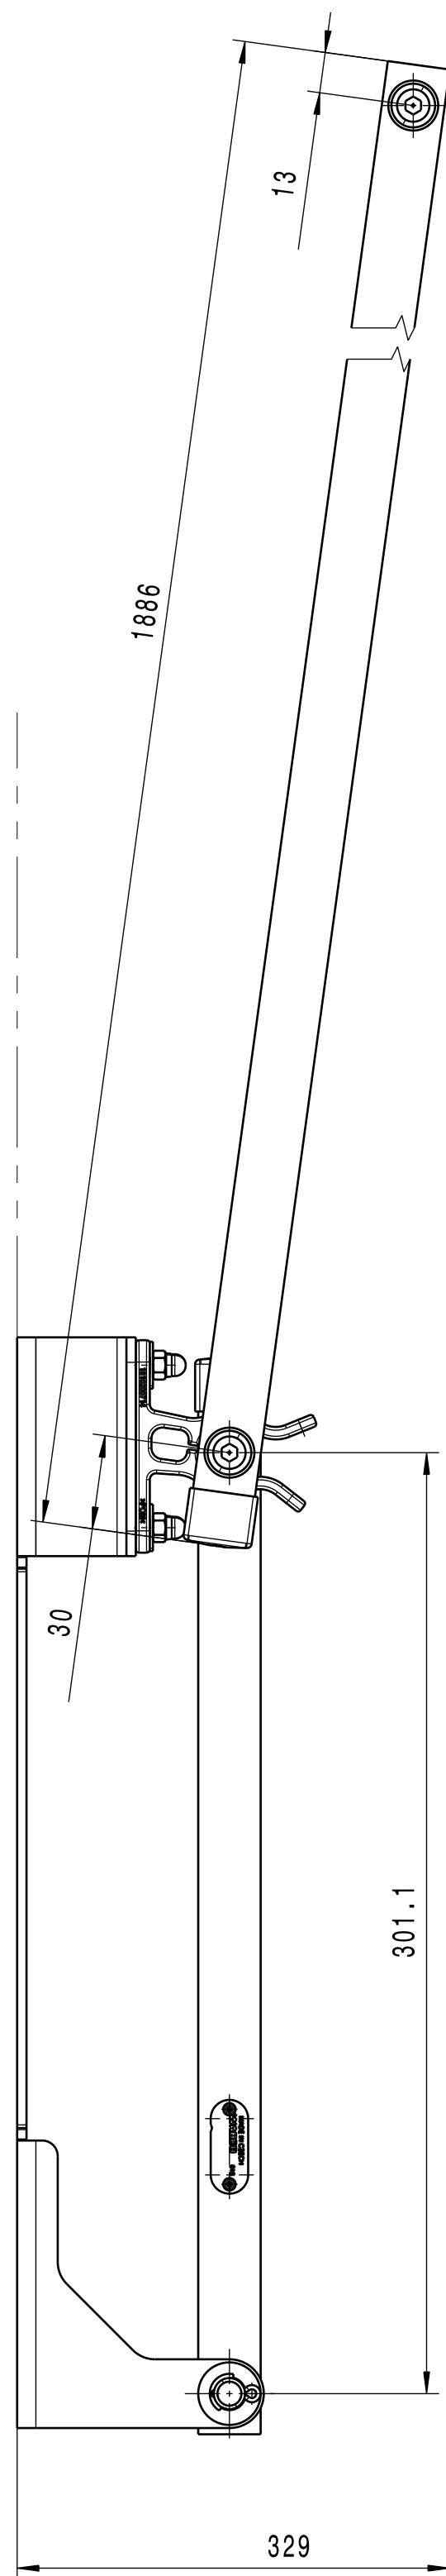

- ① = Min. required torque 25 ± 3 Nm designed for M10 thread. Fastener selection and strength prove of this connection needs to be performed by customer.
Customer is responsible to avoid damages at his trailer door. Customer should do his own screw calculation.
- ② = Tightening moment $3 \cdot 0.5$ Nm.

BEFORE MOUNTING, PLEASE CHECK THE OPTIFLOW™ TAIL INSTALLATION MANUAL FOR FURTHER DETAILS
CONSULT COMPLETE ASSEMBLY INSTALLATION DRAWING FOR DETAILED HOLE POSITIONING

General Specifications: JED-334-1, Size ISO 14485 LP				Copyright WABCO		WABCO																																																			
Further Technical Data				Date / Signature		LIFTING ROD reefer R																																																			
Doc. Codes		Sheets To		2015-03-27 Evektor																																																					
General Tolerances JED-261				Checked		Manufacturer codes																																																			
<table><tr><th colspan="2"></th><th colspan="5">Range of Nominal Dimensions (mm)</th><th></th></tr><tr><th colspan="2"></th><th>≤ 50</th><th>> 50 ≤ 100</th><th>> 100 ≤ 180</th><th>> 180 ≤ 400</th><th>> 400</th><th></th></tr><tr><td>Class</td><td>13</td><td></td><td></td><td></td><td></td><td></td><td>3~</td></tr><tr><td>Fine</td><td></td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td><td></td><td></td></tr><tr><td>Medium</td><td></td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td><td></td><td></td></tr><tr><td>Coarse</td><td></td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td><td></td><td></td></tr></table>						Range of Nominal Dimensions (mm)								≤ 50	> 50 ≤ 100	> 100 ≤ 180	> 180 ≤ 400	> 400		Class	13						3~	Fine		0.5	1.0	1.5	2.0			Medium		1.0	2.0	3.0	4.0			Coarse		2.0	3.5	5.0	6.5			2015-07-15 L. Ramirez		032_03_SV365			
		Range of Nominal Dimensions (mm)																																																							
		≤ 50	> 50 ≤ 100	> 100 ≤ 180	> 180 ≤ 400	> 400																																																			
Class	13						3~																																																		
Fine		0.5	1.0	1.5	2.0																																																				
Medium		1.0	2.0	3.0	4.0																																																				
Coarse		2.0	3.5	5.0	6.5																																																				
				Expert L. Ramirez																																																					
Mass		Scale		Material No.		Date of first issue																																																			
1.7 KG		1:2		1812400030		<table><tr><th>Doc. Code</th><th>Language</th><th>Sheet</th></tr><tr><td>005</td><td>EN</td><td>1/1</td></tr></table>		Doc. Code	Language	Sheet	005	EN	1/1																																												
Doc. Code	Language	Sheet																																																							
005	EN	1/1																																																							
Size		CAD System		EDN No.		Revision		Techn. Resp.																																																	
A 1		CATIA						Replacement for																																																	
Tapped Holes acc. -				100mm																																																					
1) Tolerance Class Applied Cross marked																																																									