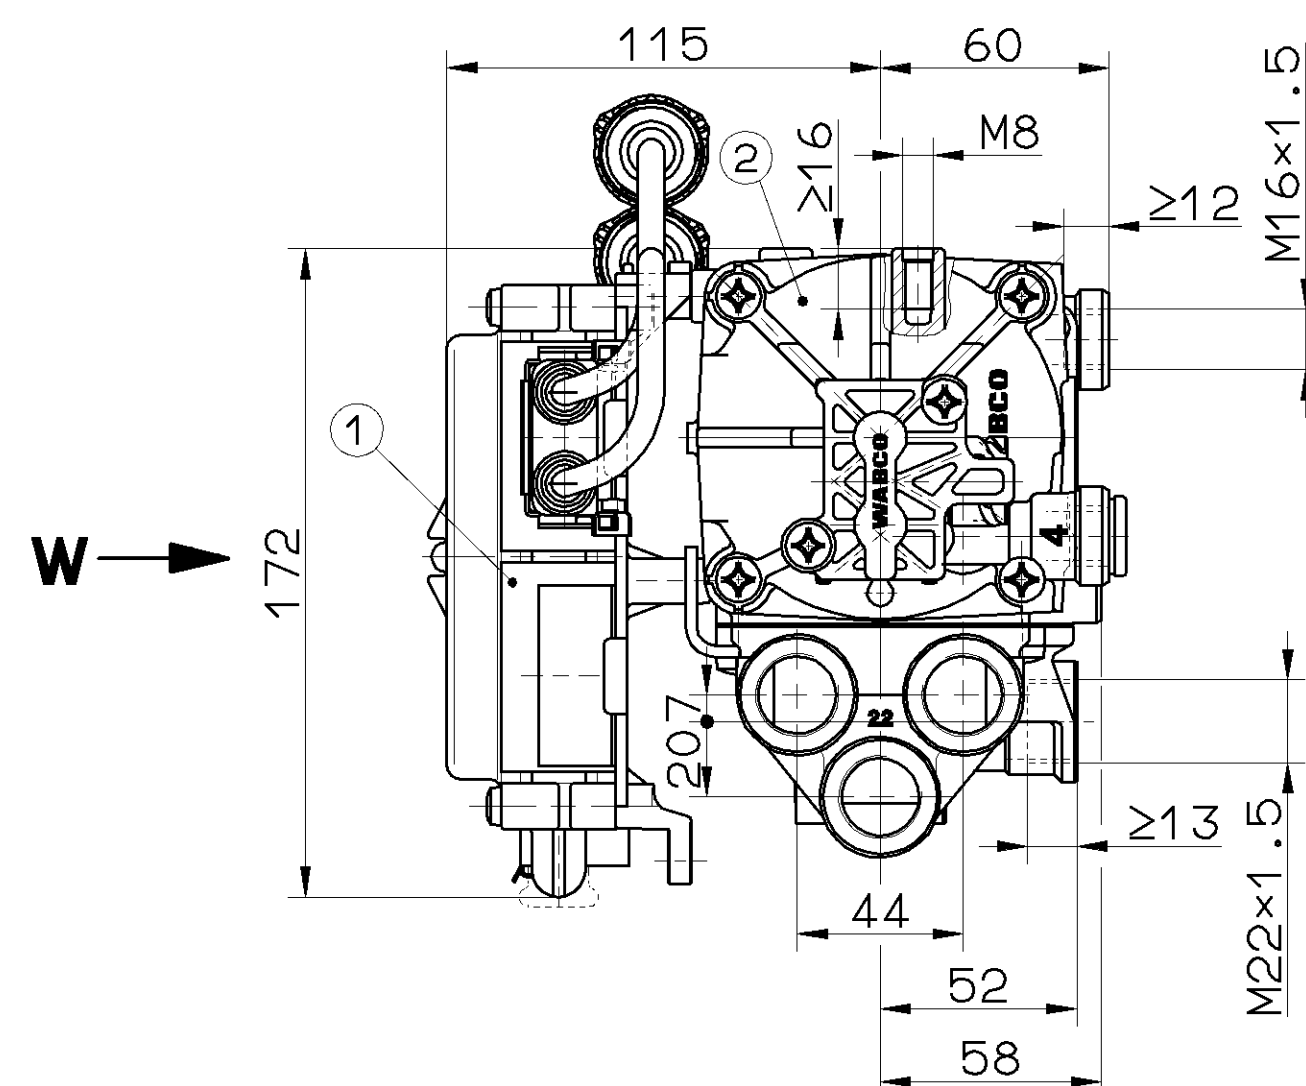
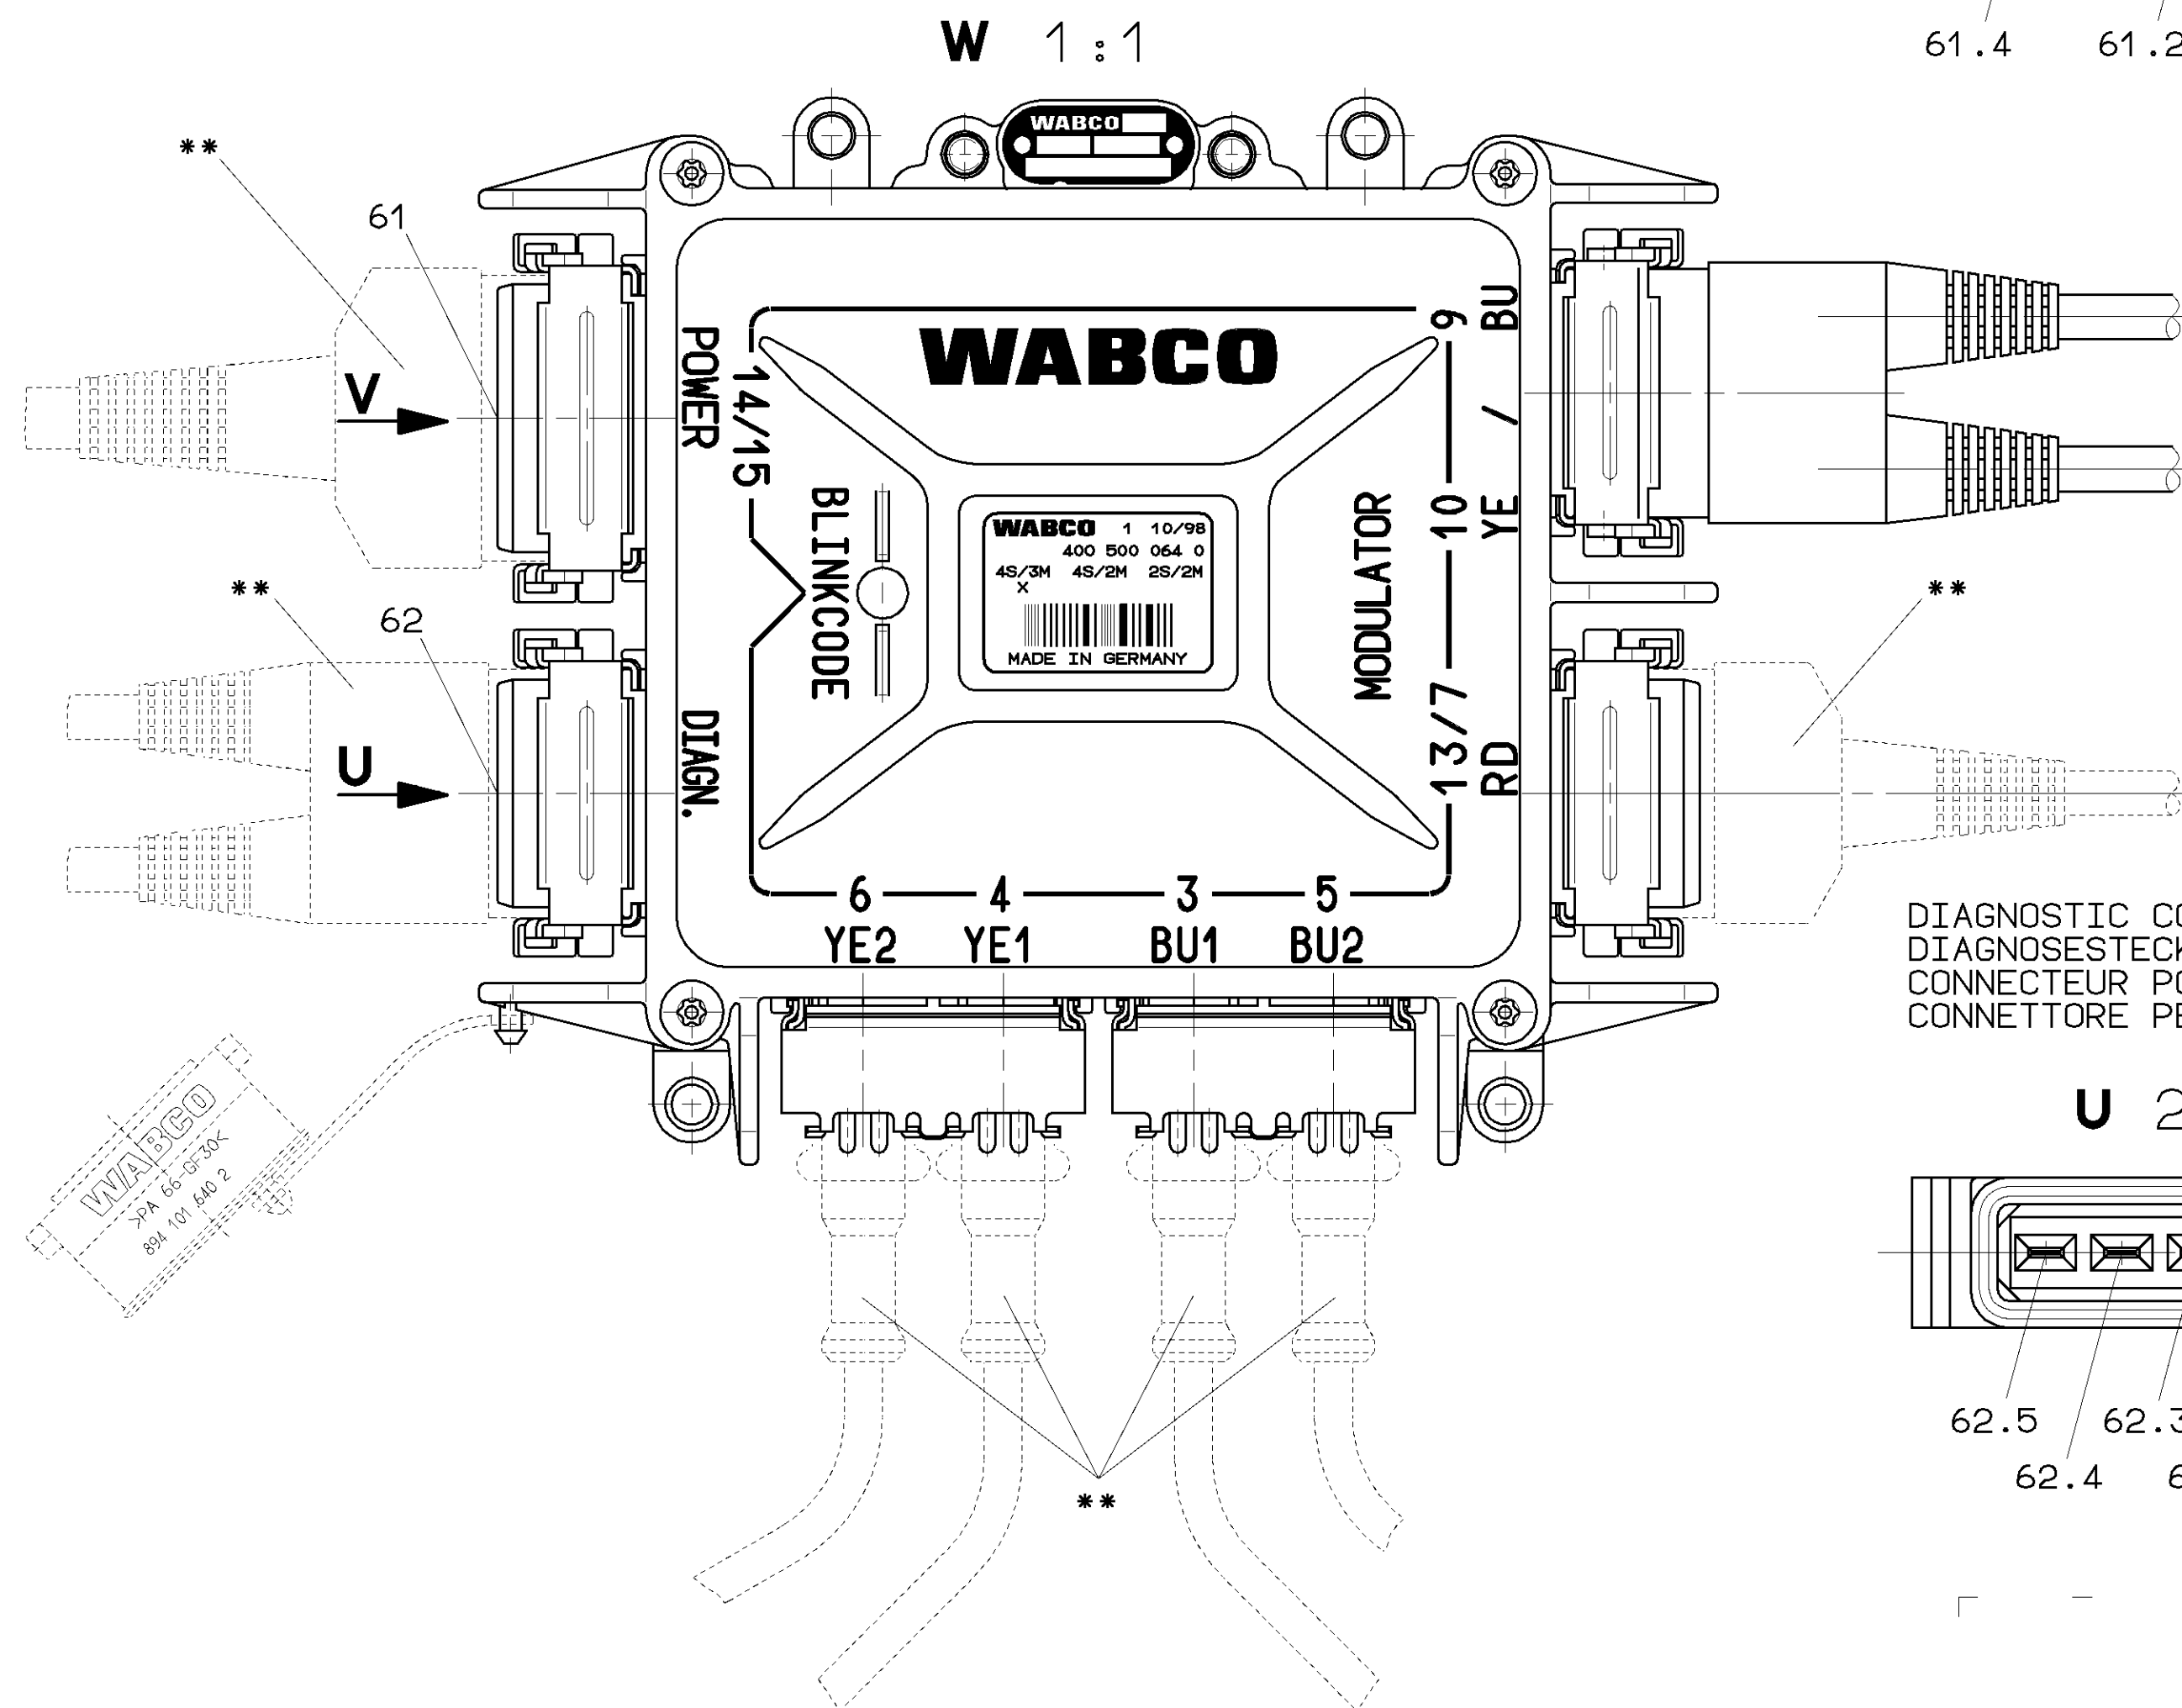



[illegible]
$$U_N = 24V \text{ DC}$$

IP 66 } IEC 529/EN 60529
IP 69K } DIN 40050 Bl.9

-40° C +65° C

$$\begin{aligned} \text{M16} \times 1.5: \quad M_{\max} &= 34 \text{ Nm} \\ \text{M22} \times 1.5: \quad M_{\max} &= 53 \text{ Nm} \end{aligned}$$

V 2:1

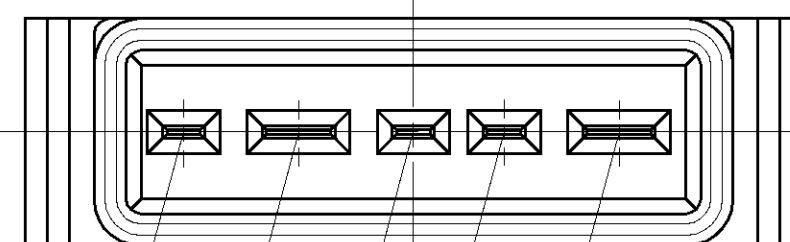

61.5 / 61.3 / 61.1
61.4 / 61.2

61.1	24V DC POWER SUPPLY
	24V DC STROMVERSORGUNG

61.2	24V DC POWER SUPPLY ECU
	24V DC STROMVERSORGUNG ECU

61.3	GROUND MASSE MASSE MASSA
------	-----------------------------------

61.4	GROUND MASSE MASSE MASSA
------	-----------------------------------

```
61.5  WARNING LAMP
      WARNLAMPE
      LAMPE TEMOIN
      LUCE SPIA
```

62.1 K-LINE ISO 9141 - DIAGNOSIS
K-LEITUNG ISO 9141 - DIAGNOSE

62.2 L-LINE ISO 9141 - DIAGNOSIS
L-LEITUNG ISO 9141 - DIAGNOSE


62.3 24V DC POWER SUPPLY FOR
OTHER WABCO DEVICES
24V VERSORGUNG FUER WEITERE
WABCO-GERAETE

62.4	GROUND MASSE MASSE MASSA
------	-----------------------------------

62.5 SPEED SIGNAL
PWM(GESCHWINDIGKEITSSIGNAL)

DIAGNOSTIC CONNECTOR
DIAGNOSESTECKER
CONNECTEUR POUR DIAGNOSTIC
CONNETTORE PER DIAGNOSI

U 2:1

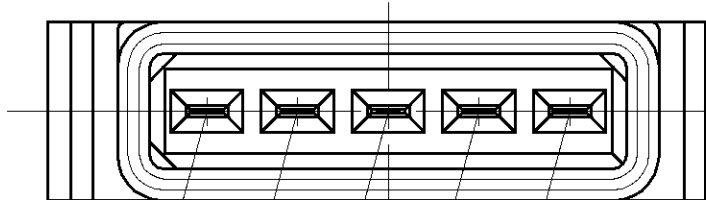

62.5 / 62.3 / 62.1
62.4 / 62.2

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

NUMBER NUMBER NUMERO NUMERO	PART-NO. TEILE-NR. Nº DE PIECE Nº DEL PEZZO
①	446 108 030 0
②	472 195 043 0

* APPLICATION ACCORDING TO PRODUCT SPECIFICATION
VERWENDUNG GEMAESS PRODUKT SPEZIFIKATION

*** APPLICATION OF CABLES WITH CONNECTOR DELIVERED OR RELEASED BY WABCO ONLY
NUR VON WABCO DELIVERTE BZW. VON WABCO FREIGEGBENE LEITUNGEN INCL. KUPPLUNGEN VERWENDEN

GENERAL SPECIFICATION: JED-354				CADAM-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE: SIGNATURE:			
DOC. CODE: SHEET: TO				DRAWN: 98-01-05 HARNISCHM		VARIO-COMPACT-ABS	
GENERAL TOLERANCES				CHECKED: 98-01-05 HOEFLER		VARIO-KOMPAKT-ABS	
RANGE OF NOMINAL DIMENSIONS (± mm)				STANDARDIZATION:		VARIO-COMPACT ABS	
CLASS 1)	≤50	> 50 ≤180	>180 ≤400	>400		VARIO-KOMPACTO ABS	
FINE	0,5	1,0	1,5	2,0			
MEDIUM	1,0	2,0	3,0	4,0			
COARSE	2,0	3,5	5,0	6,5			
TAPPED HOLES ACC. ISO 4039 / JED-182							
1) TOLERANCE CLASS APPLIED CROSSHATCHED		CONV.NO.		REV.		DATE	
9		100mm		EXPERT CONF		7/6/0	
						PRODUCT TYPE 0121	

H