


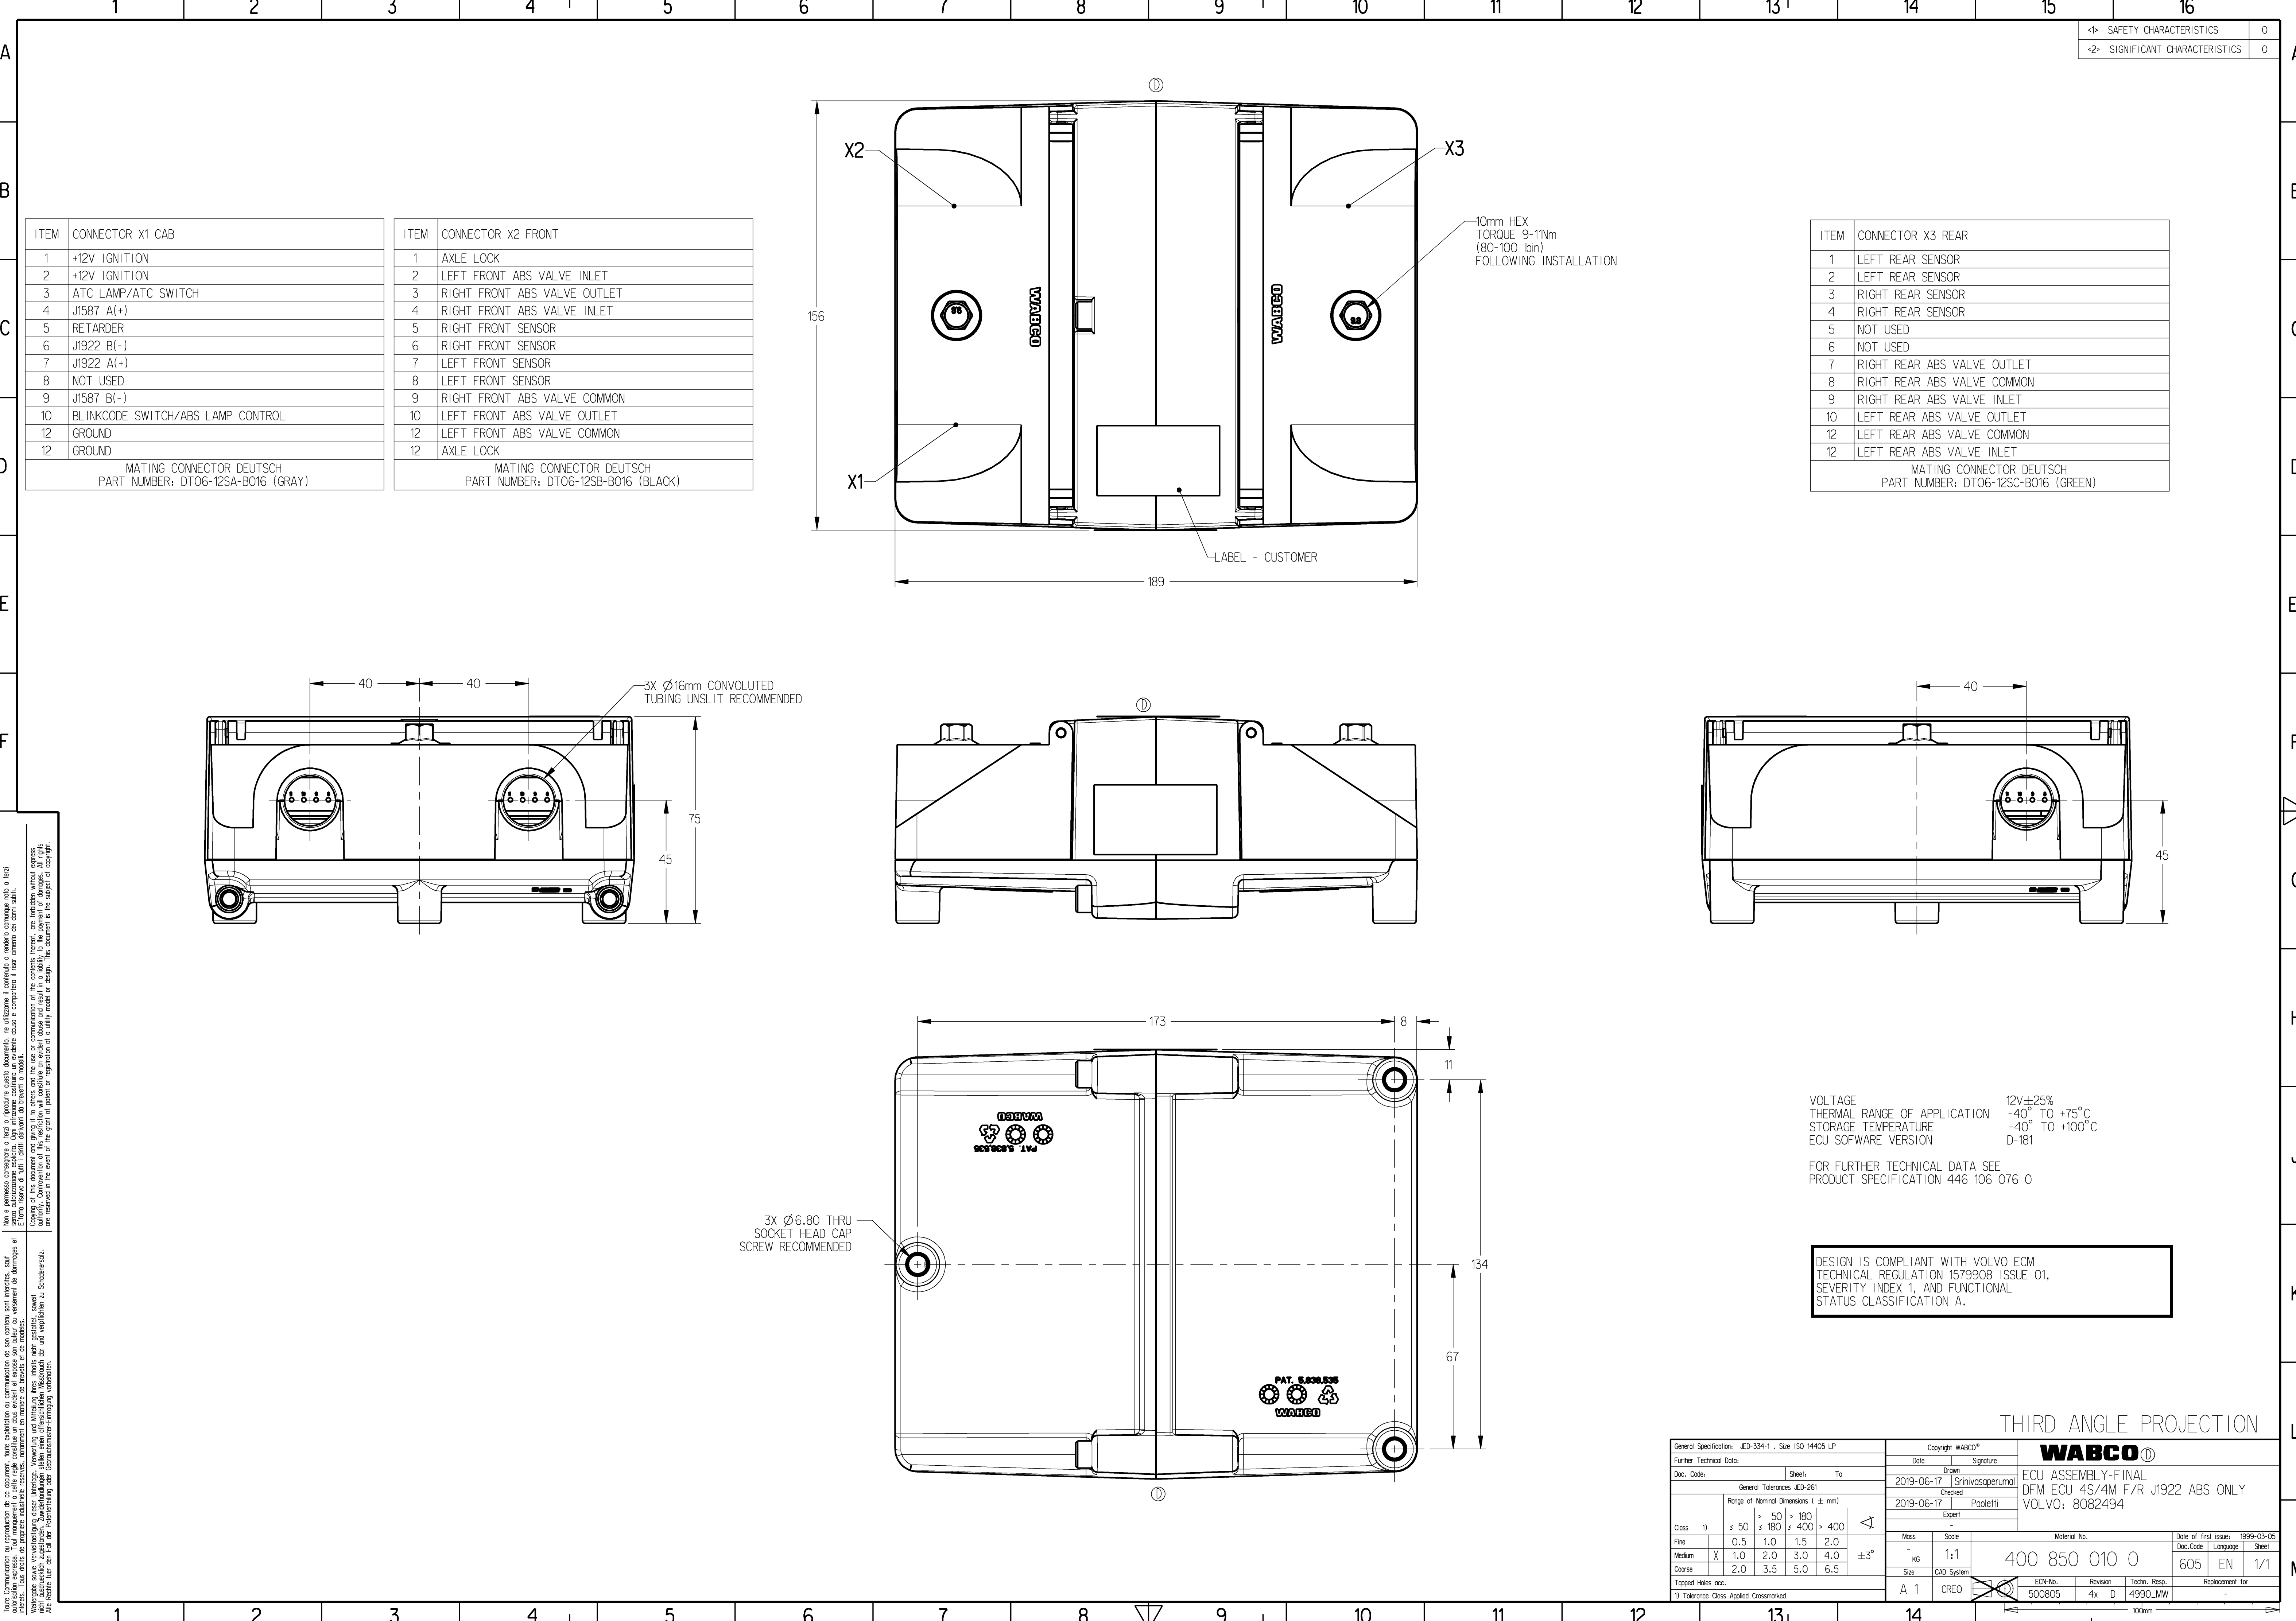

ITEM	CONNECTOR X1 CAB	ITEM	CONNECTOR X2 FRONT
1	+12V IGNITION	1	AXLE LOCK
2	+12V IGNITION	2	LEFT FRONT ABS VALVE INLET
3	ATC LAMP/ATC SWITCH	3	RIGHT FRONT ABS VALVE OUTLET
4	J1587 A(+)	4	RIGHT FRONT ABS VALVE INLET
5	RETARDER	5	RIGHT FRONT SENSOR
6	J1922 B(-)	6	RIGHT FRONT SENSOR
7	J1922 A(+)	7	LEFT FRONT SENSOR
8	NOT USED	8	LEFT FRONT SENSOR
9	J1587 B(-)	9	RIGHT FRONT ABS VALVE COMMON
10	BLINKCODE SWITCH/ABS LAMP CONTROL	10	LEFT FRONT ABS VALVE OUTLET
12	GROUND	12	LEFT FRONT ABS VALVE COMMON
12	GROUND	12	AXLE LOCK

ITEM	CONNECTOR X3 REAR
1	LEFT REAR SENSOR
2	LEFT REAR SENSOR
3	RIGHT REAR SENSOR
4	RIGHT REAR SENSOR
5	NOT USED
6	NOT USED
7	RIGHT REAR ABS VALVE OUTLET
8	RIGHT REAR ABS VALVE COMMON
9	RIGHT REAR ABS VALVE INLET
10	LEFT REAR ABS VALVE OUTLET
12	LEFT REAR ABS VALVE COMMON
12	LEFT REAR ABS VALVE INLET

MATING CONNECTOR DEUTSCH
PART NUMBER: DT06-12SC-B016 (GREEN)

VOLTAGE 12V±25%
THERMAL RANGE OF APPLICATION -40° TO +75°C
STORAGE TEMPERATURE -40° TO +100°C
ECU SOFTWARE VERSION D-181

FOR FURTHER TECHNICAL DATA SEE
PRODUCT SPECIFICATION 446 106 076 0

DESIGN IS COMPLIANT WITH VOLVO ECM
TECHNICAL REGULATION 1579908 ISSUE 01,
SEVERITY INDEX 1, AND FUNCTIONAL
STATUS CLASSIFICATION A.

THIRD ANGLE PROJECTION

General Specifications: JED-334-1 - Size ISO 14405 LP		Copyright WABCO®		Date of first issue: 1999-03-05	
Further Technical Data:		Date: 2019-06-17		Doc. Code: 605	
Doc. Code: 605		Sheet: 1		Language: EN	
General Tolerances JED-261		Drawn: Srinivasaperumal		Sheet: 1/1	
Range of Nominal Dimensions (± mm)		Checked: Paoletti		Replacement for: -	
Class 1) 0.5 1.0 1.5 2.0 2.5 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 12.0 15.0 20.0 25.0 30.0 40.0 50.0 63.0 80.0 100.0 125.0 160.0 200.0 250.0 315.0 400.0 500.0 630.0 800.0 1000.0		Expert: -		Material No. 400 850 010 0	
Fine 0.5 1.0 1.5 2.0 2.5 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 12.0 15.0 20.0 25.0 30.0 40.0 50.0 63.0 80.0 100.0 125.0 160.0 200.0 250.0 315.0 400.0 500.0 630.0 800.0 1000.0		Mass: 1.1		Date of first issue: 1999-03-05	
Medium 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 12.0 15.0 20.0 25.0 30.0 40.0 50.0 63.0 80.0 100.0 125.0 160.0 200.0 250.0 315.0 400.0 500.0 630.0 800.0 1000.0		Size: 4x D		Doc. Code: 605	
Coarse 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 12.0 15.0 20.0 25.0 30.0 40.0 50.0 63.0 80.0 100.0 125.0 160.0 200.0 250.0 315.0 400.0 500.0 630.0 800.0 1000.0		CAD System: CREO		Language: EN	
Tapped Holes acc. 1) Tolerance Class Applied Crossmarked		ECN No. 500805		Revision: 4x D	
		Techn. Resp. 4990_MW		Replacement for: -	