


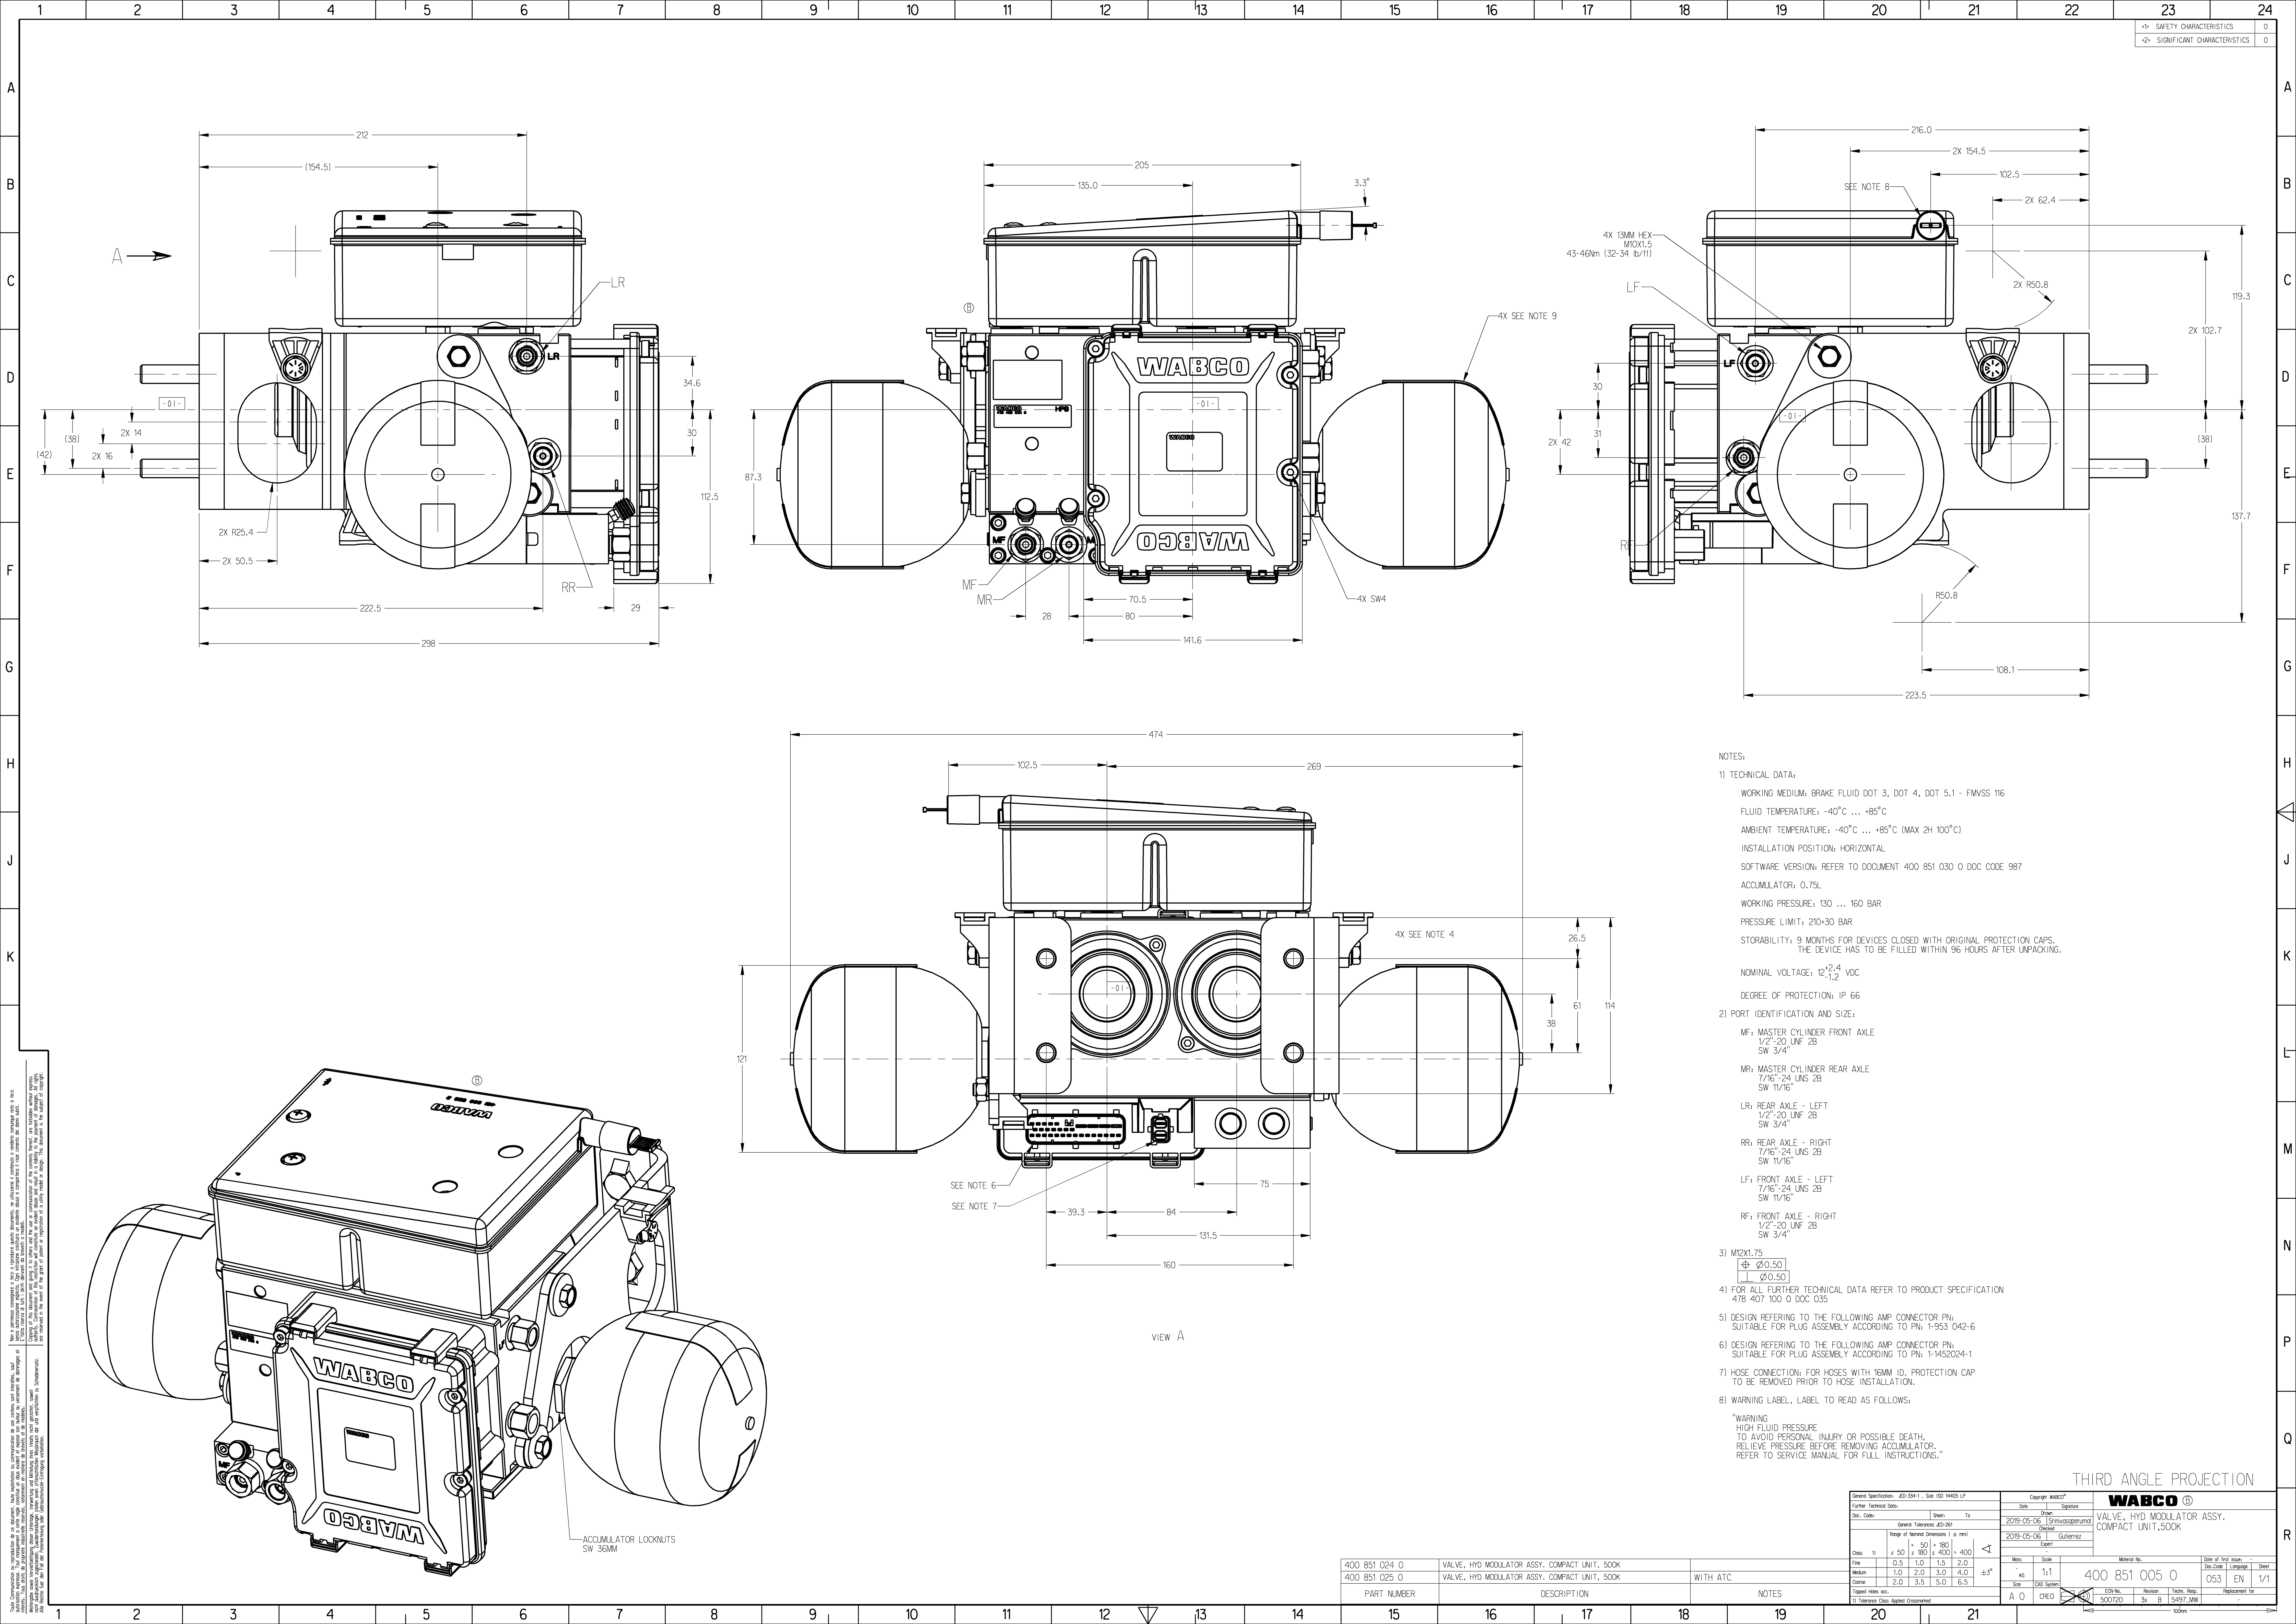

NOTES:

1) TECHNICAL DATA:

WORKING MEDIUM: BRAKE FLUID DOT 3, DOT 4, DOT 5.1 - FMVSS 116
FLUID TEMPERATURE: -40°C ... +85°C
AMBIENT TEMPERATURE: -40°C ... +85°C (MAX 2H 100°C)
INSTALLATION POSITION: HORIZONTAL
SOFTWARE VERSION: REFER TO DOCUMENT 400 851 030 O DOC CODE 987
ACCUMULATOR: 0.75L
WORKING PRESSURE: 130 ... 160 BAR
PRESSURE LIMIT: 210±30 BAR
STORABILITY: 9 MONTHS FOR DEVICES CLOSED WITH ORIGINAL PROTECTION CAPS.
THE DEVICE HAS TO BE FILLED WITHIN 96 HOURS AFTER UNPACKING.

NOMINAL VOLTAGE: 12^{2,4} VDC
DEGREE OF PROTECTION: IP 66

2) PORT IDENTIFICATION AND SIZE:

MF: MASTER CYLINDER FRONT AXLE
1/2"-20 UNF 2B
SW 3/4"

MR: MASTER CYLINDER REAR AXLE
7/16"-24 UNS 2B
SW 11/16"

LR: REAR AXLE - LEFT
1/2"-20 UNF 2B
SW 3/4"

RR: REAR AXLE - RIGHT
7/16"-24 UNS 2B
SW 11/16"

LF: FRONT AXLE - LEFT
7/16"-24 UNS 2B
SW 11/16"

RF: FRONT AXLE - RIGHT
1/2"-20 UNF 2B
SW 3/4"

3) M2X1.75

Ø0.50
Ø0.50

4) FOR ALL FURTHER TECHNICAL DATA REFER TO PRODUCT SPECIFICATION
478 407 100 O DOC 035

5) DESIGN REFERRING TO THE FOLLOWING AMP CONNECTOR PN:
SUITABLE FOR PLUG ASSEMBLY ACCORDING TO PN: 1-953 042-6

6) DESIGN REFERRING TO THE FOLLOWING AMP CONNECTOR PN:
SUITABLE FOR PLUG ASSEMBLY ACCORDING TO PN: 1-1452024-1

7) HOSE CONNECTION: FOR HOSES WITH 16MM ID, PROTECTION CAP
TO BE REMOVED PRIOR TO HOSE INSTALLATION.

8) WARNING LABEL, LABEL TO READ AS FOLLOWS:

"WARNING
HIGH FLUID PRESSURE
TO AVOID PERSONAL INJURY OR POSSIBLE DEATH,
RELIEVE PRESSURE BEFORE REMOVING ACCUMULATOR."
REFER TO SERVICE MANUAL FOR FULL INSTRUCTIONS."

THIRD ANGLE PROJECTION

General Specification: 400-534-1 - Size 150 14402 LP				Copyright WABCO®				WABCO®			
Further Technical Data				Date				Signature			
Doc. Code				Sheet				To			
General Tolerances: 400-263				2019-05-06				Srinivasaperumal			
Range of Nominal Dimensions (± mm)				2019-05-06				Quilierrez			
Class 11				Expert				Expert			
Fin				Mass				Scale			
Medium				1:1				Material No.			
Coarse				±3°				400 851 005 0			
Tapped holes acc. to				A 0				Date of first issue			
1) Tolerances Class Applied Unspecified				CRO				Doc. Code			
				EN				Language			
				1/1				Sheet			

400 851 024 0	VALVE, HYD MODULATOR ASSY, COMPACT UNIT, 500K		
400 851 025 0	VALVE, HYD MODULATOR ASSY, COMPACT UNIT, 500K	WITH ATC	
PART NUMBER	DESCRIPTION	NOTES	