
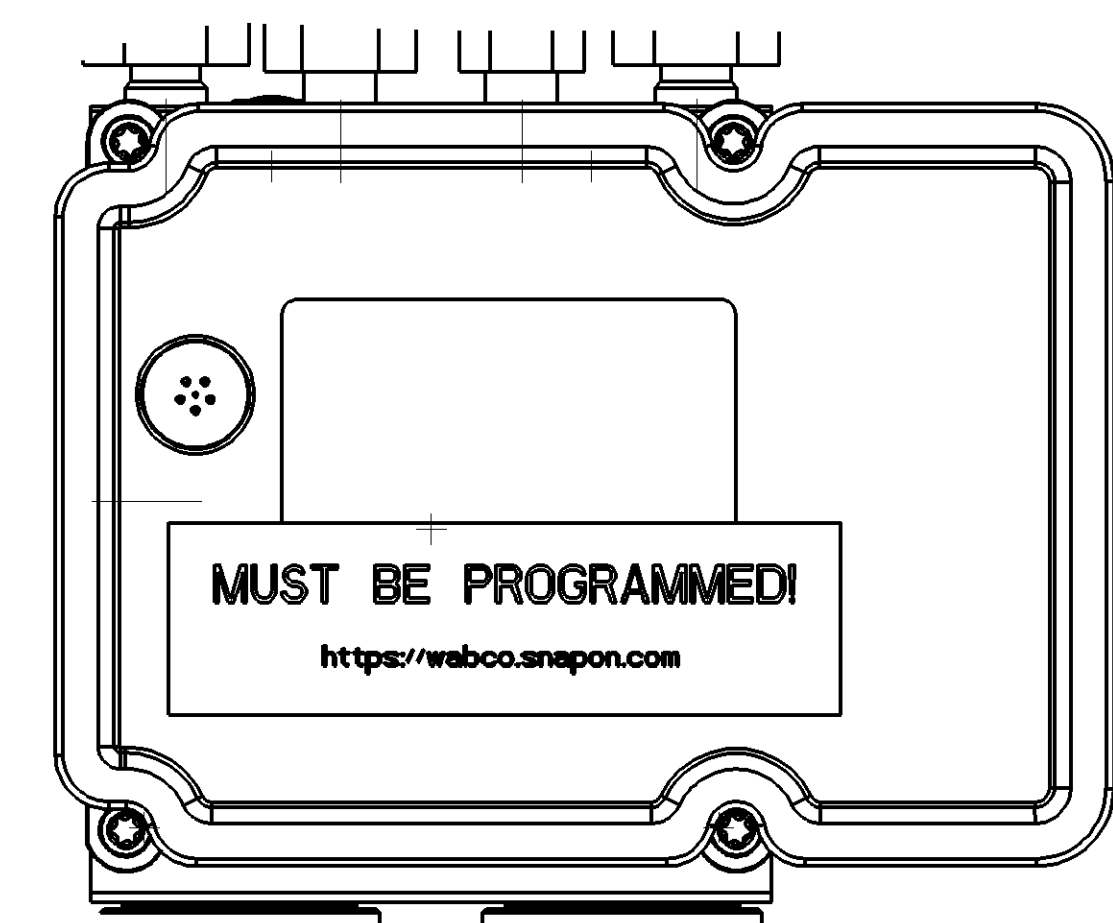
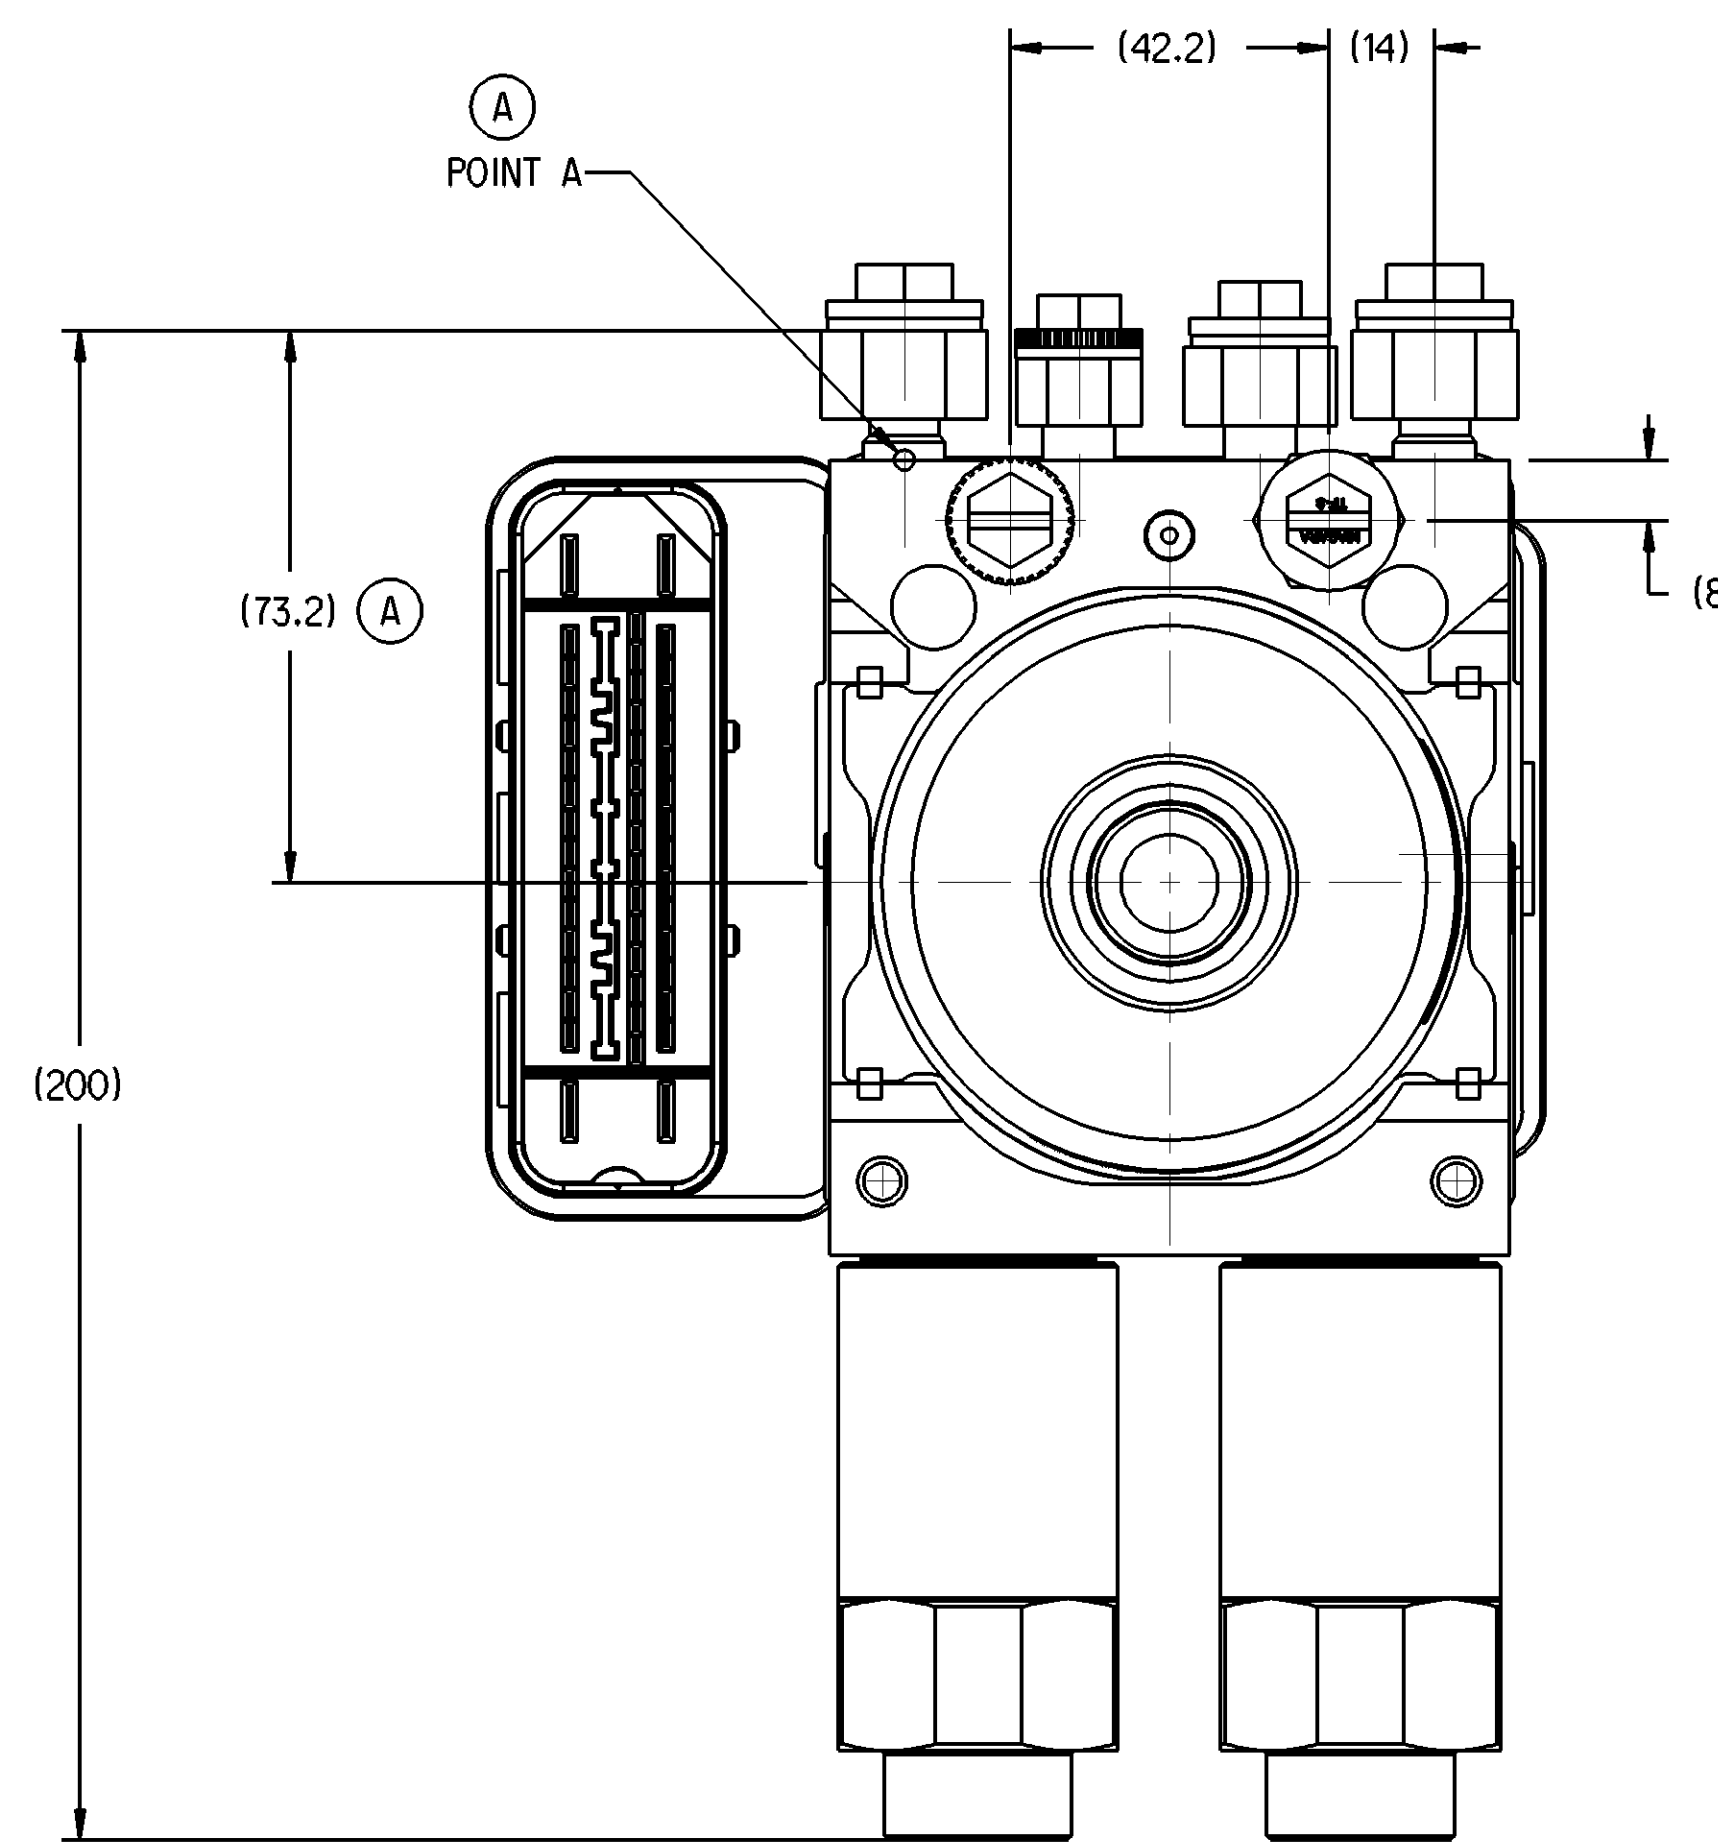



Non è permesso copiare, a fini di riproduzione, questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi.
It is not permitted to copy, for reproduction purposes, this document, nor to use its content or make it known to third parties.
Il copyright di questo documento è riservato a WABCO e la sua divulgazione è vietata senza permesso scritto dalla WABCO.
The copyright of this document is reserved to WABCO and its disclosure without written permission from WABCO is prohibited.
Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

Toute réimpression ou reproduction de ce document, toute exploitation ou communication de son contenu sans autorisation écrite de WABCO sont formellement interdites.
All rights reserved for WABCO in the event of patenting or registration of a utility model or design. This document is the subject of copyright.

Wabco e i suoi prodotti sono marchi registrati di Wabco Corporation o di una delle sue filiali. Tutti i diritti sono riservati. Wabco e i suoi prodotti sono marchi registrati di Wabco Corporation o di una delle sue filiali. Tutti i diritti sono riservati.

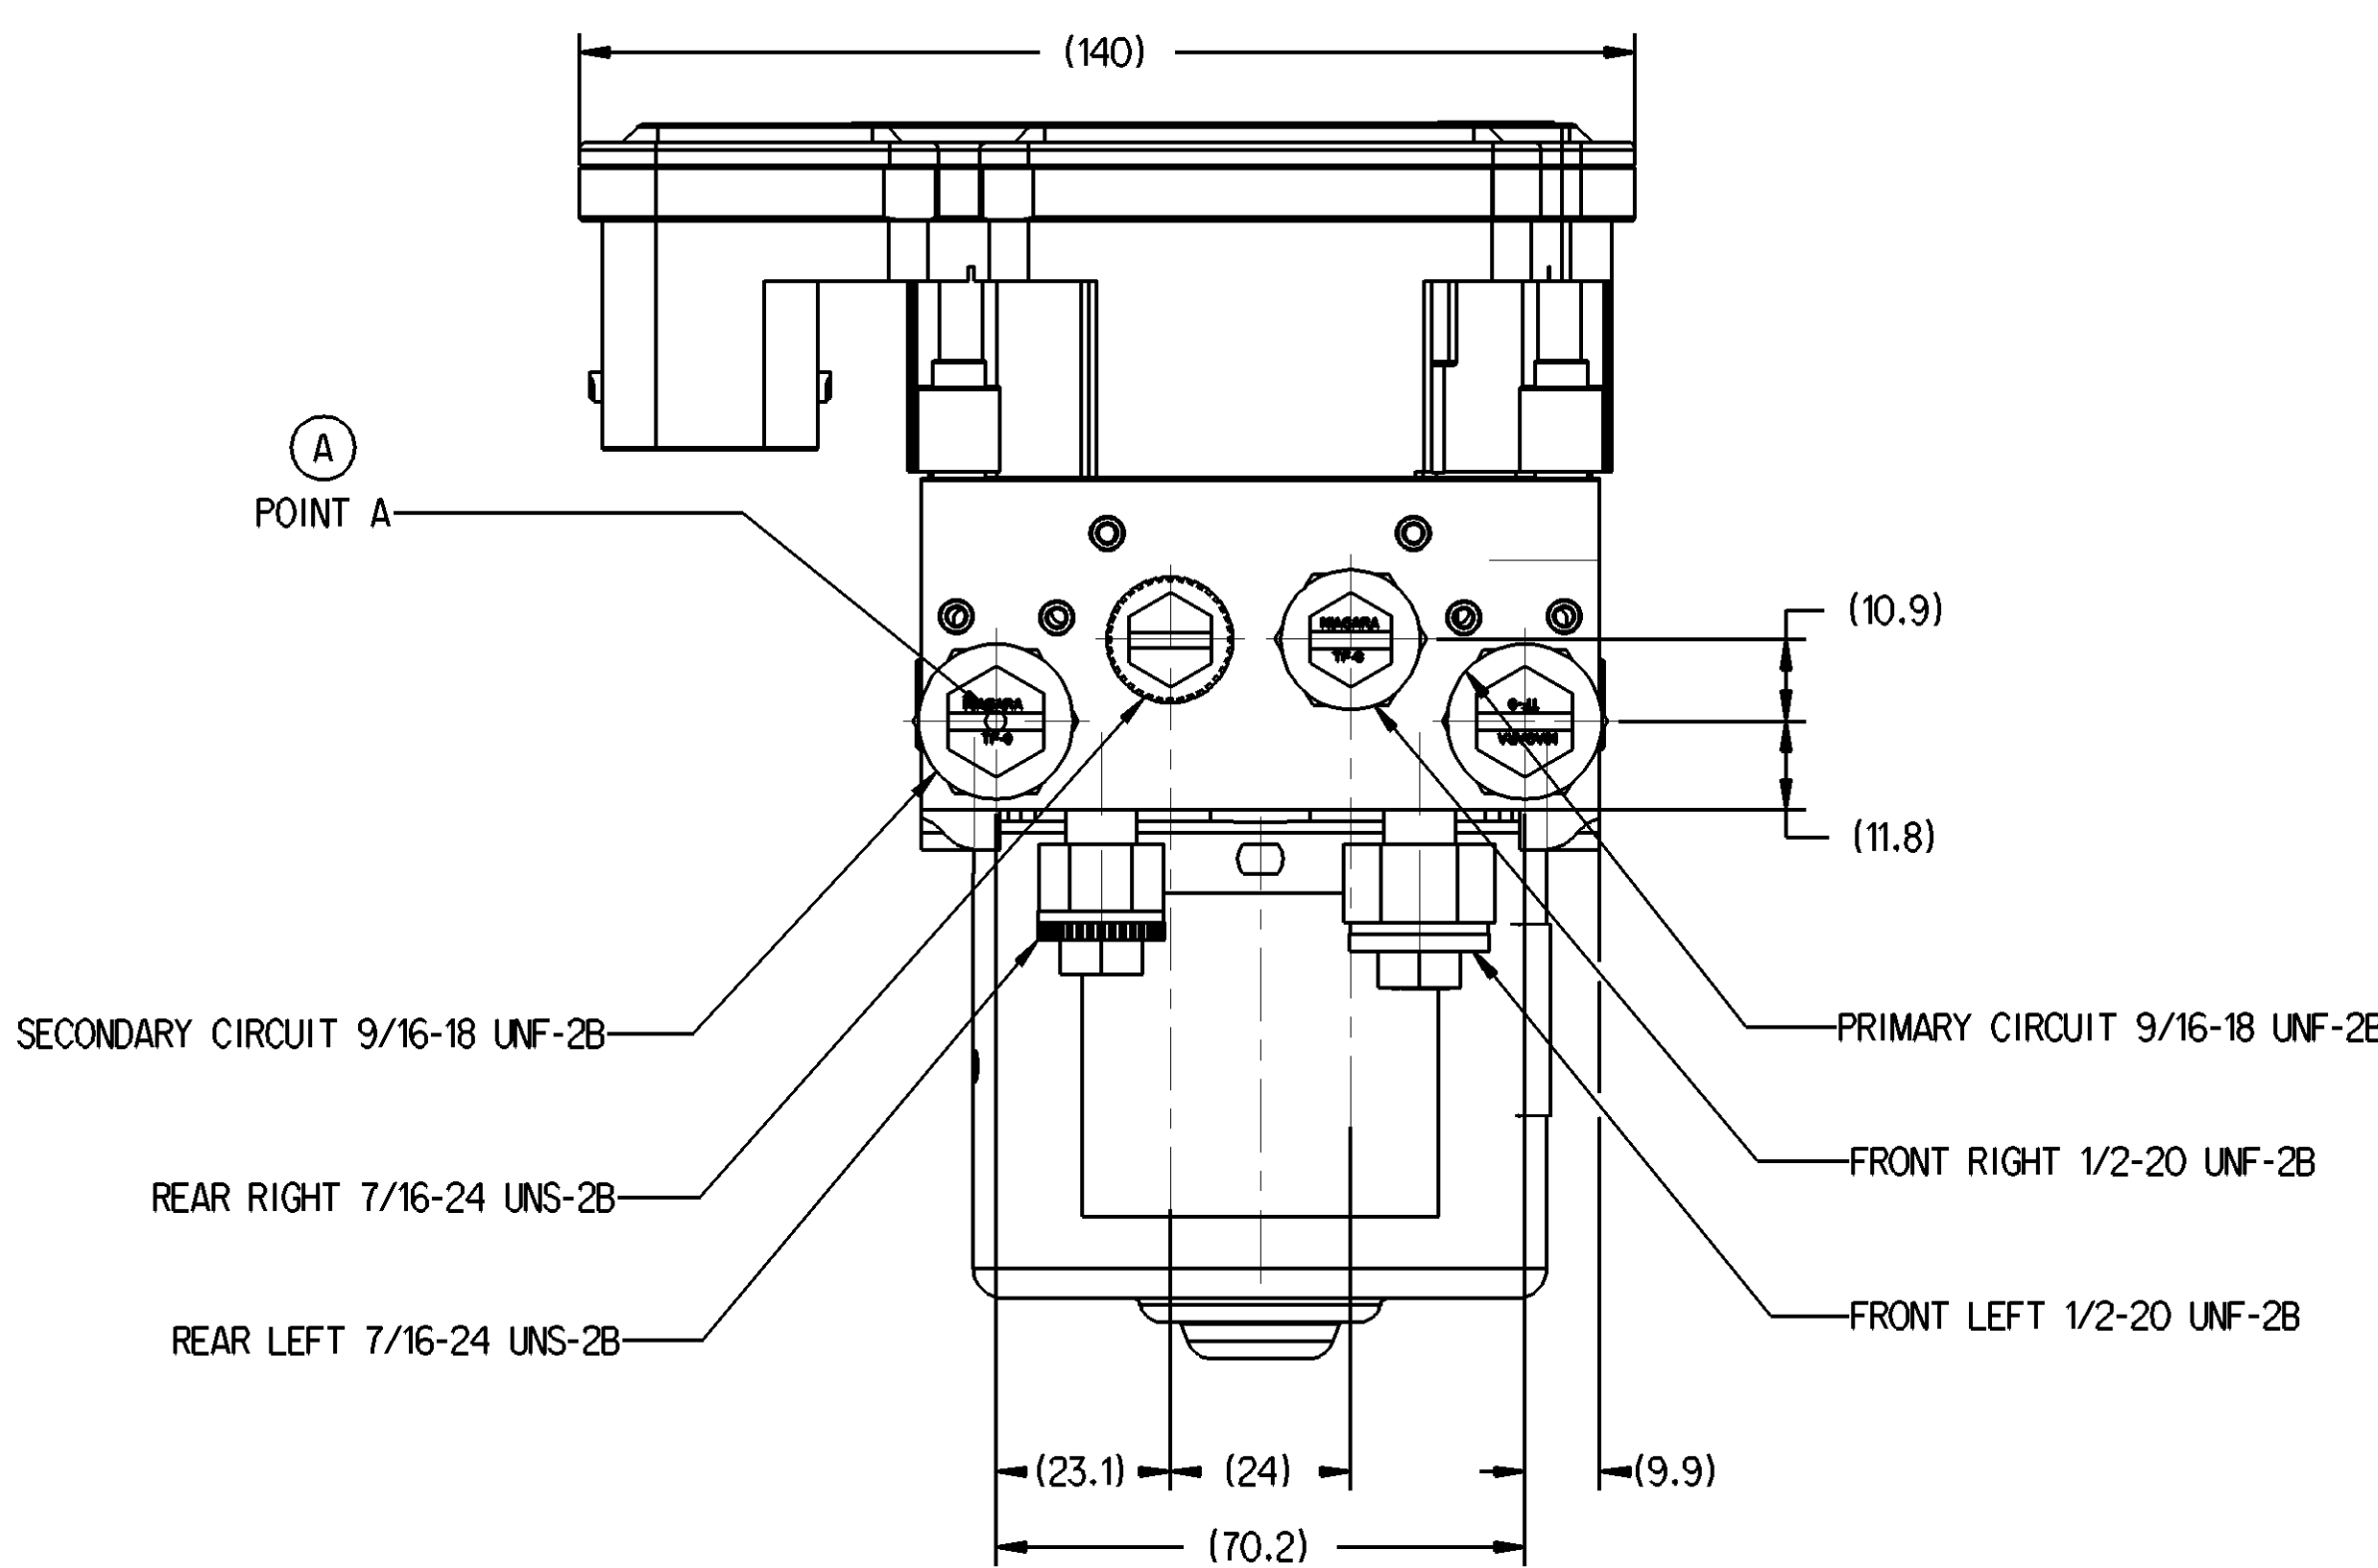

VIEW IN DIRECTION OF ARROW A

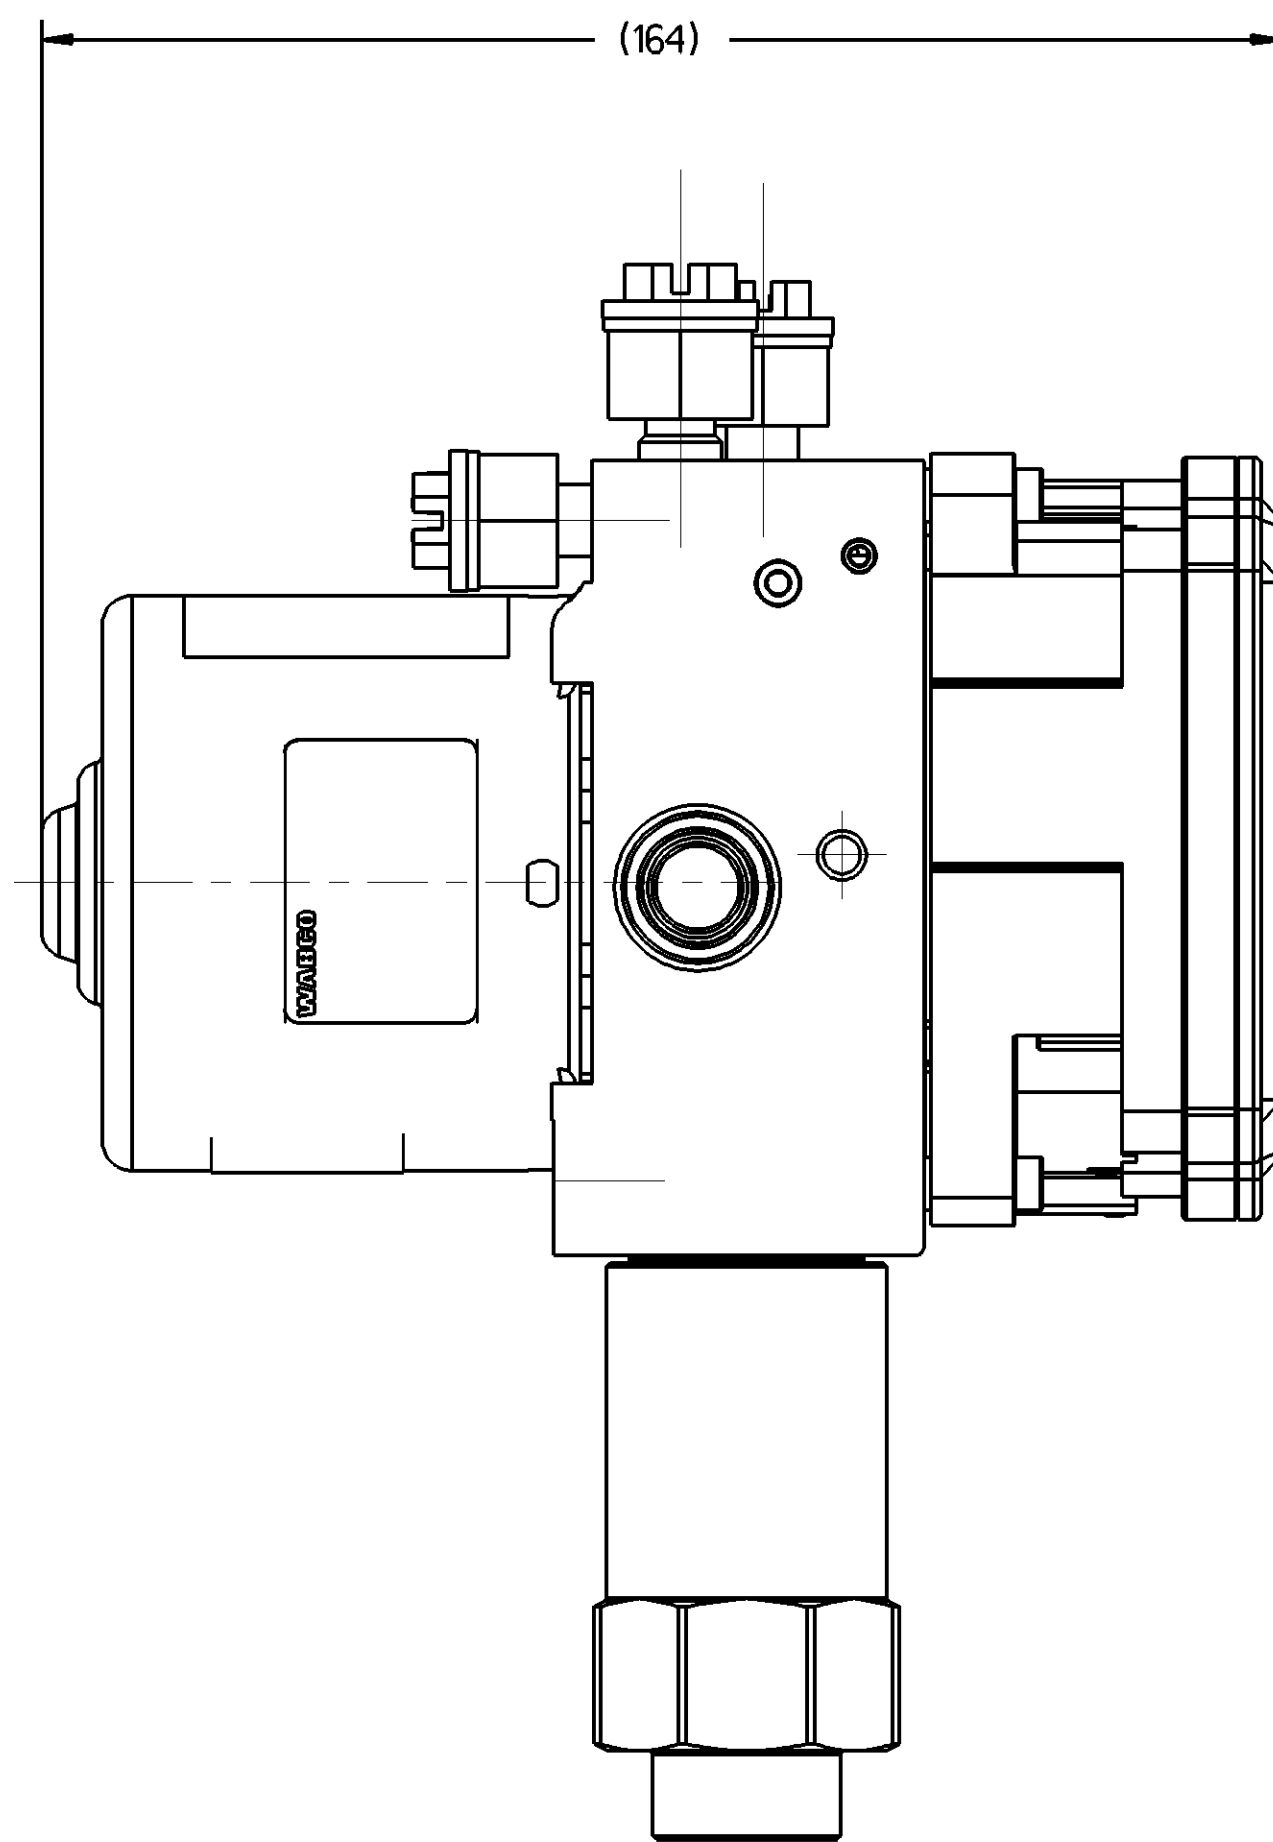


- NOTES:
1. OPERATING MEDIUM: BRAKE FLUID DOT 3/4
 2. OPERATING FLUID: WHEN THE HCU IS FILLED WITH DOT 3/4 BRAKE FLUID IN ACCORDANCE WITH FMVSS 116 IT SHALL FULFILL ALL CONTROL FUNCTION RELATED REQUIREMENTS. THE RESPONSIBILITY FOR COMPATIBILITY BETWEEN THE OEM CHOSEN BRAKE FLUID AND BRAKE SYSTEM LIES WITH THE VEHICLE MANUFACTURER.
 3. FOR 12 VOLT APPLICATION
 4. ENCLOSURE CLASS IP6K9K, ACCORDING TO IEC 529 (DIN 40-050-9)
 5. OPERATING TEMP PER PRODUCT SPECIFICATION: -40 TO +110°C
 6. PLEASE SEE PRODUCTION SPECIFICATION DOC ON PN 478 407 201 0 FOR ADDITIONAL REQUIREMENTS.

THIRD ANGLE PROJECTION

(A)	400 851 510 0	HABS ST ATC (WET)	481 - 511
(A)	400 851 507 0	HABS ST ESC ATC (WET)	481 - 511
(A)	400 851 506 0	HABS ST ATC (WET)	579 - 615
WABCO PART NUMBER		VARIANT	TIRE SIZE RANGE

<I>	SAFETY CHARACTERISTICS	0
<S>	SIGNIFICANT CHARACTERISTICS	0
<C>	CUSTOMER INTERFACE	0

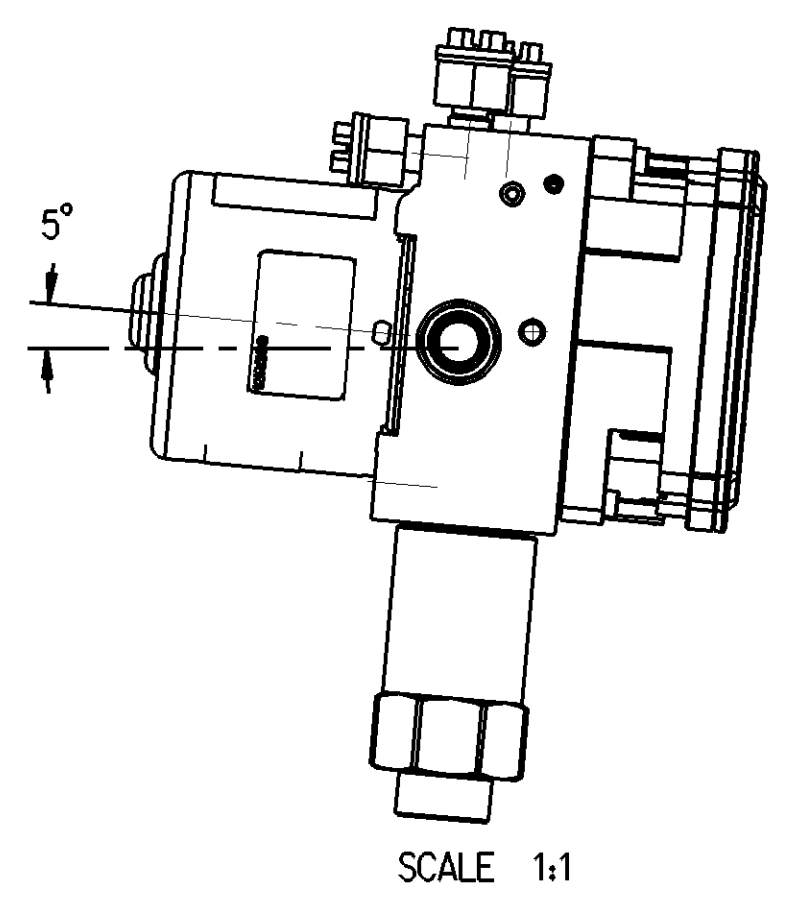

5°±2° IS THE REQUIRED INSTALLATION POSITION TO ALLOW FULL FUNCTIONALITY WITH ALLOWING MOISTURE TO BE DRAINED FROM THE ECU

General Specification: JED-334-1 - Size ISO 14405 LP				Copyright WABCO®			
Further Technical Data:				Date	Drawn	Signature	
Doc. Code:				2021-05-27	Checked	Sutton	HABS ST 250K - (WET)
General Tolerances JED-251				2021-05-28	Checked	Slevens	
Range of Nominal Dimensions (± mm)				Expert			
Class	11	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Δ	
Fine		0.5	1.0	1.5	2.0		
Medium	X	1.0	2.0	3.0	4.0	±3°	
Coarse		2.0	3.5	5.0	6.5		
Tapped Holes acc.							
11 Tolerance Class Applied Crossmarked							
Mass		Scale		Material No.		Date of first issue	
5.11 kg		1:1		400 851 508 0		053 EN 1/1	
Size		CAD System		EDM-No.		Revision	
A 1		CREO		508198		6 A	
						Tech. Resp.	
						5496_JMW	
						Replacement for	