
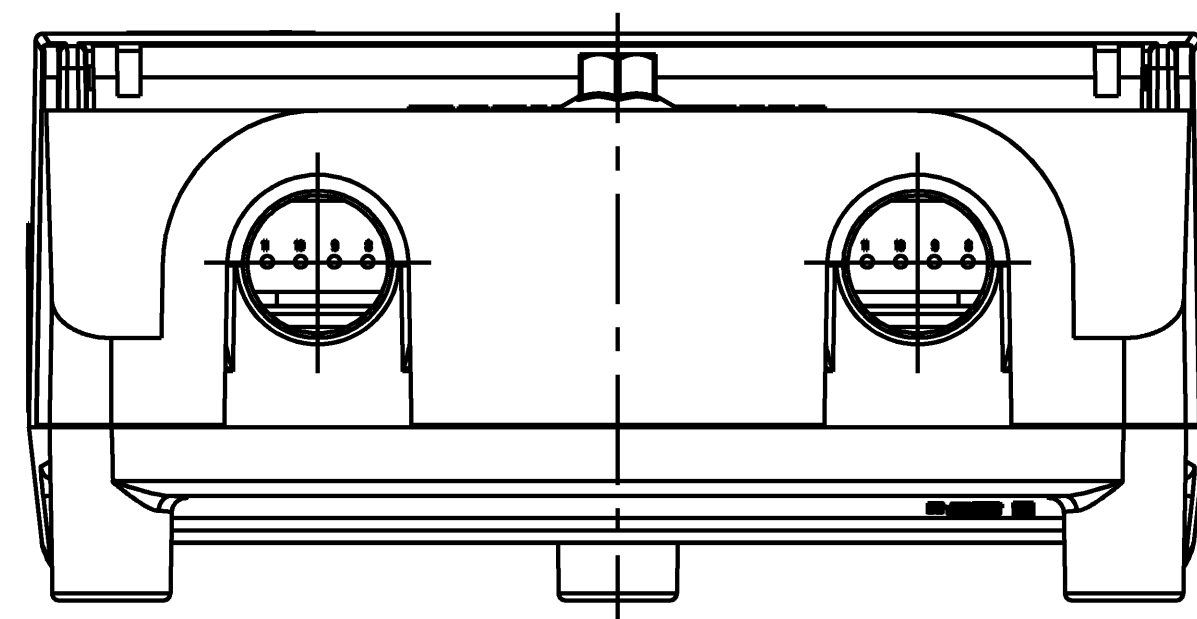
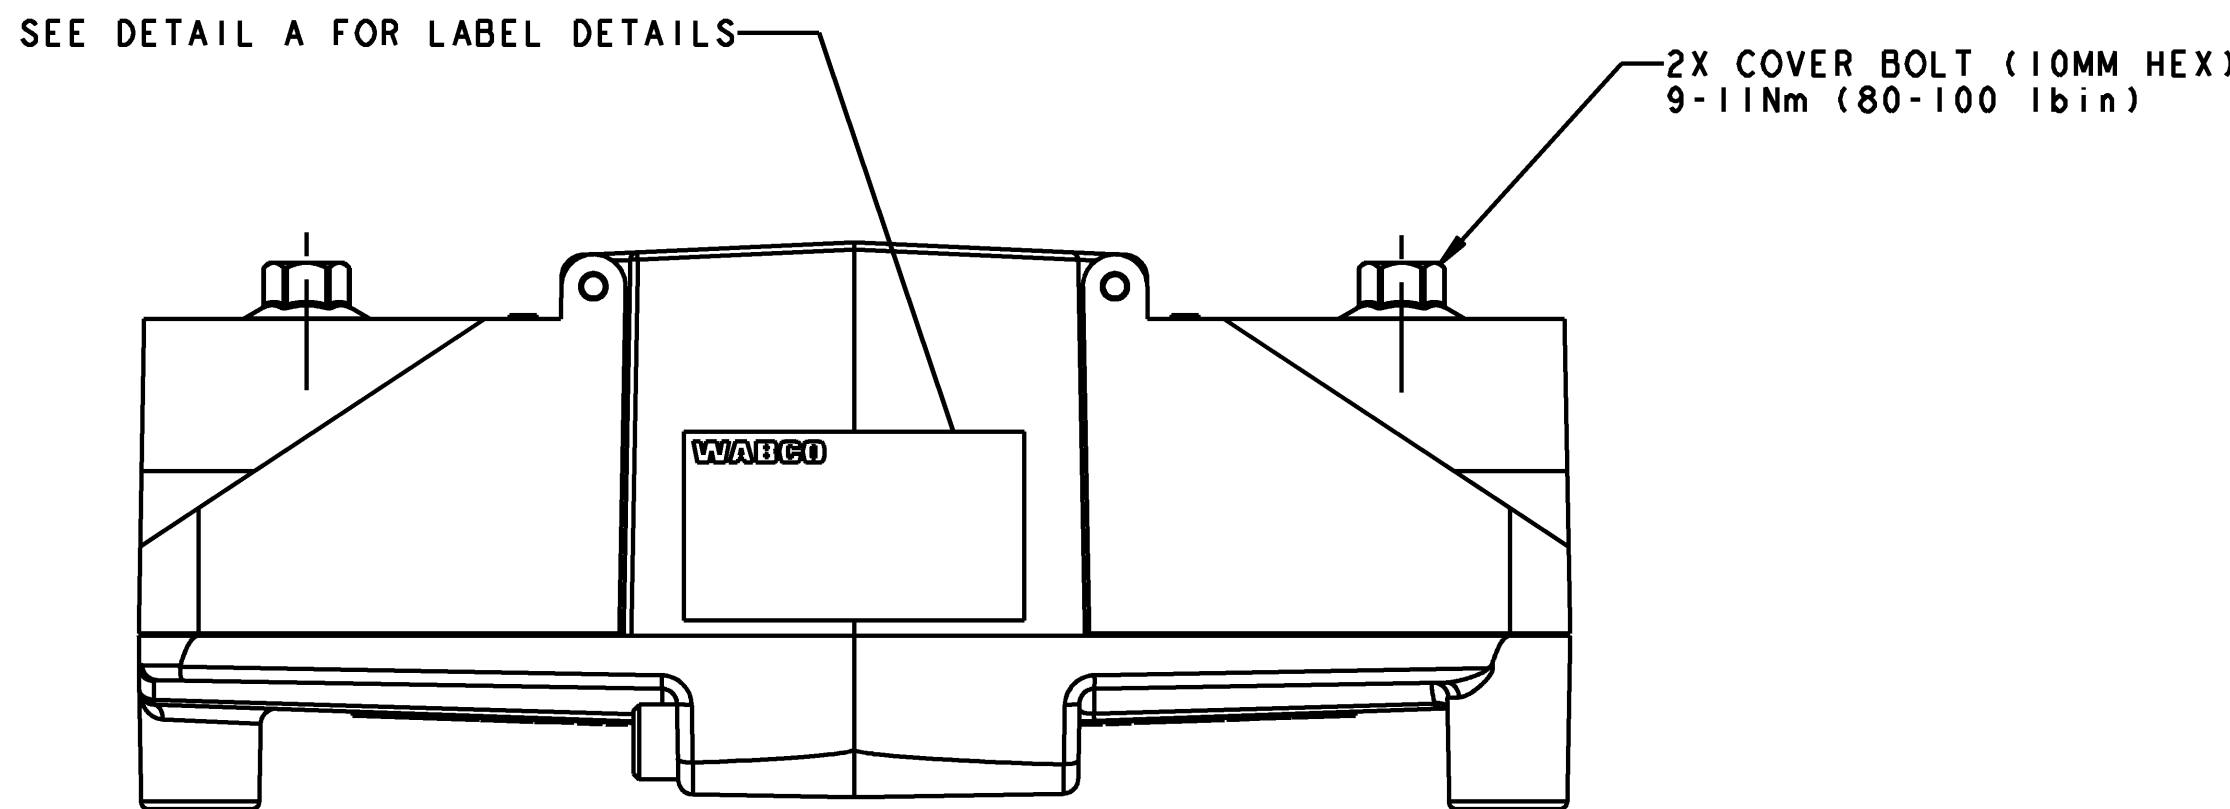
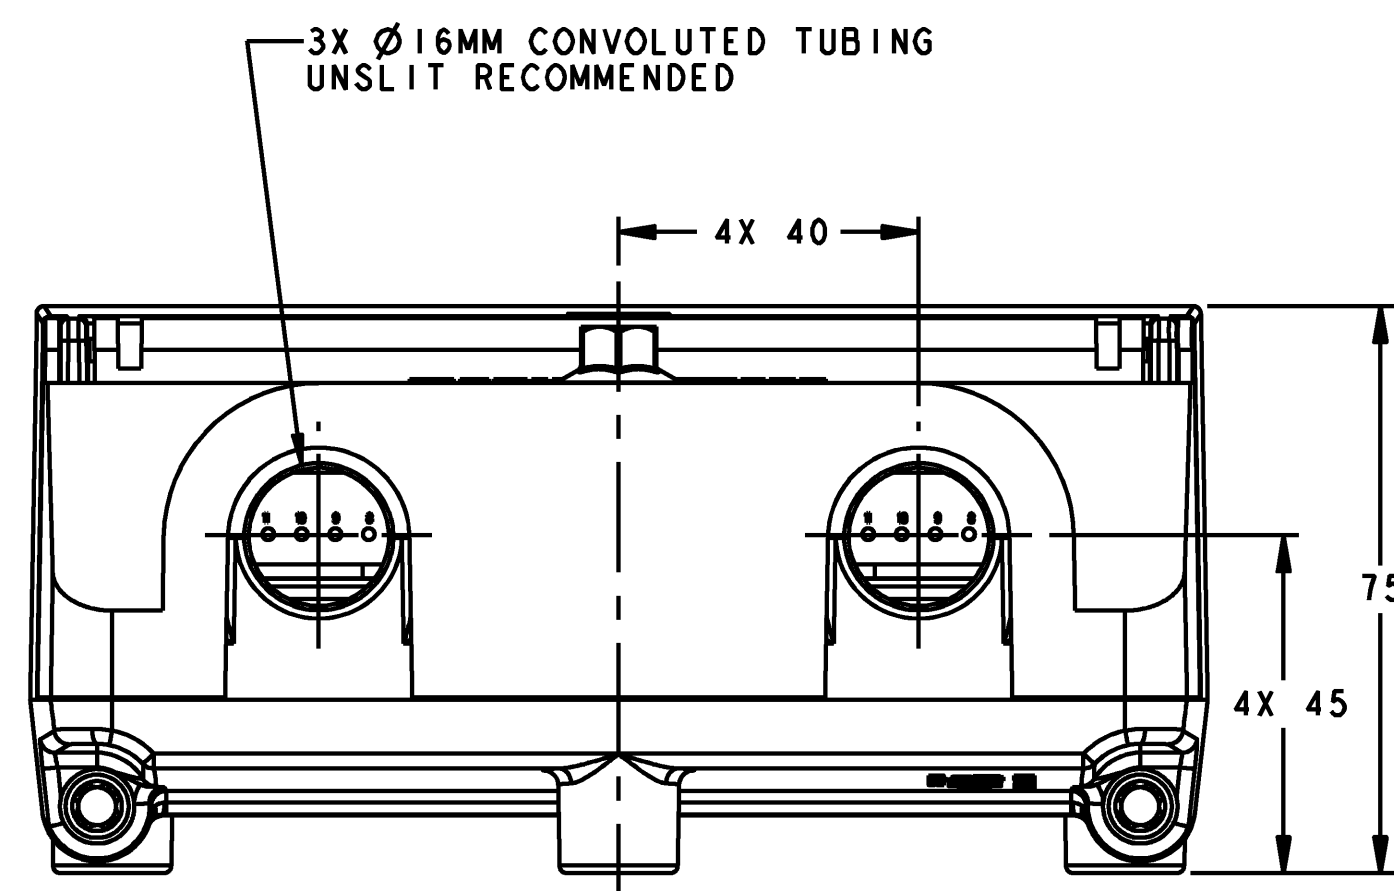
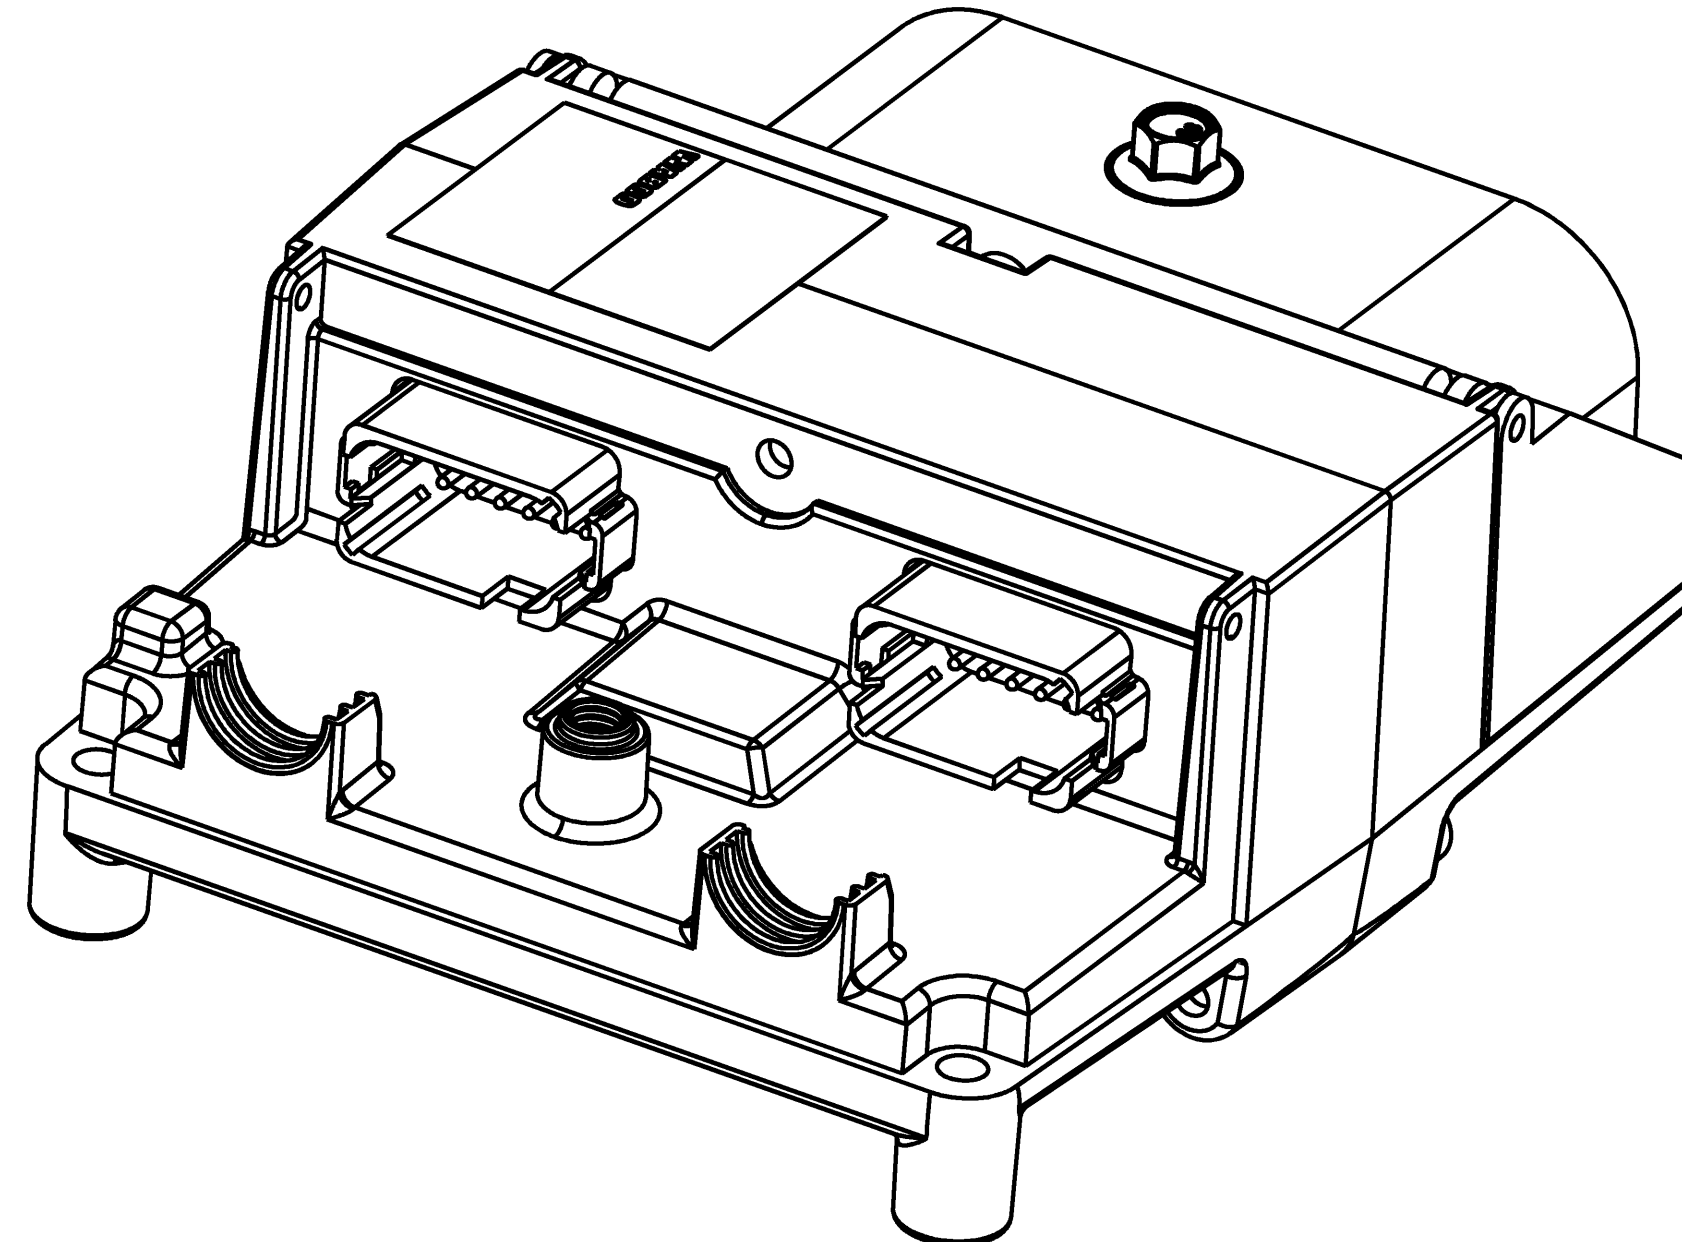
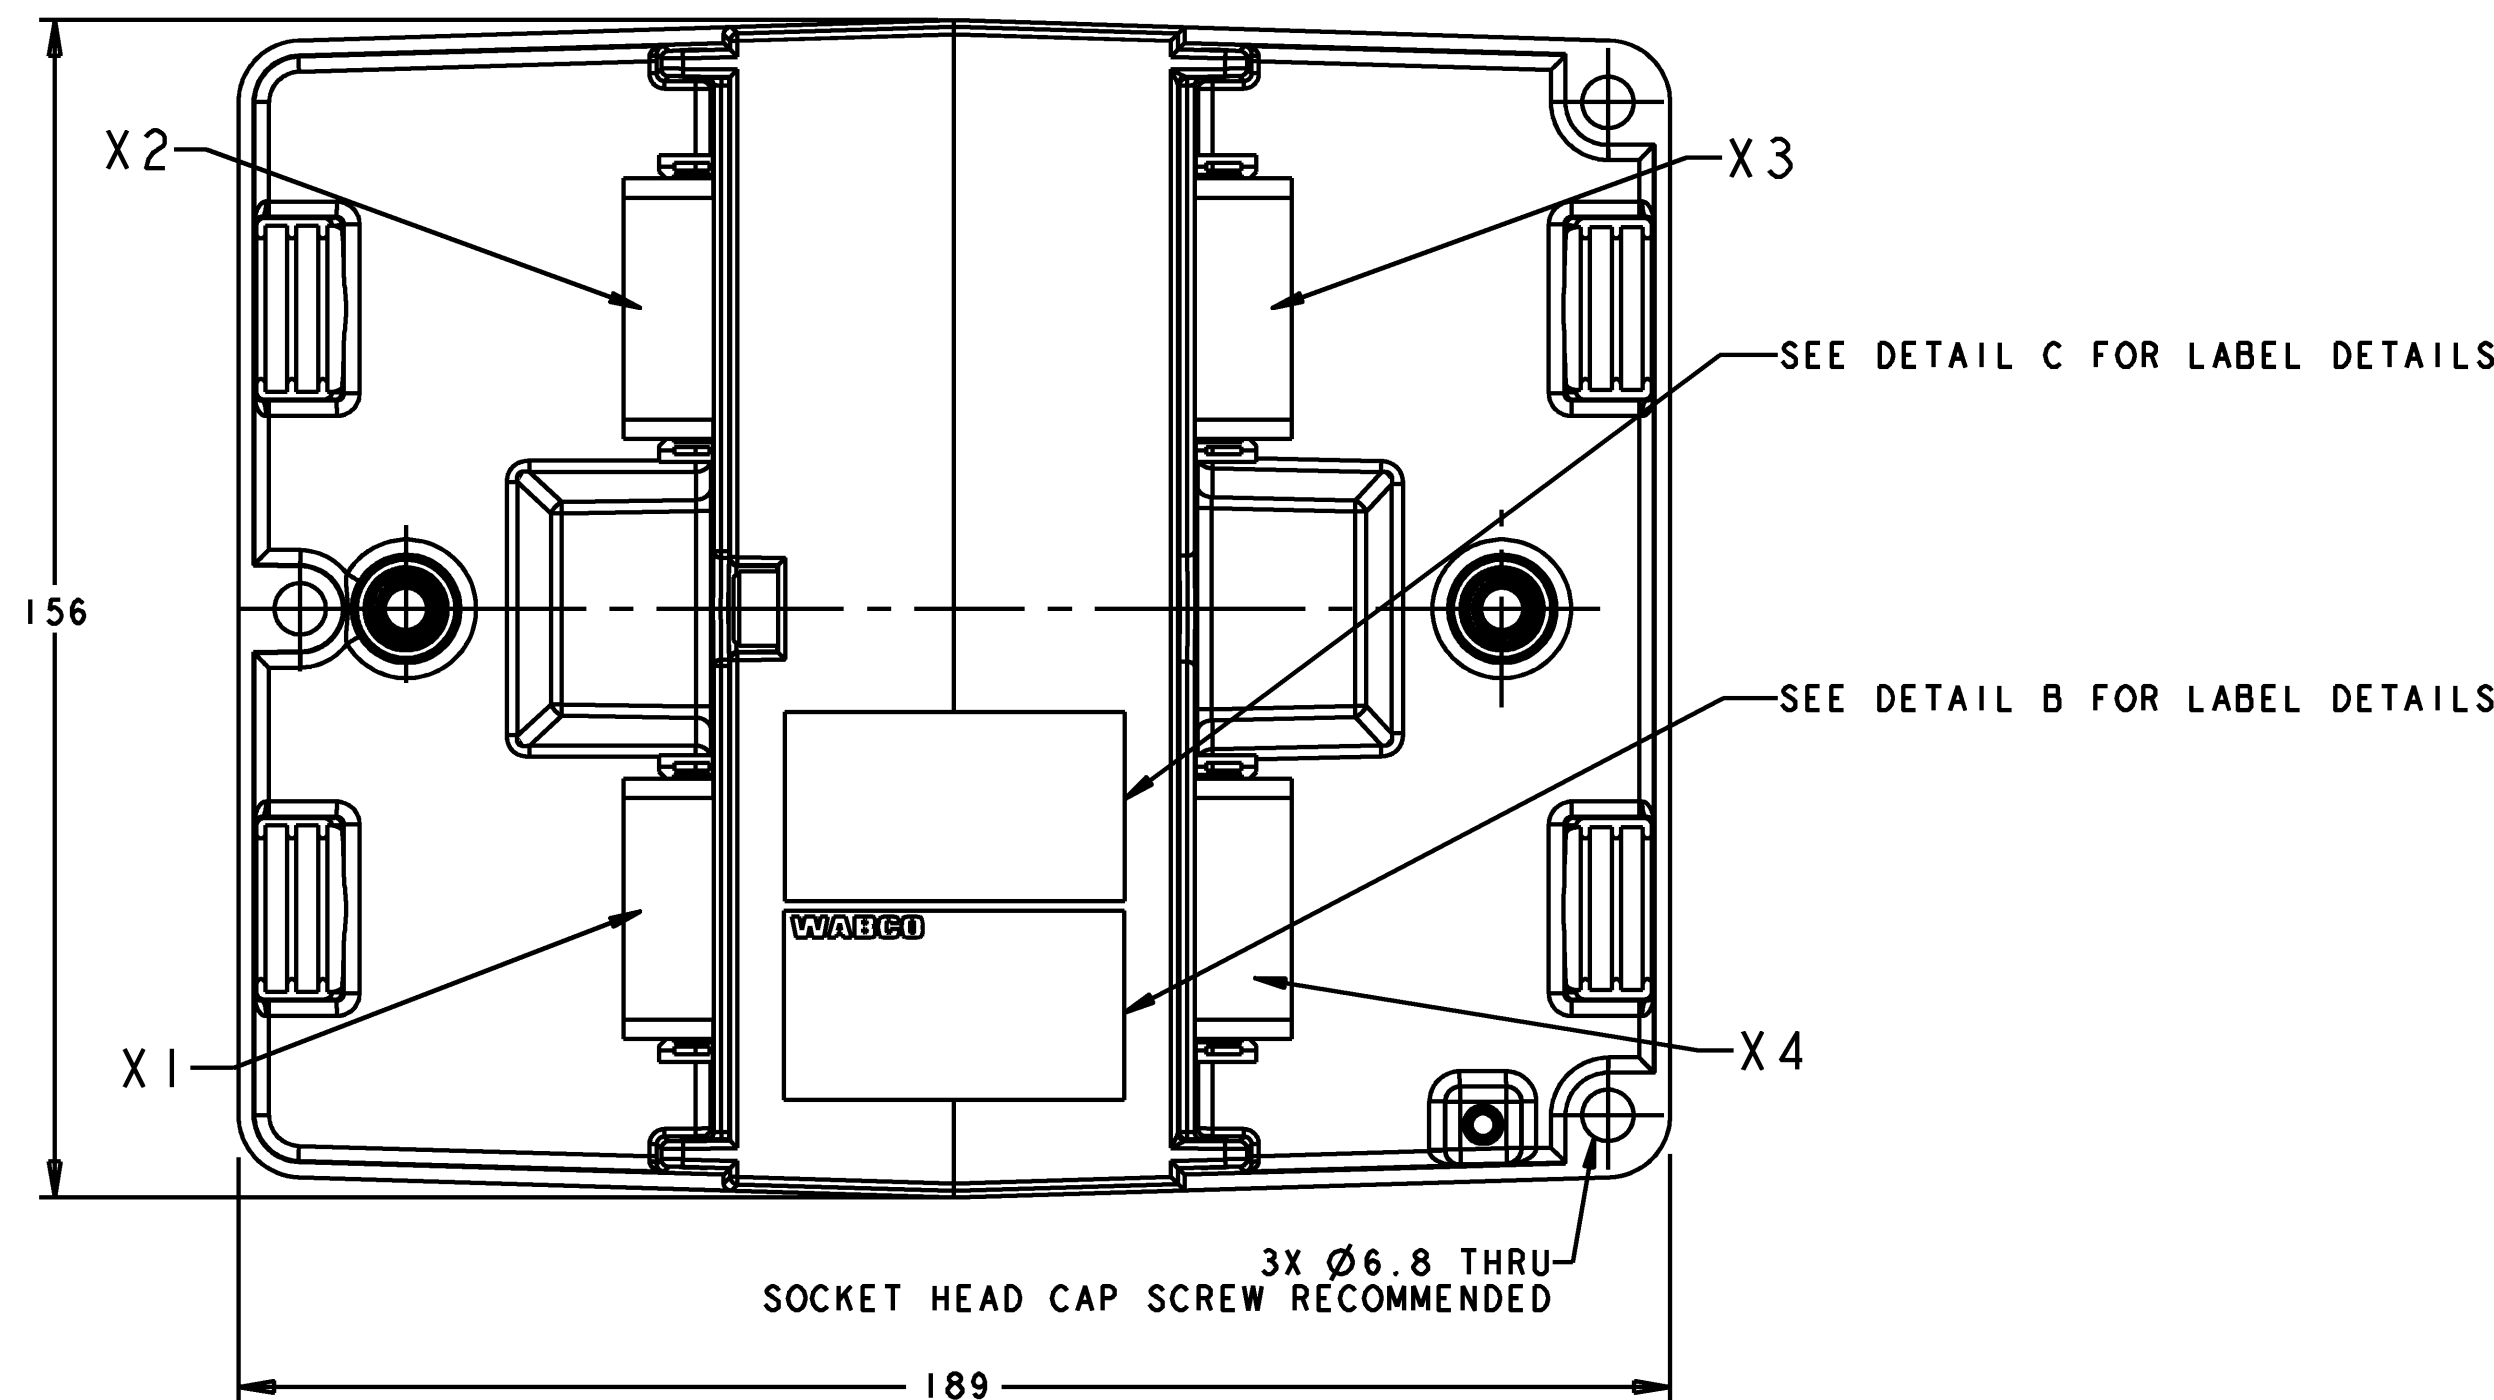


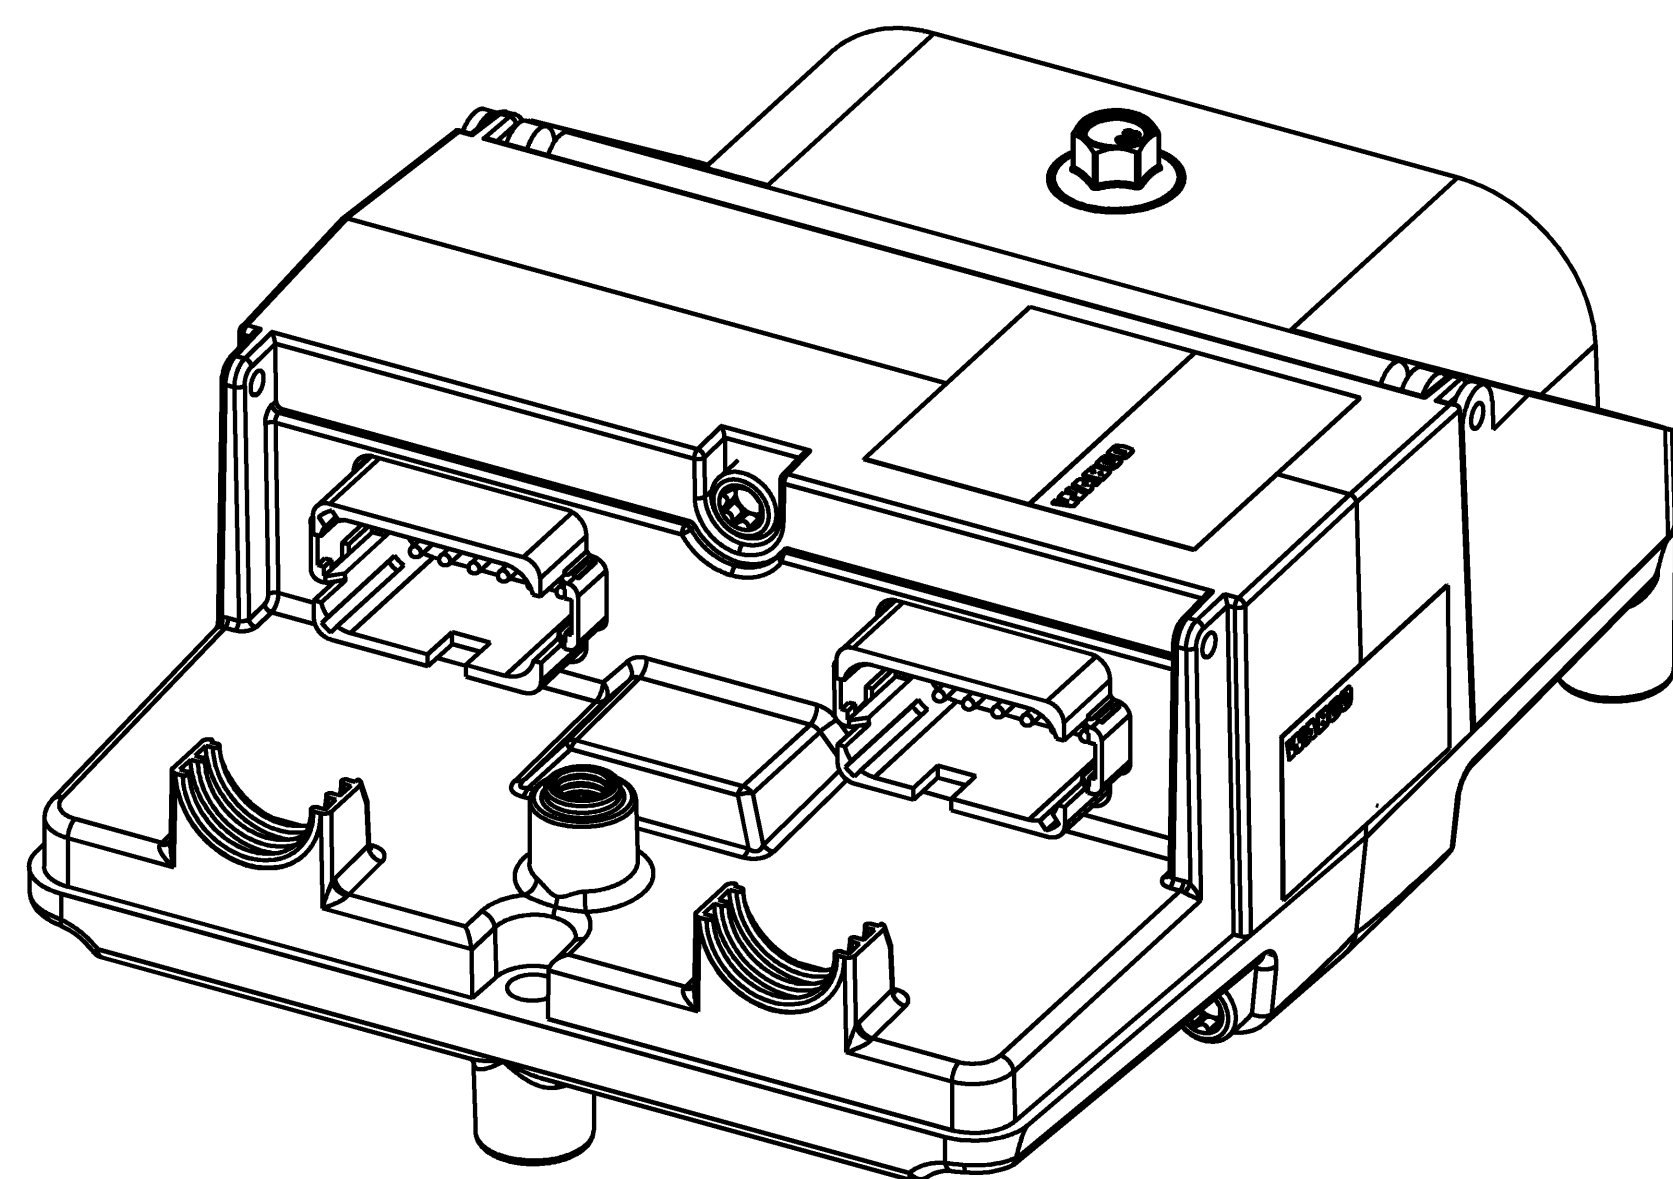


ITEM	CONNECTOR X2 FRONT
1	NOT USED
2	LEFT FRONT ABS VALVE INLET
3	RIGHT FRONT ABS VALVE OUTLET
4	RIGHT FRONT ABS VALVE INLET
5	RIGHT FRONT SENSOR
6	RIGHT FRONT SENSOR
7	LEFT FRONT SENSOR
8	LEFT FRONT SENSOR
9	RIGHT FRONT ABS VALVE COMMON
10	LEFT FRONT ABS VALVE OUTLET
11	LEFT FRONT ABS VALVE COMMON
12	NOT USED
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SB-B016 (BLACK)	


ITEM	CONNECTOR X1 CAB
1	+12V IGNITION/BATTERY
2	+12V IGNITION
3	ATC LAMP/ATC SWITCH
4	J1587 AT(+)
5	RETARDER RELAY (CONTROL)
6	J1939 CAN-L
7	J1939 CAN-H
8	TRAILER WARNING LAMP
9	J1587 BK(-)
10	BLINKCODE SWITCH/ABS LAMP CONTROL
11	GROUND
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SA-B016 (GRAY)	

ITEM	CONNECTOR X4 3RD AXLE
1	ABS SWITCH
2	NOT USED
3	THIRD AXLE LEFT SENSOR
4	THIRD AXLE LEFT SENSOR
5	THIRD AXLE RIGHT SENSOR
6	THIRD AXLE RIGHT SENSOR
7	THIRD AXLE RIGHT ABS VALVE OUTLET
8	THIRD AXLE RIGHT ABS VALVE COMMON
9	THIRD AXLE RIGHT ABS VALVE INLET
10	THIRD AXLE LEFT ABS VALVE OUTLET
11	THIRD AXLE LEFT ABS VALVE COMMON
12	THIRD AXLE LEFT ABS VALVE INLET
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SD-B016 (BROWN)	
***PINS 7 THRU 12 ONLY USED IN 6S6M APPLICATIONS	


ITEM	CONNECTOR X3 REAR
1	LEFT REAR SENSOR
2	LEFT REAR SENSOR
3	RIGHT REAR SENSOR
4	RIGHT REAR SENSOR
5	REAR AXLE 3/2 VALVE
6	REAR AXLE 3/2 VALVE GROUND
7	RIGHT REAR ABS VALVE OUTLET
8	RIGHT REAR ABS VALVE COMMON
9	RIGHT REAR ABS VALVE INLET
10	LEFT REAR ABS VALVE OUTLET
11	LEFT REAR ABS VALVE COMMON
12	LEFT REAR ABS VALVE INLET
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SC-B016 (GREEN)	

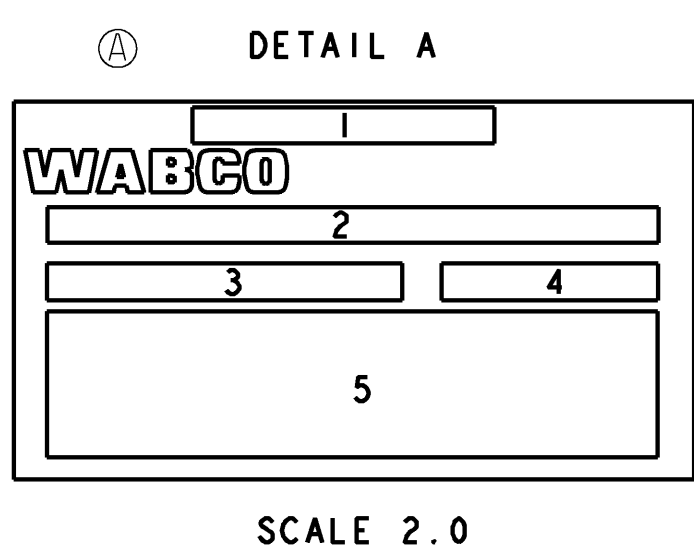


ITEM	DESCRIPTION
5	BAR CODE
4	SERIAL NUMBER
3	WABCO PART NUMBER
2	DESCRIPTION
1	COUNTRY OF ORIGIN
DETAIL A - LABEL FORMAT	

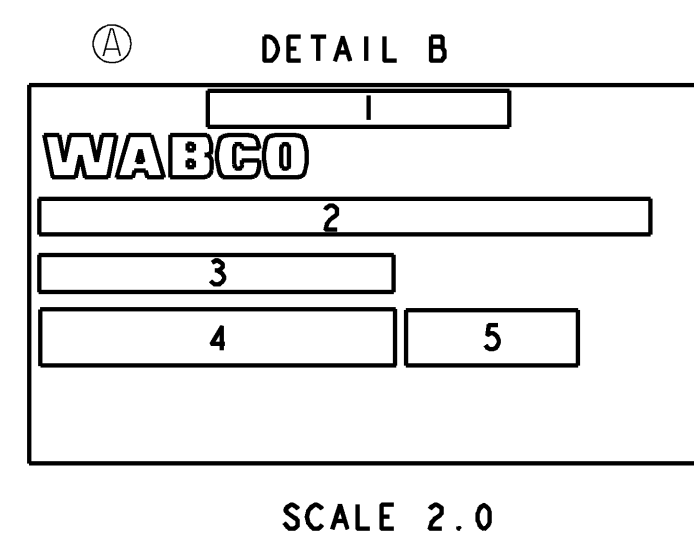

ITEM	DESCRIPTION
5	CUSTOMER PART NUMBER
4	DESCRIPTION
3	WABCO PART NUMBER
2	DESCRIPTION
1	COUNTRY OF ORIGIN
DETAIL B - LABEL FORMAT	

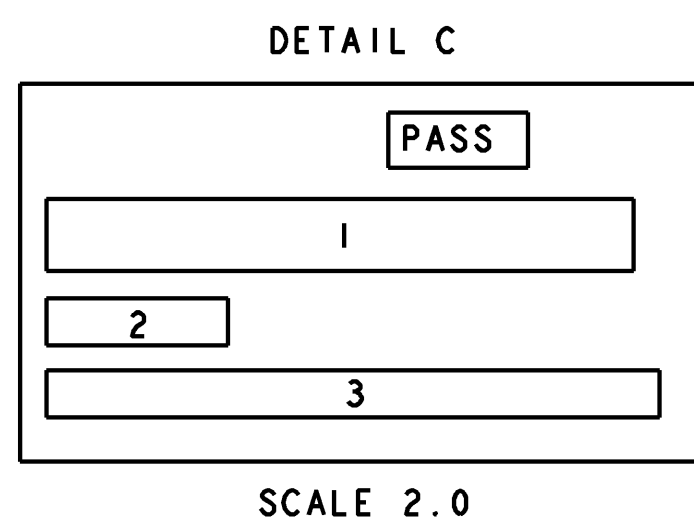

ITEM	DESCRIPTION
3	DATE AND TIME
2	SERIAL NUMBER
1	WABCO PART NUMBER
DETAIL C - LABEL FORMAT	

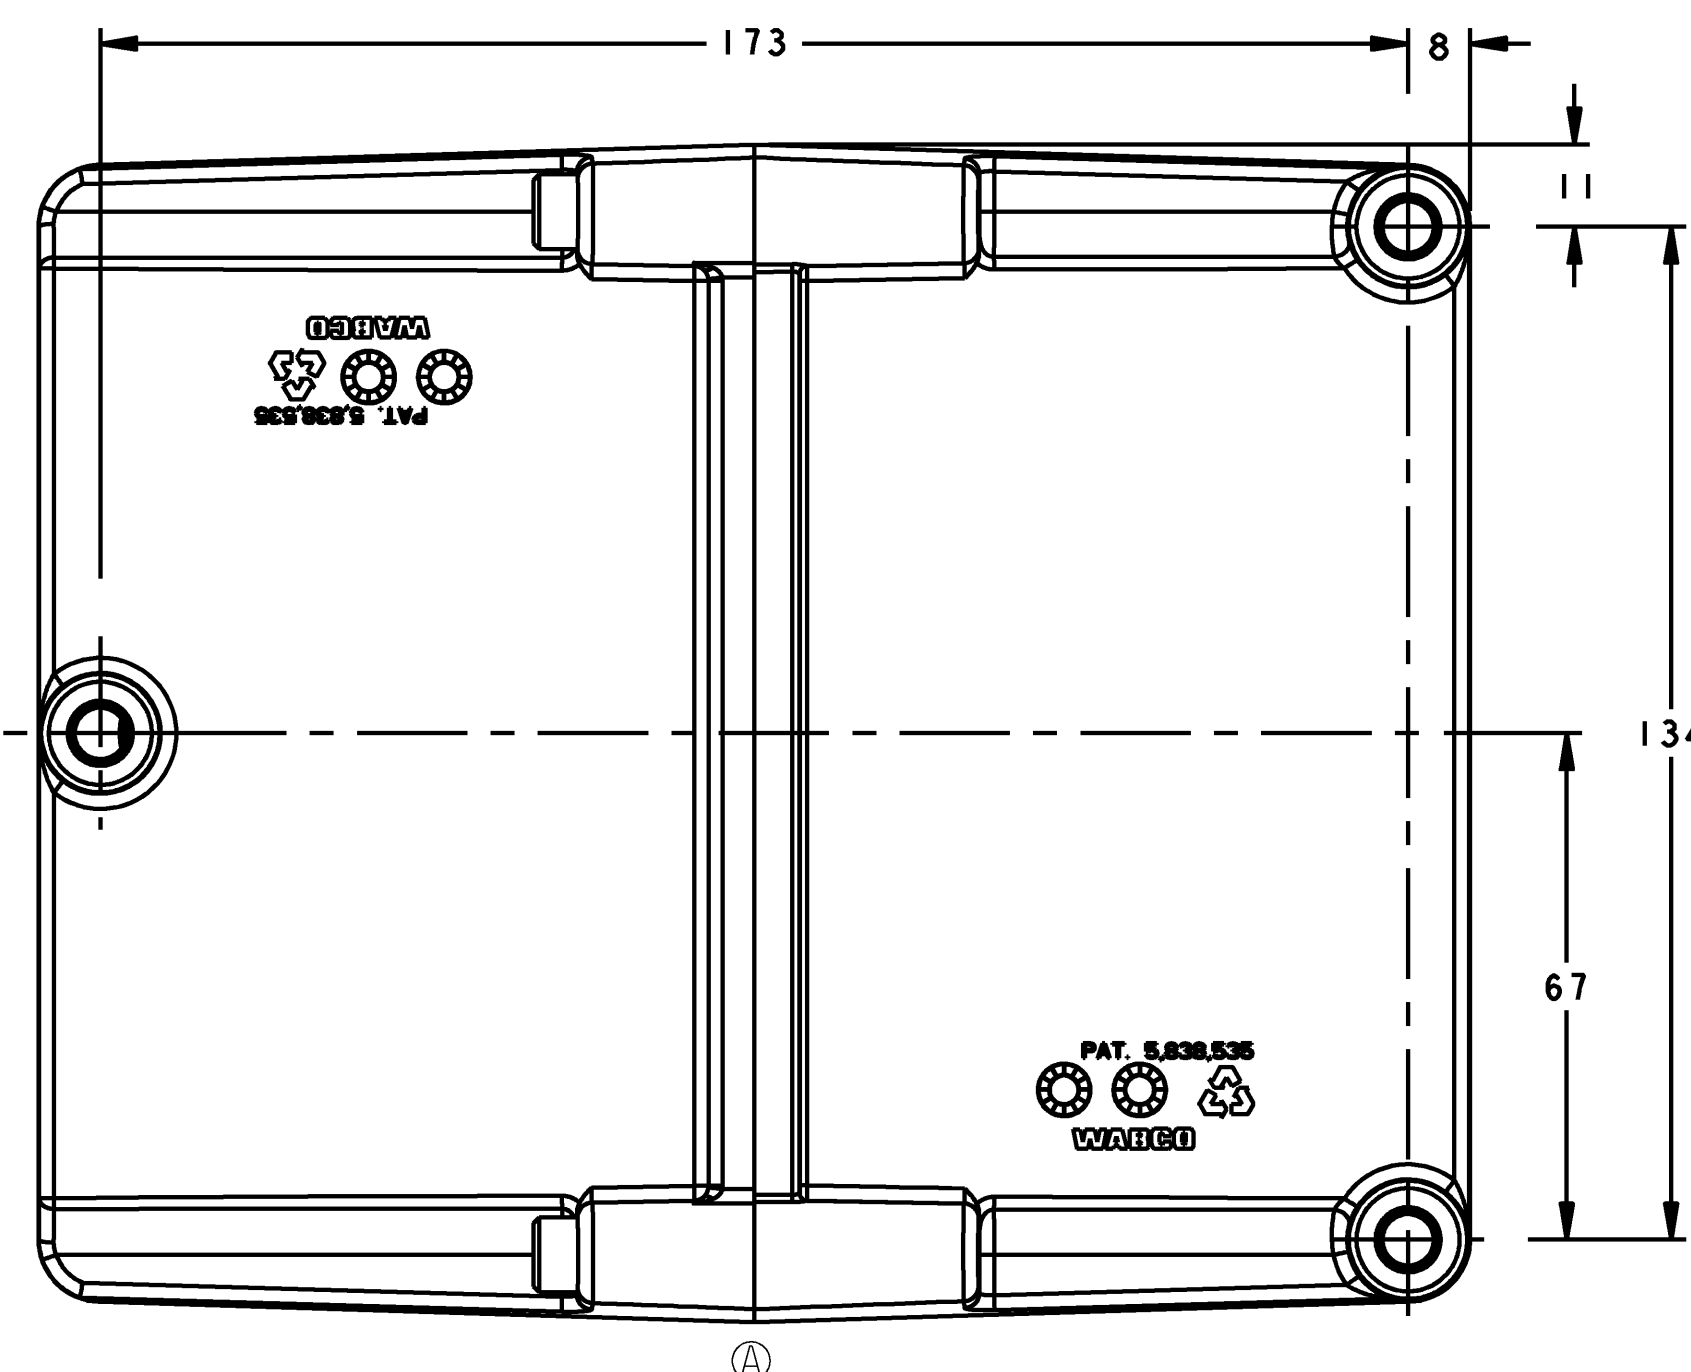

- NOTES:
- VOLTAGE: 12V $\pm 25\%$
 - THERMAL RANGE OF APPLICATION: -40 TO $+75^{\circ}\text{C}$
 - STORAGE TEMPERATURE: -40 TO $+90^{\circ}\text{C}$
 - SOME VIEWS SHOWN WITHOUT COVER ASSEMBLIES FOR CLARITY
 - SOFTWARE VERSION: E48
 - REFER TO THE APPLICABLE 035 DOCUMENT FOR SPECIFIC ECU FUNCTIONS AND CUSTOMER INFORMATION.