
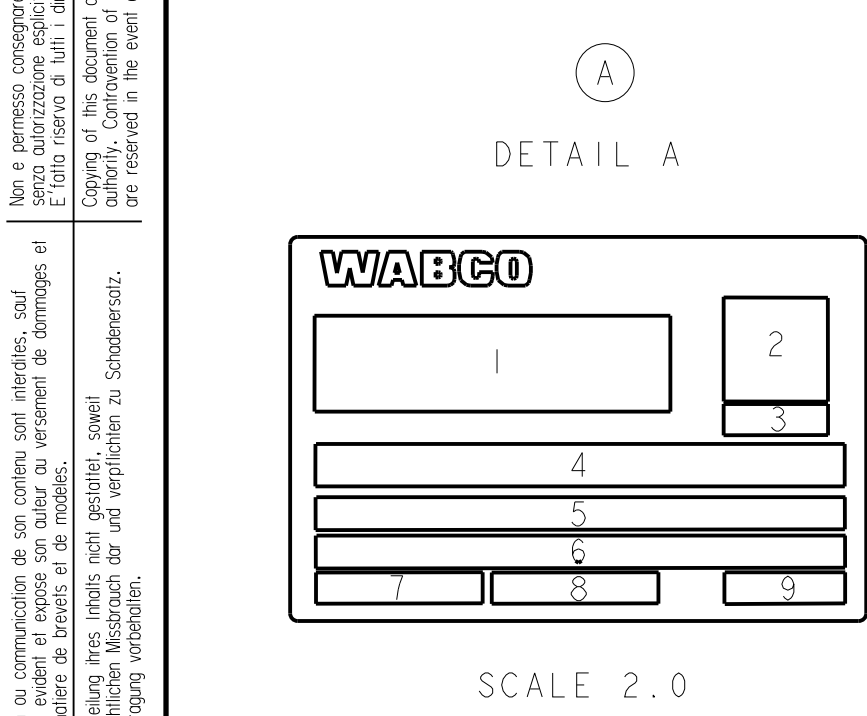



Non è permesso copiare o ristampare questo documento senza permesso scritto dalla WABCO. La WABCO si riserva il diritto di modificare senza preavviso i contenuti di questo documento. E' fatta riserva di tutti i diritti derivanti da brevetti o marchi. Coping of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express written permission of WABCO. All rights reserved. WABCO reserves all rights in this document. All rights reserved. Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

This communication or production is a technical drawing. It is not to be used for manufacturing or assembly without the written permission of WABCO. WABCO reserves all rights in this document. All rights reserved. This communication or production is a technical drawing. It is not to be used for manufacturing or assembly without the written permission of WABCO. WABCO reserves all rights in this document. All rights reserved. Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

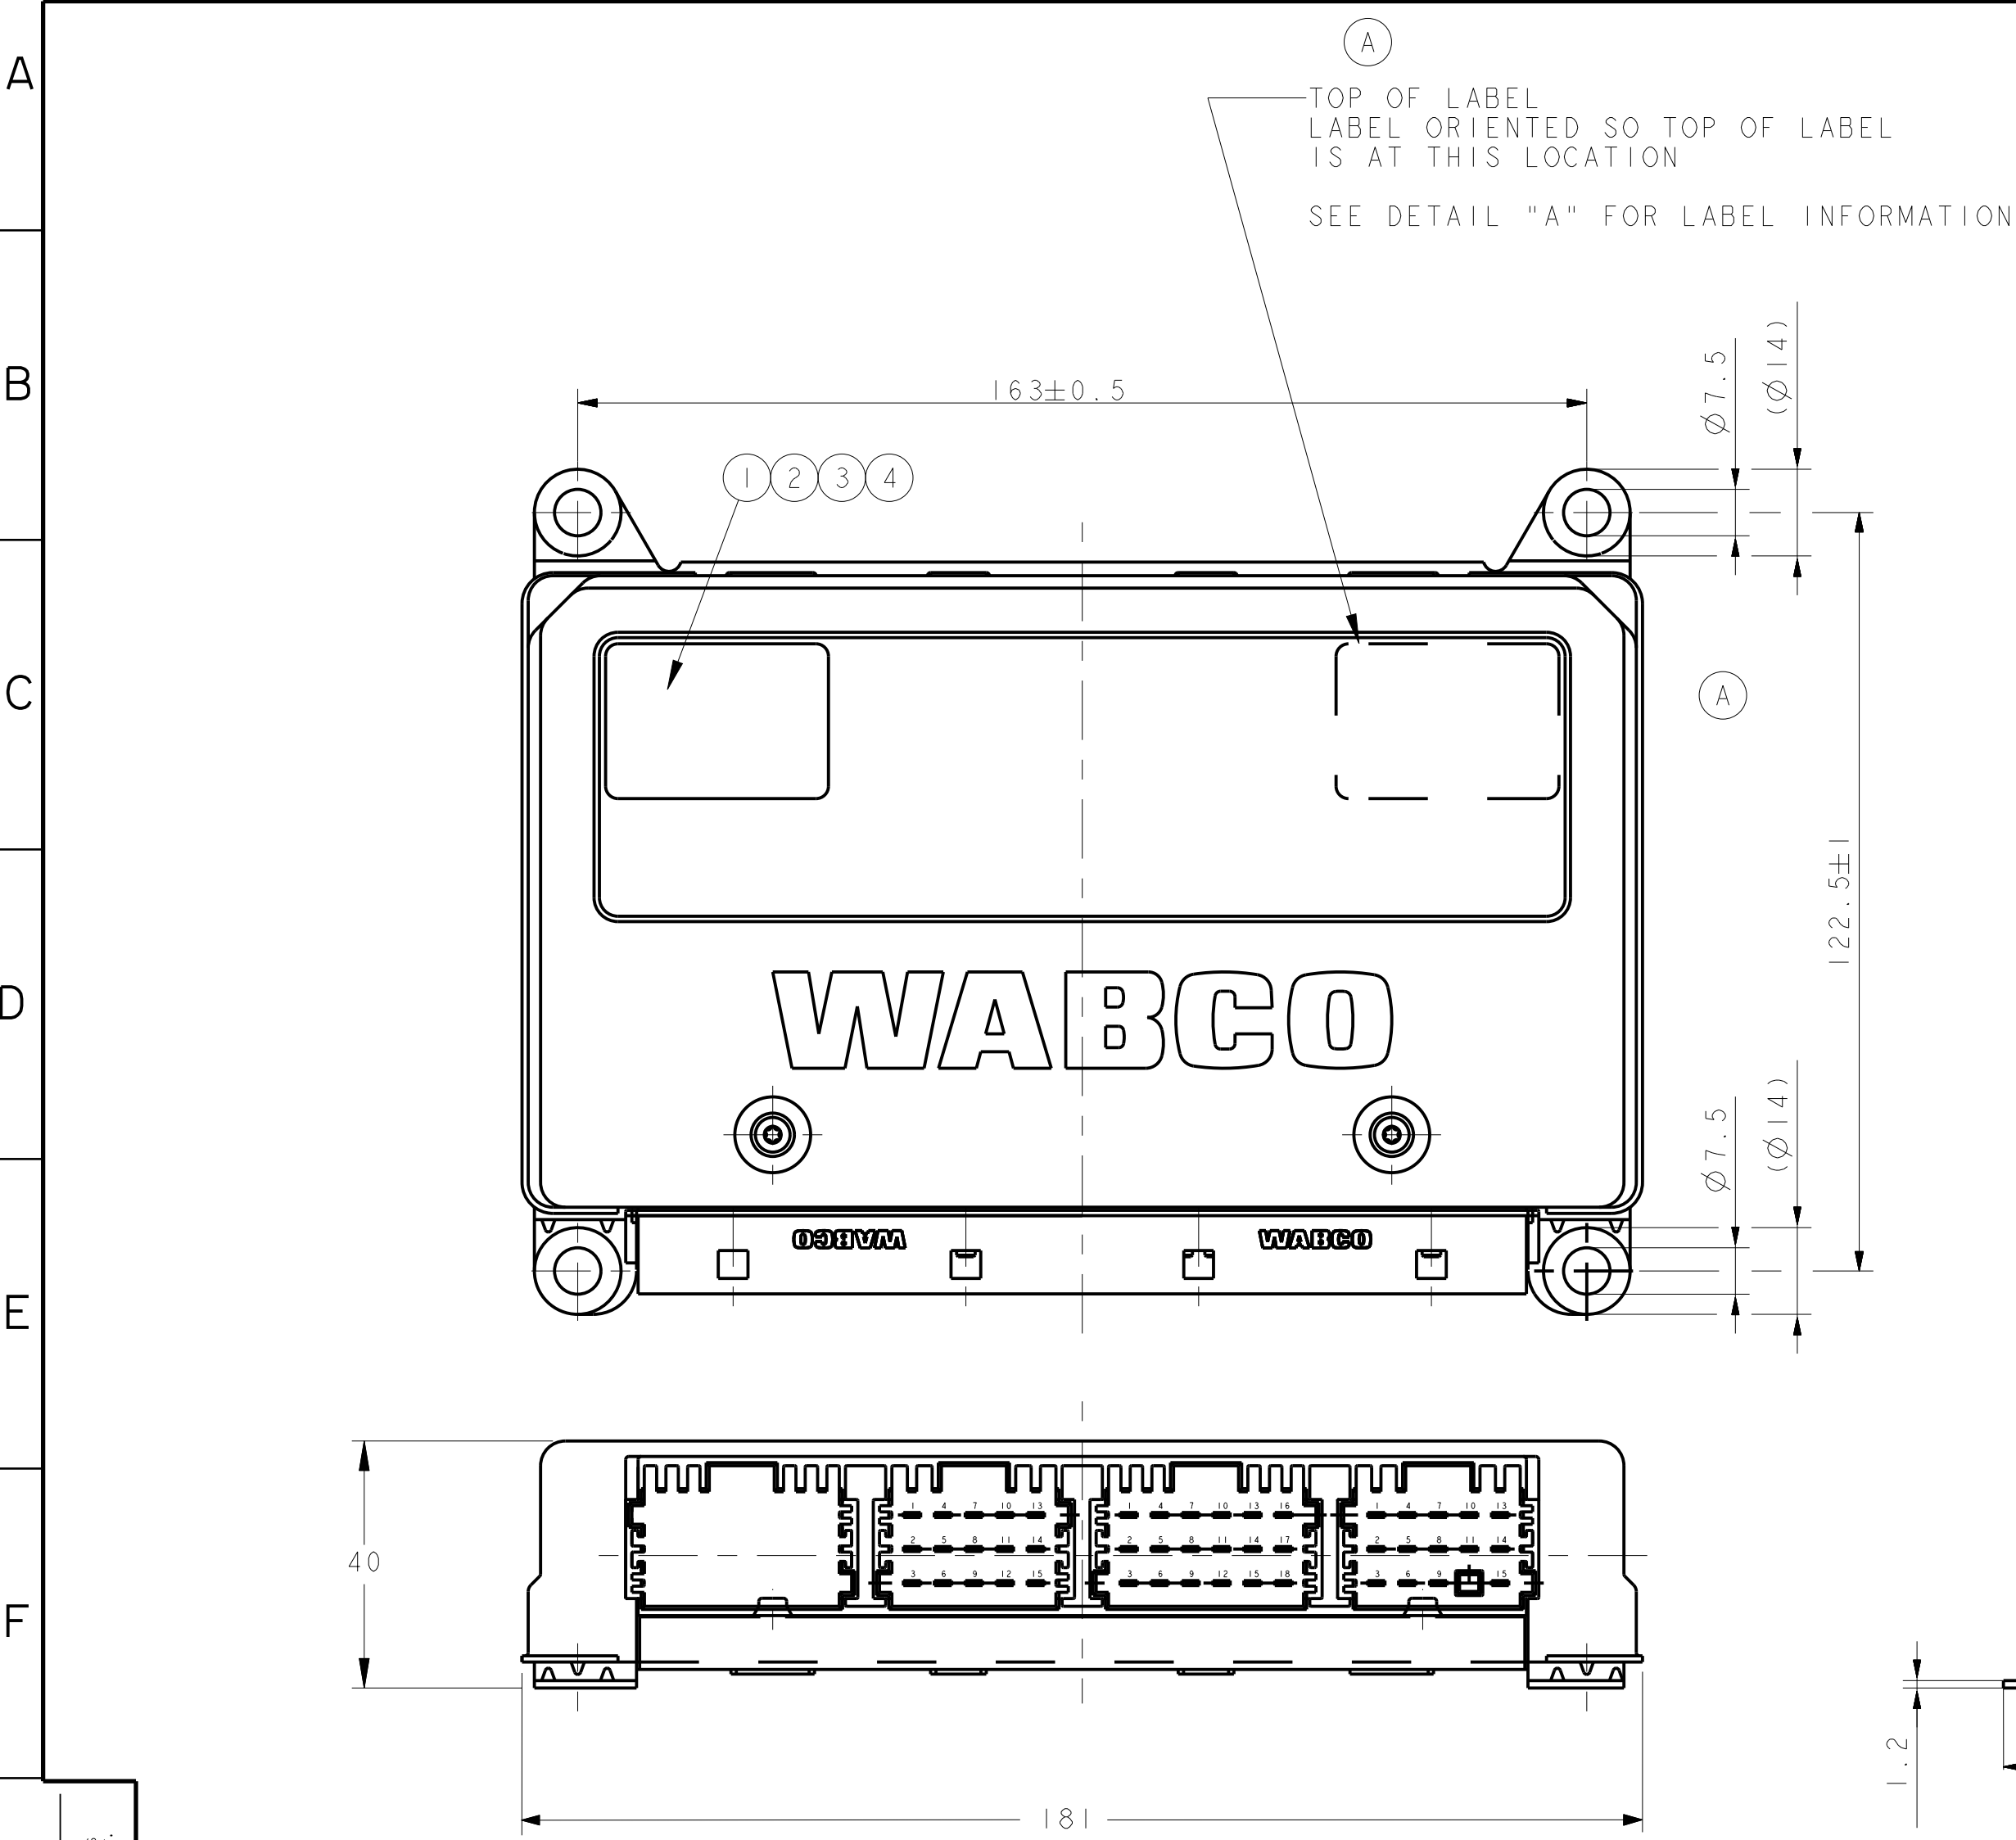

9	SERIAL NUMBER
8	
7	CUSTOMER PN
6	DESCRIPTION LINE 2
5	DESCRIPTION LINE 1
4	WABCO PART NUMBER
3	DATE CODE (WK/YR)
2	BAR CODE
1	
ITEM	DESCRIPTION

TABLE 2 - LABEL FORMAT

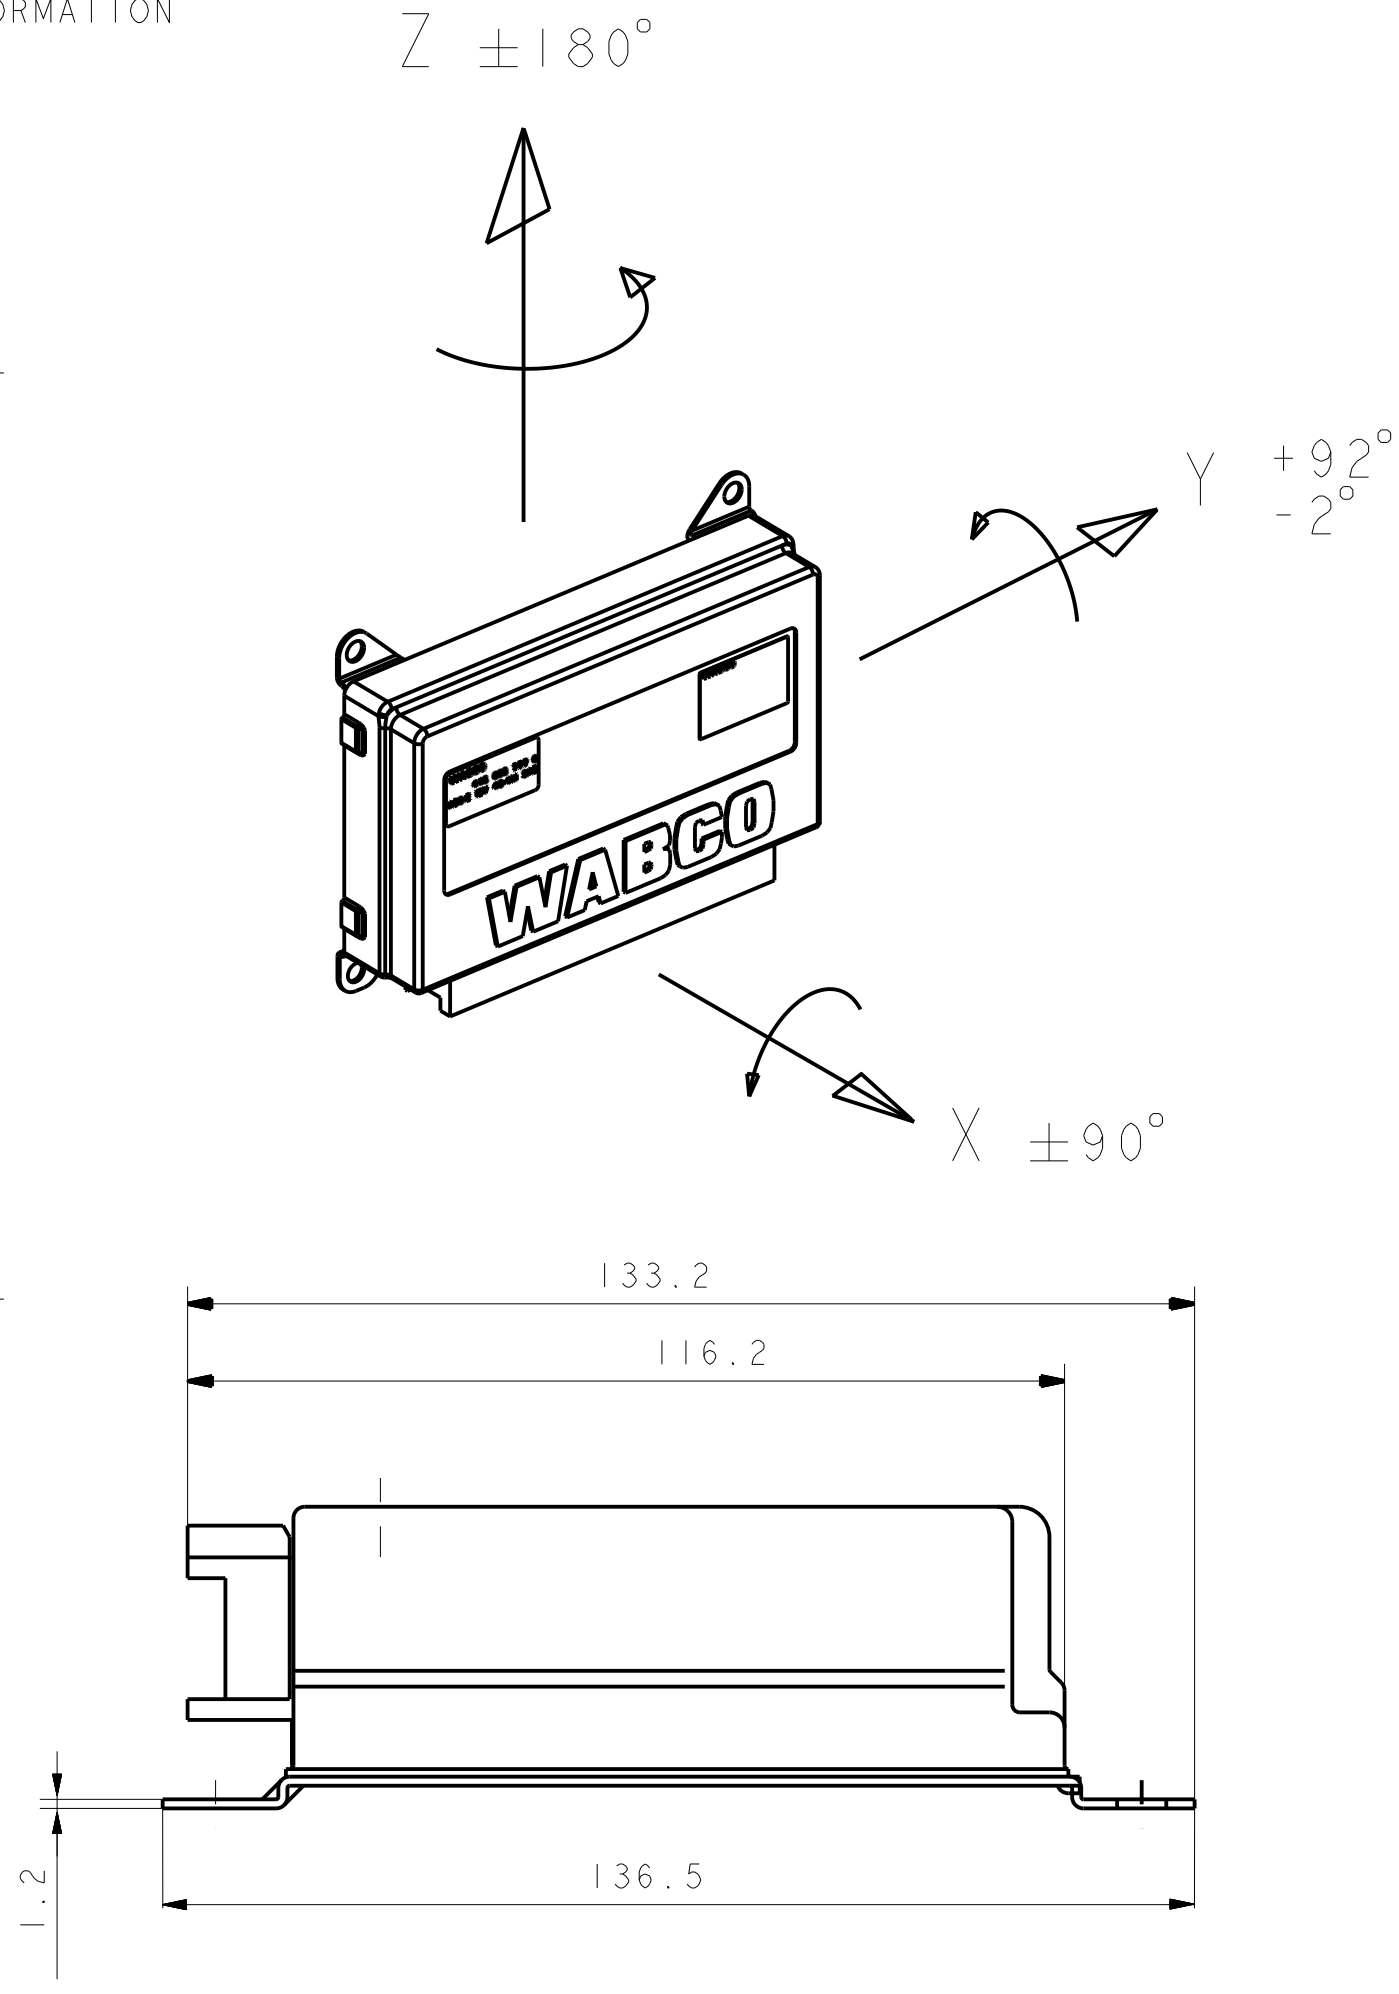

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION:
MESSERLEISTE: OBERFLAECHENSCHUTZ:
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE:
SPINE MULTIPA: PROTEZIONE SUPERFICIALE:

TINNED
VERZINNT
ETAME
STAGNATO

SERIAL NUMBER GREATER THAN:
FORTSCHRITZAHZL GROESSER ALS: 0
NUMERO DE SERIE PLUS GRAND QUE:
NUMERO DI SERIE PIU GRANDE:

DATE OF MANUFACTURE:
HERSTELLDATUM: JED-226
DATE DE FABRICATION:
DATA DI FABBRICAZIONE:

PRODUCTION PLACE:
PRODUKTIONSSTAETTE: JED-2
LIEU DE FABRICATION:
LUOGO DI FABBRICAZIONE:

COUNTRY OF ORIGIN:
URSPRUNGSLAND: JED-225
PAYS D'ORIGINE:
PAESE D'ORIGINE:

VOLTAGE:
SPANNUNG: 12V ±25% DC
VOLTAGE:
VOLTAGGIO:

PROTECT TYPE:
SCHUTZART: IP 30 (IEC 529)
MODE DE PROTECTION:
MODO DI PROTEZIONE:

THERMAL RANGE OF APPLICATION:
THERM. ANWENDUNGSBEREICH: -40°...+75°C
GAMME D' APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

STORING TEMPERATURE:
LAGERTEMPORATUR: -40°...+90°C
TEMPERATURE D' UTILISATION:
TEMPERATURA DI ESERCIZIO :

REFER TO THE APPLICABLE 035 DOCUMENT FOR SPECIFIC ECU FUNCTIONS AND CUSTOMER INFORMATION.

THIRD ANGLE PROJECTION

General Specification: JED-334-1, Size ISO 14405 LP				Copyright WABCO		WABCO		A	
Further Technical Data:				Date		Signature			
Doc. Code:		Sheet:		To		2019-05-07		Sutton	
General Tolerances JED-261				2019-05-08		Gutierrez		PABS ECU E4C 12V 6S6M ATC PLC	
Range of Nominal Dimensions (± mm)				Checked		Expert			
Class	1)	≤ 50	50 > 180	180 ≤ 400	400 > 630	630 > 1000	≥ 1000		
Fine		0.5	1.0	1.5	2.0	3.0	4.0		
Medium	X	1.0	2.0	3.0	4.0	6.0	8.0	±3°	
Coarse		2.0	3.5	5.0	6.5	10.0	15.0		
Tapped Holes acc. 0				Mass		Scale		Material No.	
1) Tolerance Class Applied Crossmarked				0.6 KG		1.0		400 864 560 0	
A 1				CREO		CAD System		Date of first issue: 005 EN 1/1	
				ECN No.		Revision		Techn. Resp.	
				501484		5 A		6300	
								Replacement for	