

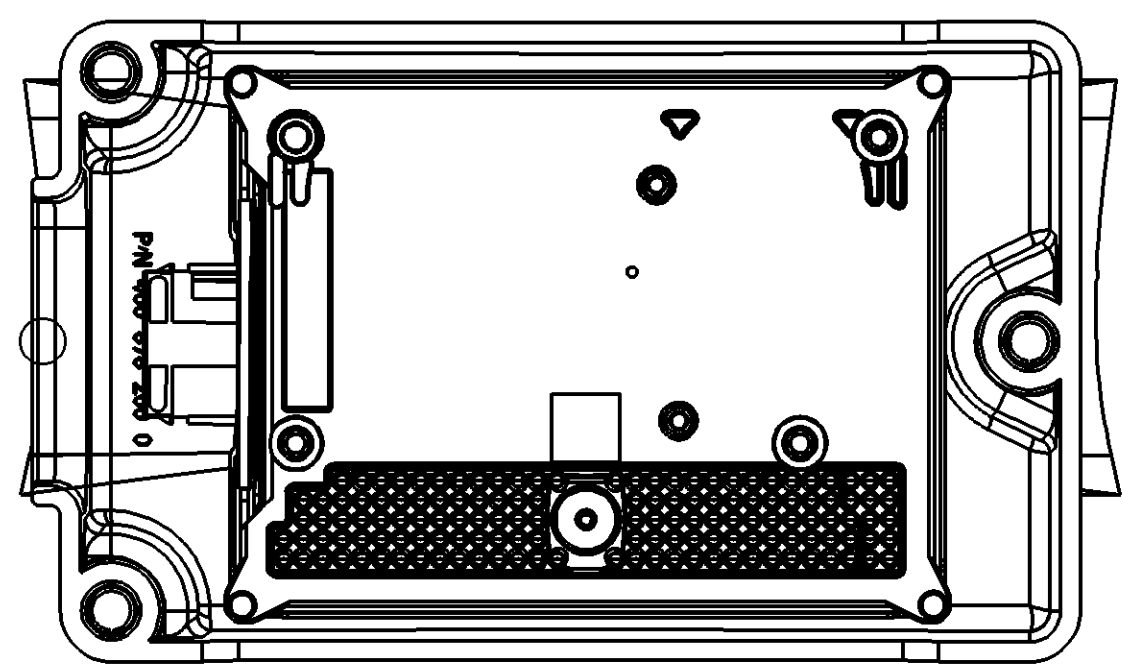



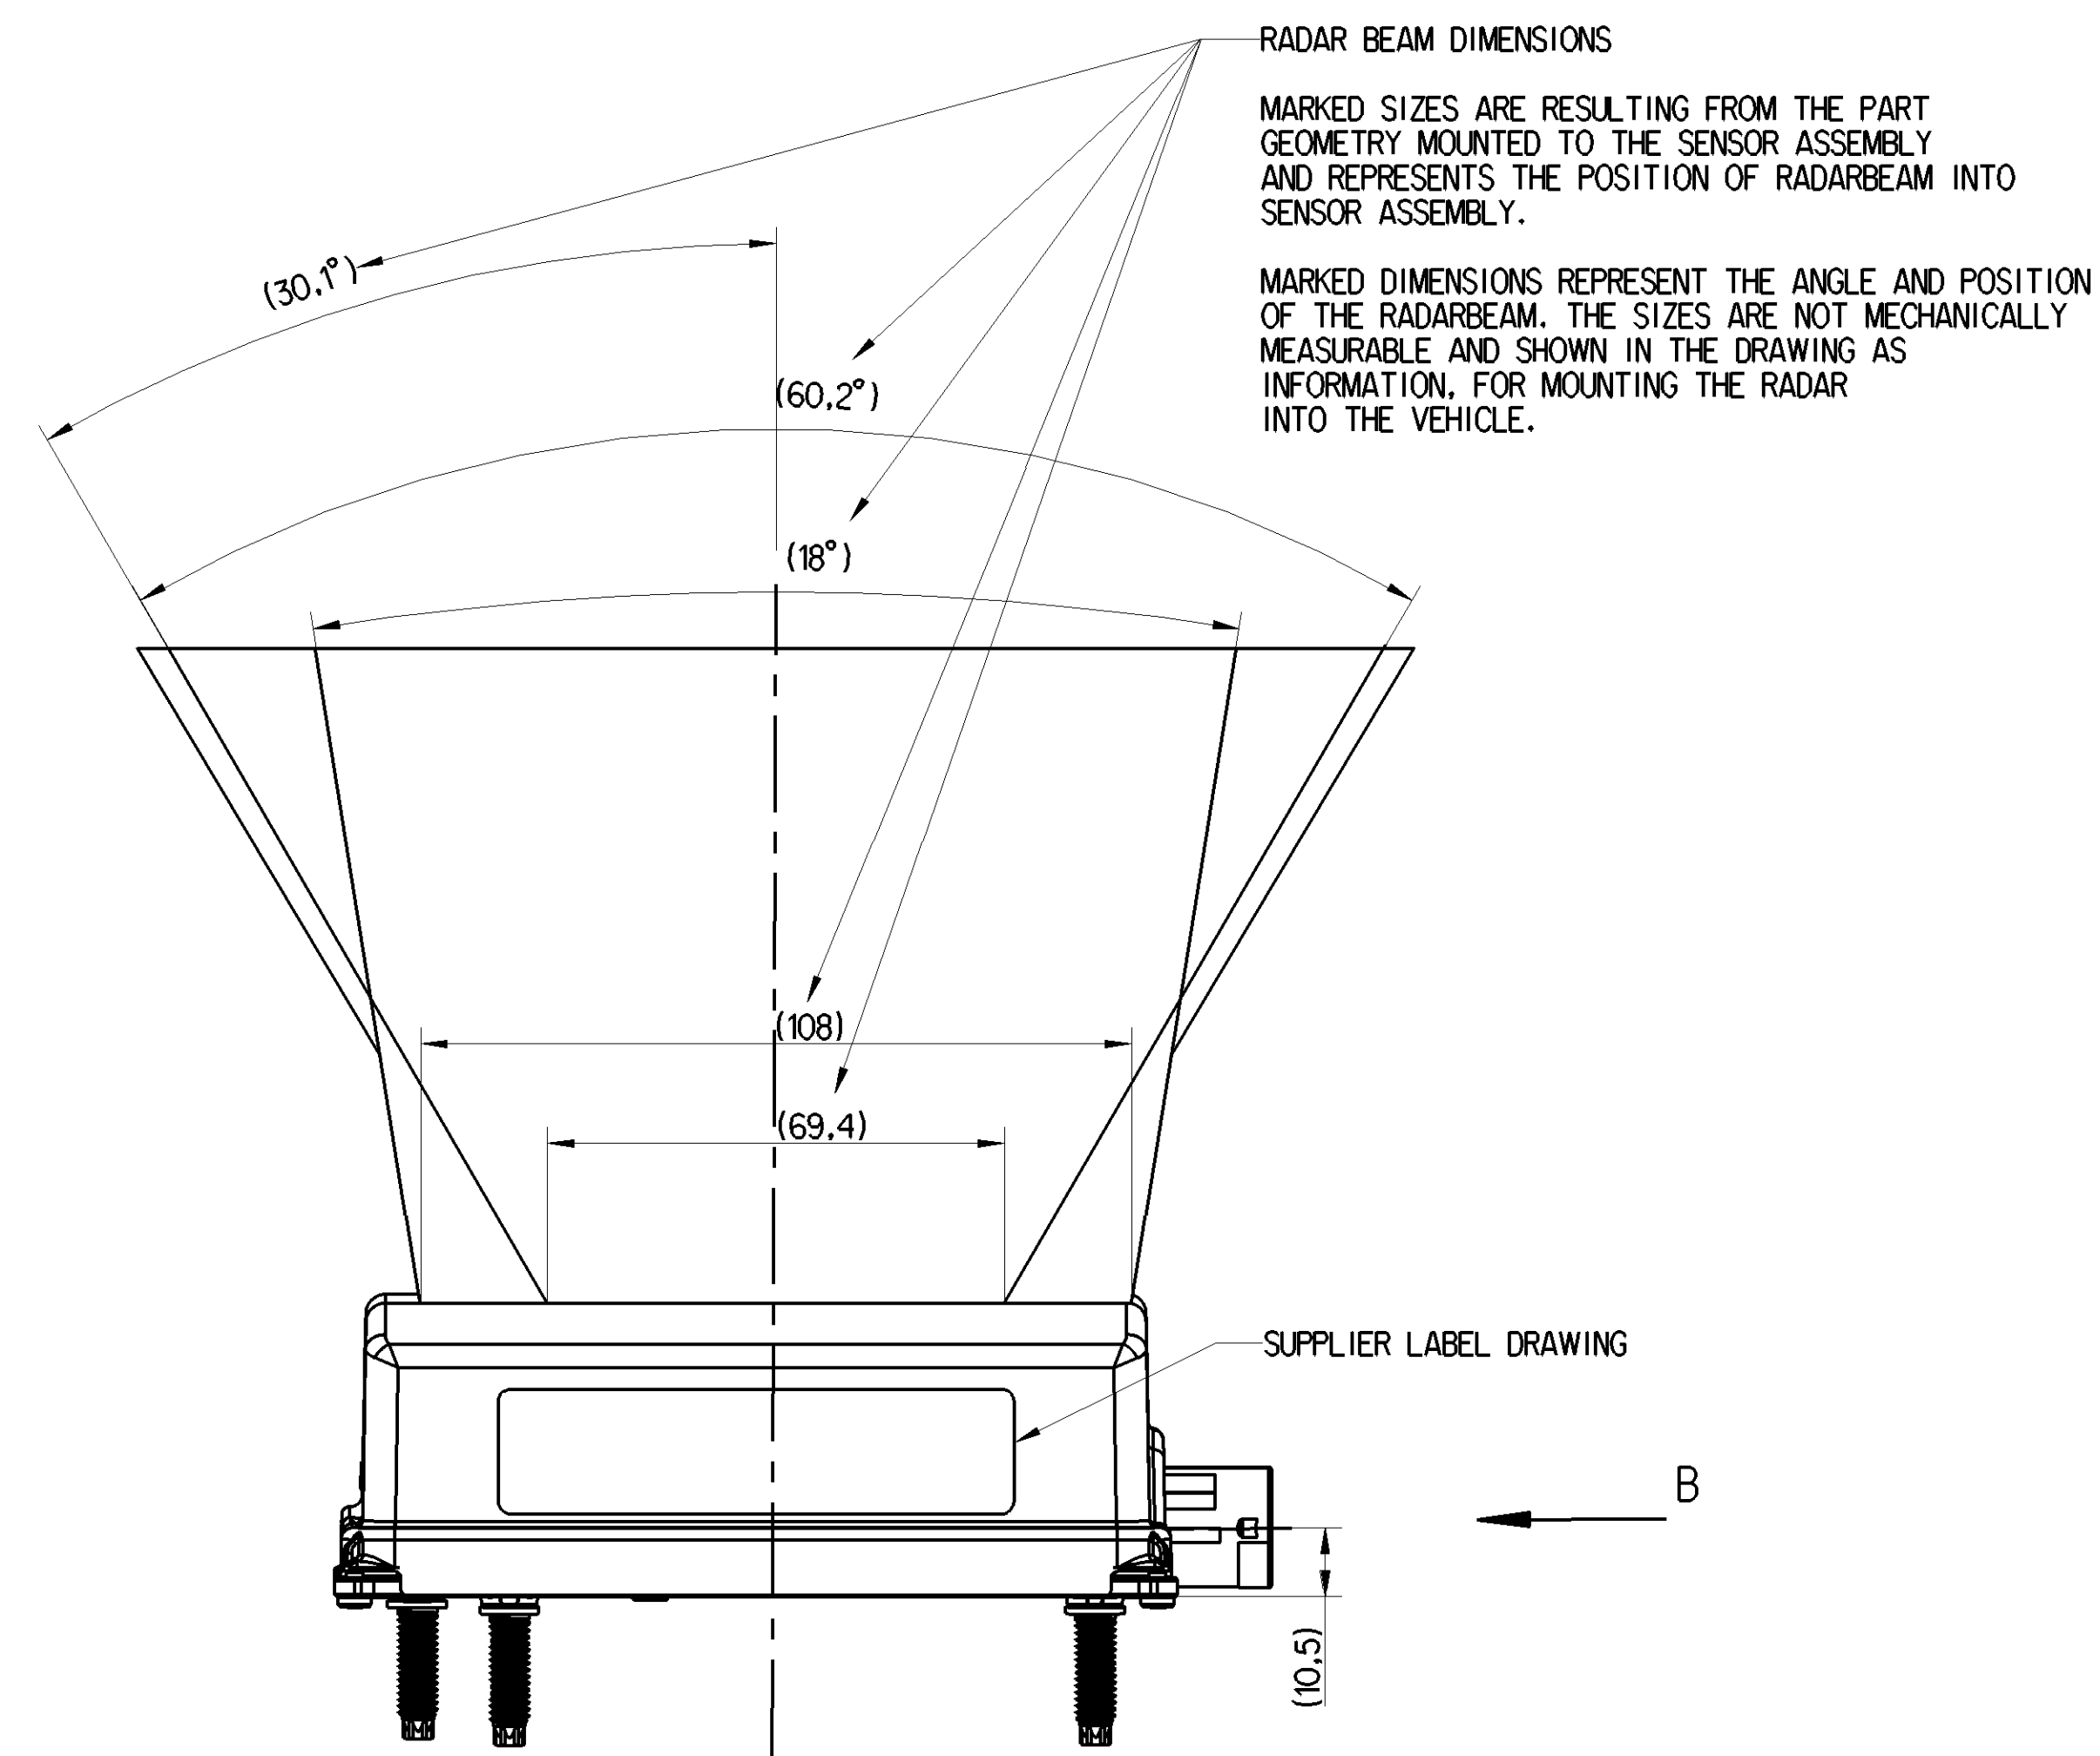


SCALE 1:1

REFER TO 400 878 200 0_006 FOR RADAR AND FASCIA POSITIONING.


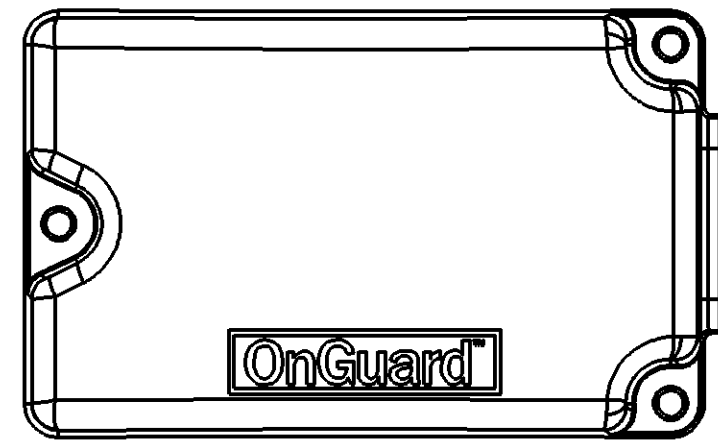


SCALE 1:1

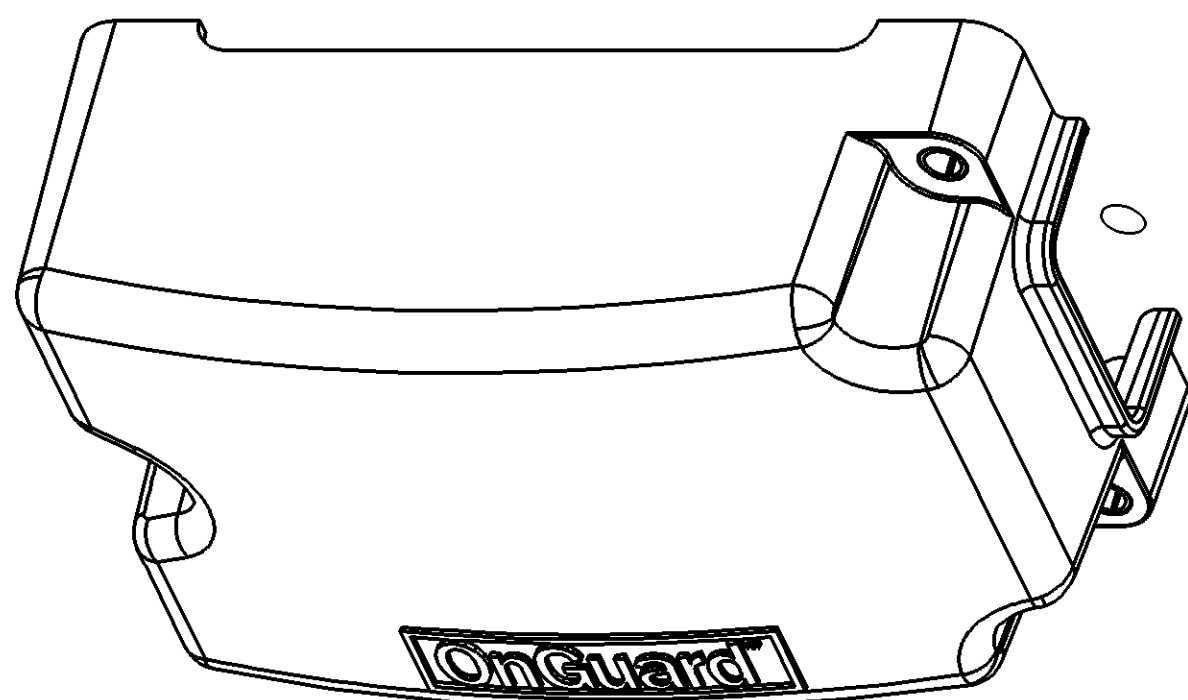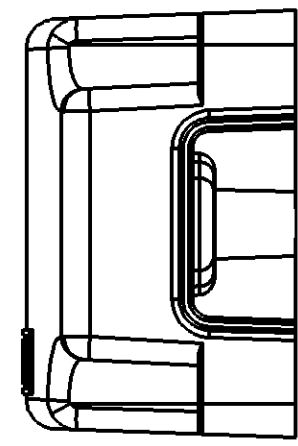


SCALE 1:1

400 878 200 0- RADAR FASCIA COVER-REQD
 FOR REFERENCE ONLY-NOT INCLUDED
 SEE 400 878 200 0 DOC 005 FOR FURTHER INFORMATION

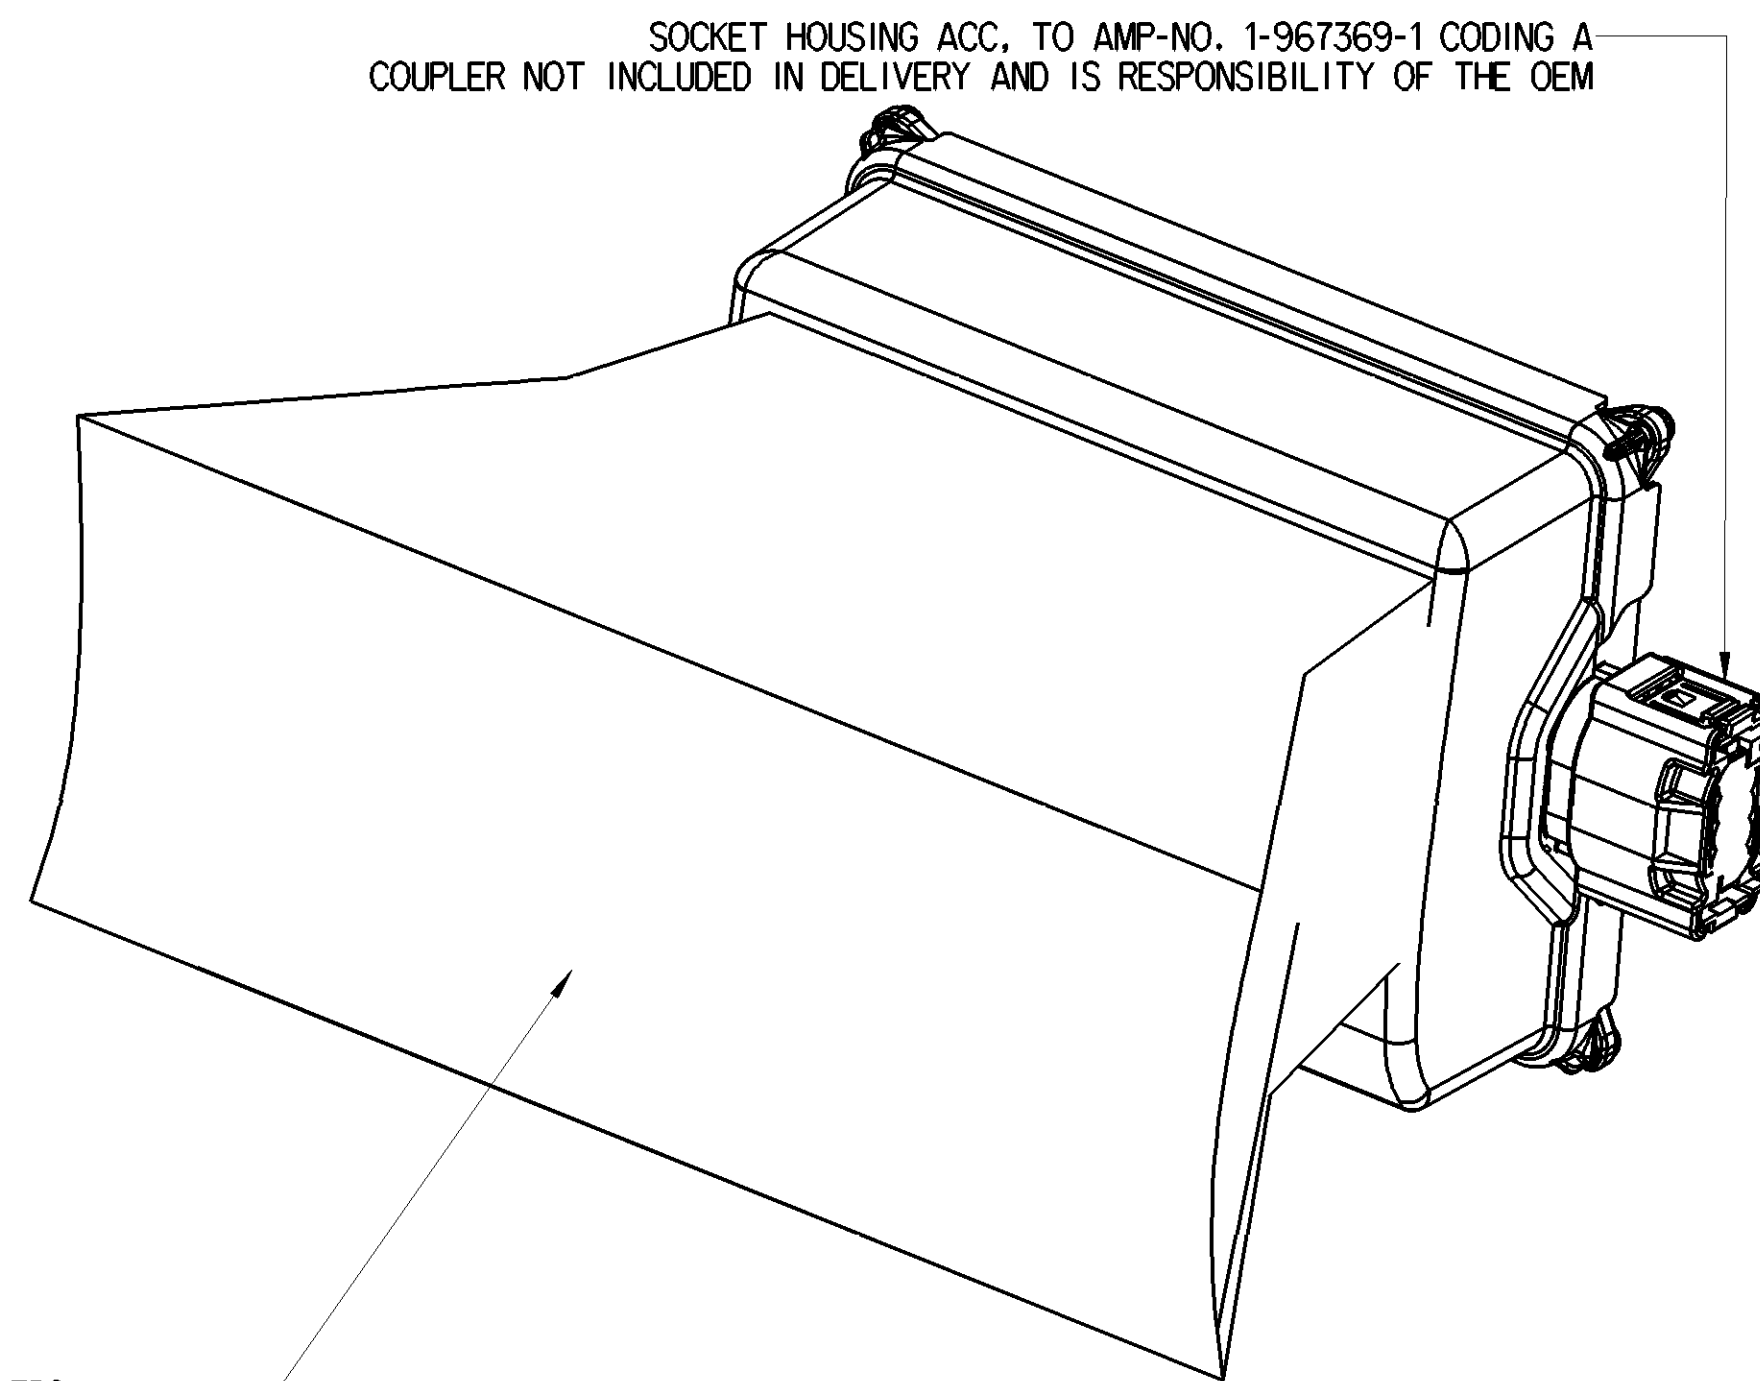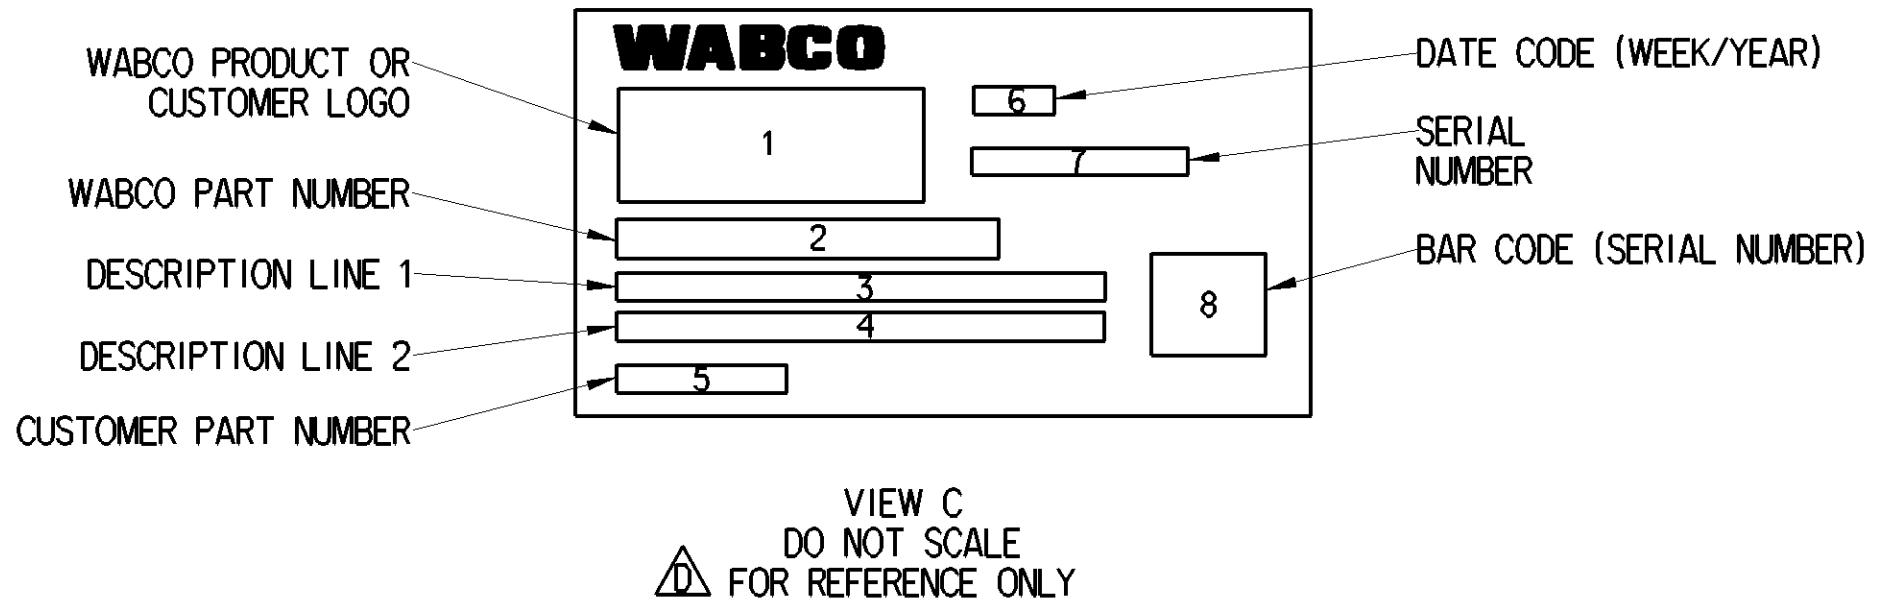


SOCKET HOUSING ACC. TO AMP-NO. 1-967369-1 CODING A-
COUPLER NOT INCLUDED IN DELIVERY AND IS RESPONSIBILITY OF THE OEM

MATERIAL AND DESIGN OF COVERS
IN THIS AREA NEED
AGREEMENT WITH WABCO

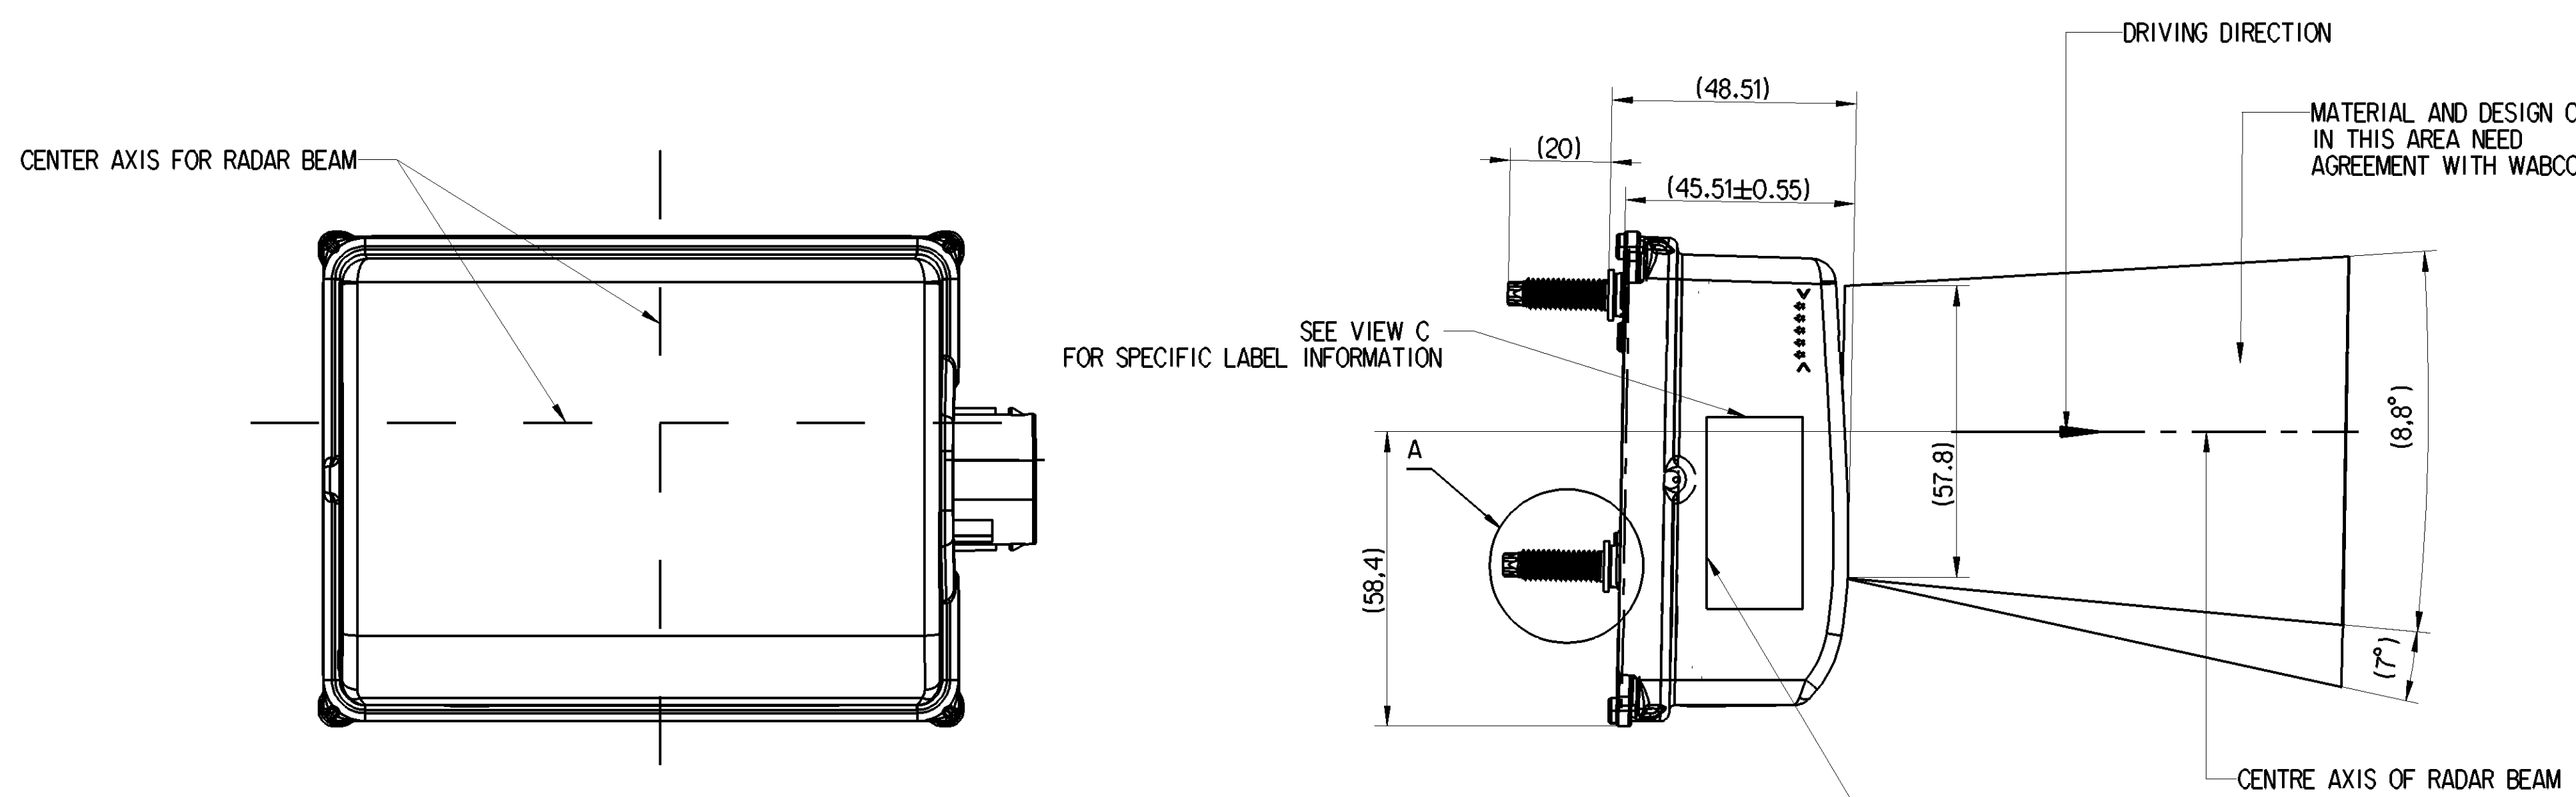


Auxiliary view B
Scale 2:1

 FOR REFERENCE ONLY

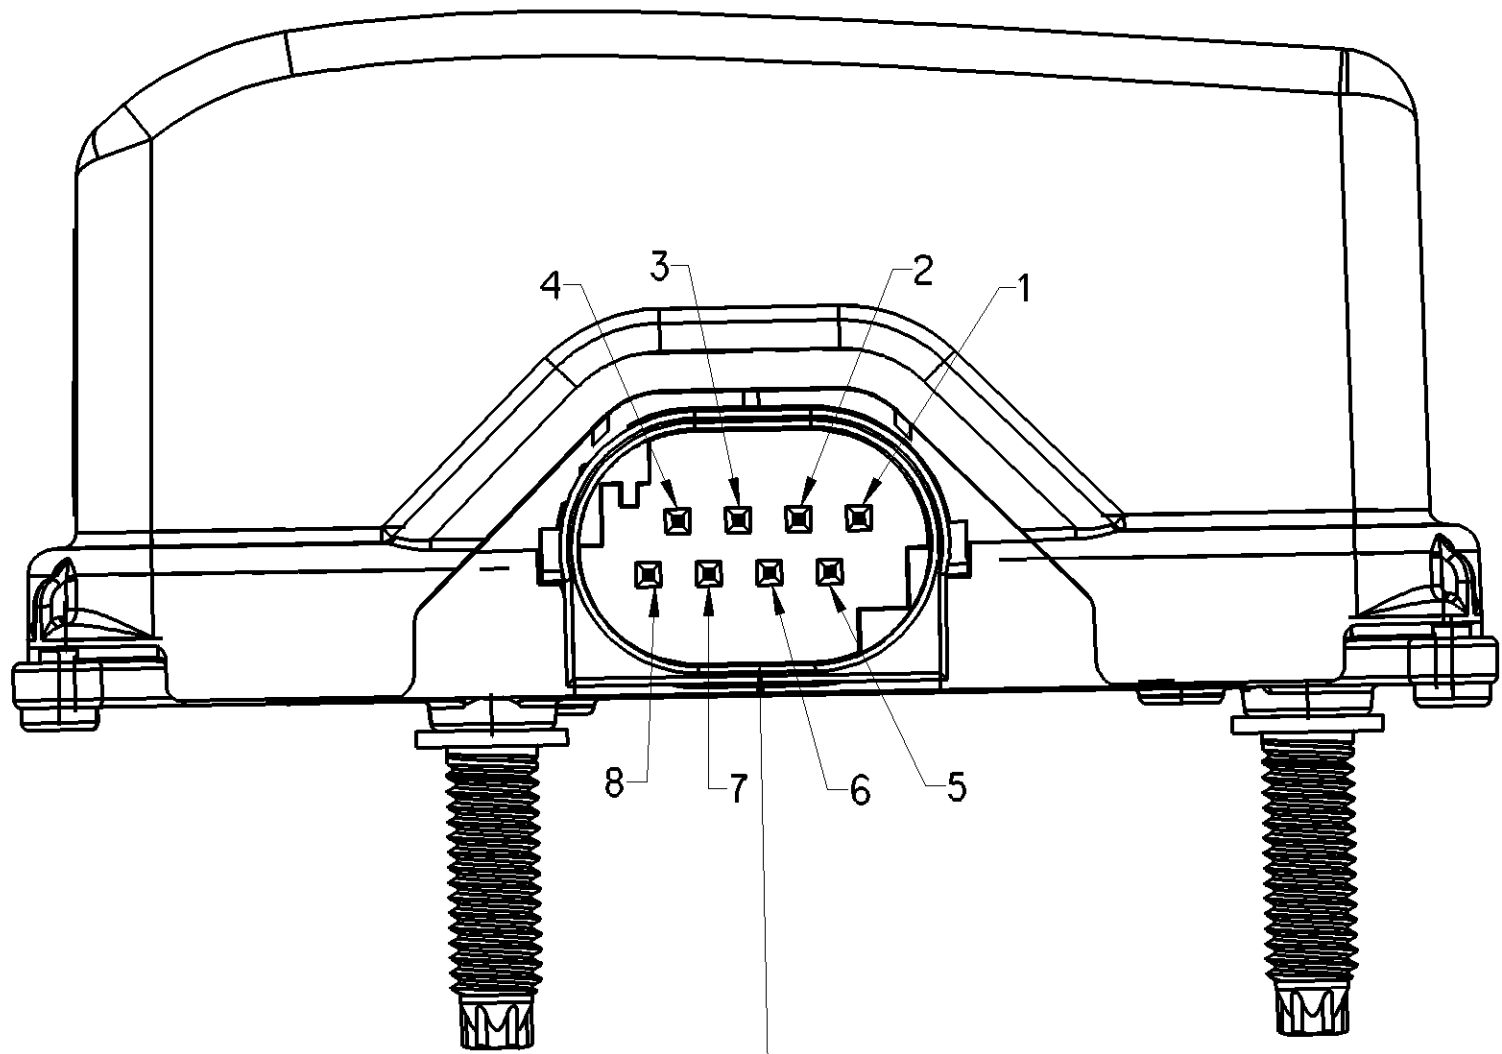

SHROUDED CONNECTOR 8-POLE ACC.
TO AMP-NO.114-18063-034 CODING A;
DO NOT TOUCH THE PINS

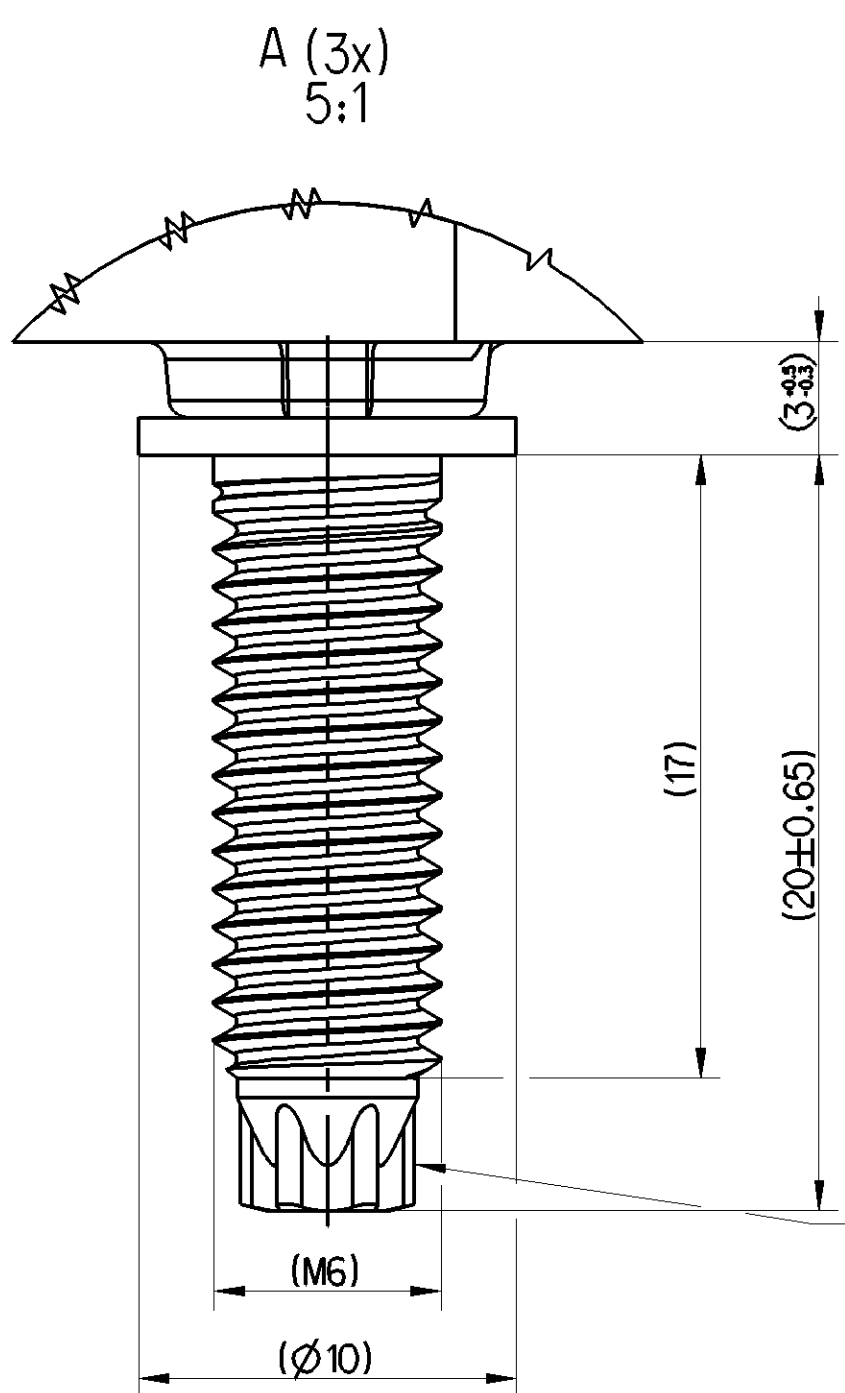

MATERIAL: ST 8.8. SURFACE ZnNi5m OR ZnNi8m
STOP SURFACE OF MOUNTING STUD SHALL BE IN FULL CONTACT WITH HOLE COLLAR
NUT, BRACKET AND MOUNTING STUD SHALL BE ASSEMBLED FREE OF CLEARANCE.

USE OF A LOCK NUT IS MANDATORY.

	400 872 452 0	400 872 452 0_084	A7450032-001	DC-Class 8	750 MM	Cummins L9, L9N, X12, X12N	N/A	ALLISON AUTOMATIC	E8.14	ECR3 ACTIVE AEB5 ONLY	N/A	INTEGRATED (SA 0x17)
	400 871 486 0	400 871 486 0_084	A7450013-002	ACTT TERMINAL TRACTOR	488 MM	CUMMINS ISB	N/A					WABCO (SA 0x27)
	400 871 485 0	400 871 485 0_084	A74A0005-001	ACX REFUSE TRUCK	984 MM	CUMMINS L9, L9N, X12, X12N	N/A					INTEGRATED (SA 0x17)
	WABCO PART NUMBER	PARAMETER SET	CUSTOMER PART NUMBER	VEHICLE MODEL	MOUNTING HEIGHT	ENGINE	RETARDER	TRANSMISSION	ABS SW	SW LEVEL	ACC	DISPLAY

TABLE 1-PART IDENTIFICATION

NOTES:

1. STORAGE TEMPERATURE: -50°C TO 105°C
OPERATING TEMPERATURE: -40°C TO 85°C
ONLY CAN COMMUNICATION: 85°C TO 95°C
2. DO NOT PAINT RADAR SENSOR.

THIRD ANGLE PROJECTION

[illegible]