
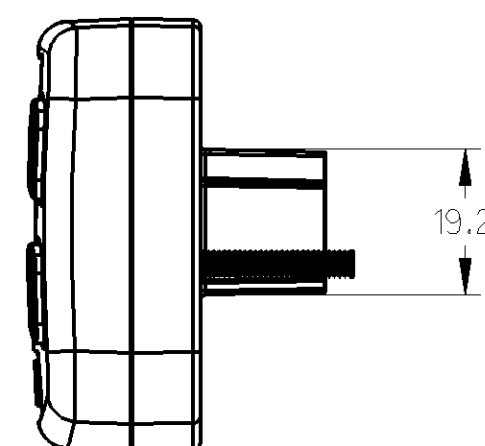


1. OPERATING TEMPERATURE: -20°C TO +60°C
2. OPERATING VOLTAGE: +9VDC TO +36VDC
3. REFER TO PRODUCT SPECIFICATION FOR FURTHER DETAILS.
4. RECOMMENDED FASTENER TIGHTNING TORQUE 6-8 IN-LBS
5. SOFTWARE VERSION #SOFO0086220

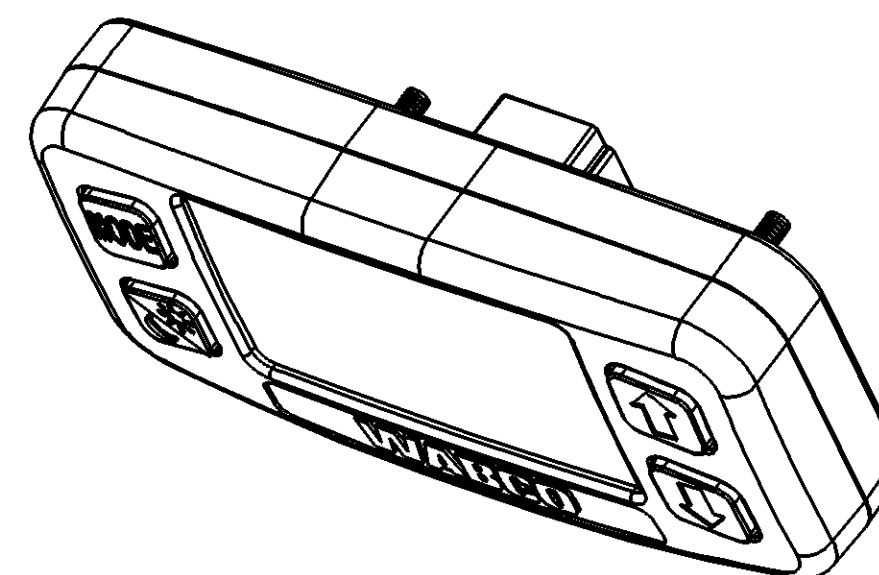

CONNECTOR	
MATING HARNESS CONNECTOR MOLEX 30700-1081	
MATING HARNESS TERMINALS MOLEX 33230-0003 OR MOLEX 33230-0004 OR TYCO 1393366-1	
PIN	FUNCTION
1	N/C
2	N/C
3	N/C
4	IGNITION
5	GROUND
6	J1939-
7	J1939+
8	N/C

General Specification: JED-334-1, Size ISO 14405 LP				
Further Technical Data:				
Doc. Code:			Sheet: To	
General Tolerances JED-261				
Range of Nominal Dimensions (± mm)				
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400
Fine	0.5	1.0	1.5	2.0
Medium	1.0	2.0	3.0	4.0
Coarse	2.0	3.5	5.0	6.5
Tapped Holes acc.				
1) Tolerance Class Applied Crossmarked				

Copyright WABCO®		
Date	Signature	
Drawn		
2019-04-10	Srinivasaperum	
Checked		
2019-04-26	Murphy	
Expert		
-		
Mass	Scale	
0.113 KG	1:1	
Size	CAD System	
A 2	CREO	

ONGUARD DISPLAY
GEN 2

Material No.			Date of first issue:		
400 871 801 0			Doc.Code	Language	Sheet
			005	EN	1/
ECN-No.	Revision	Techn. Resp.	Replacement for		
501013	3 C	6832 MW	-		