


Non è permesso consegnare a terzi o riprodurre questo documento, né utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Tout Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

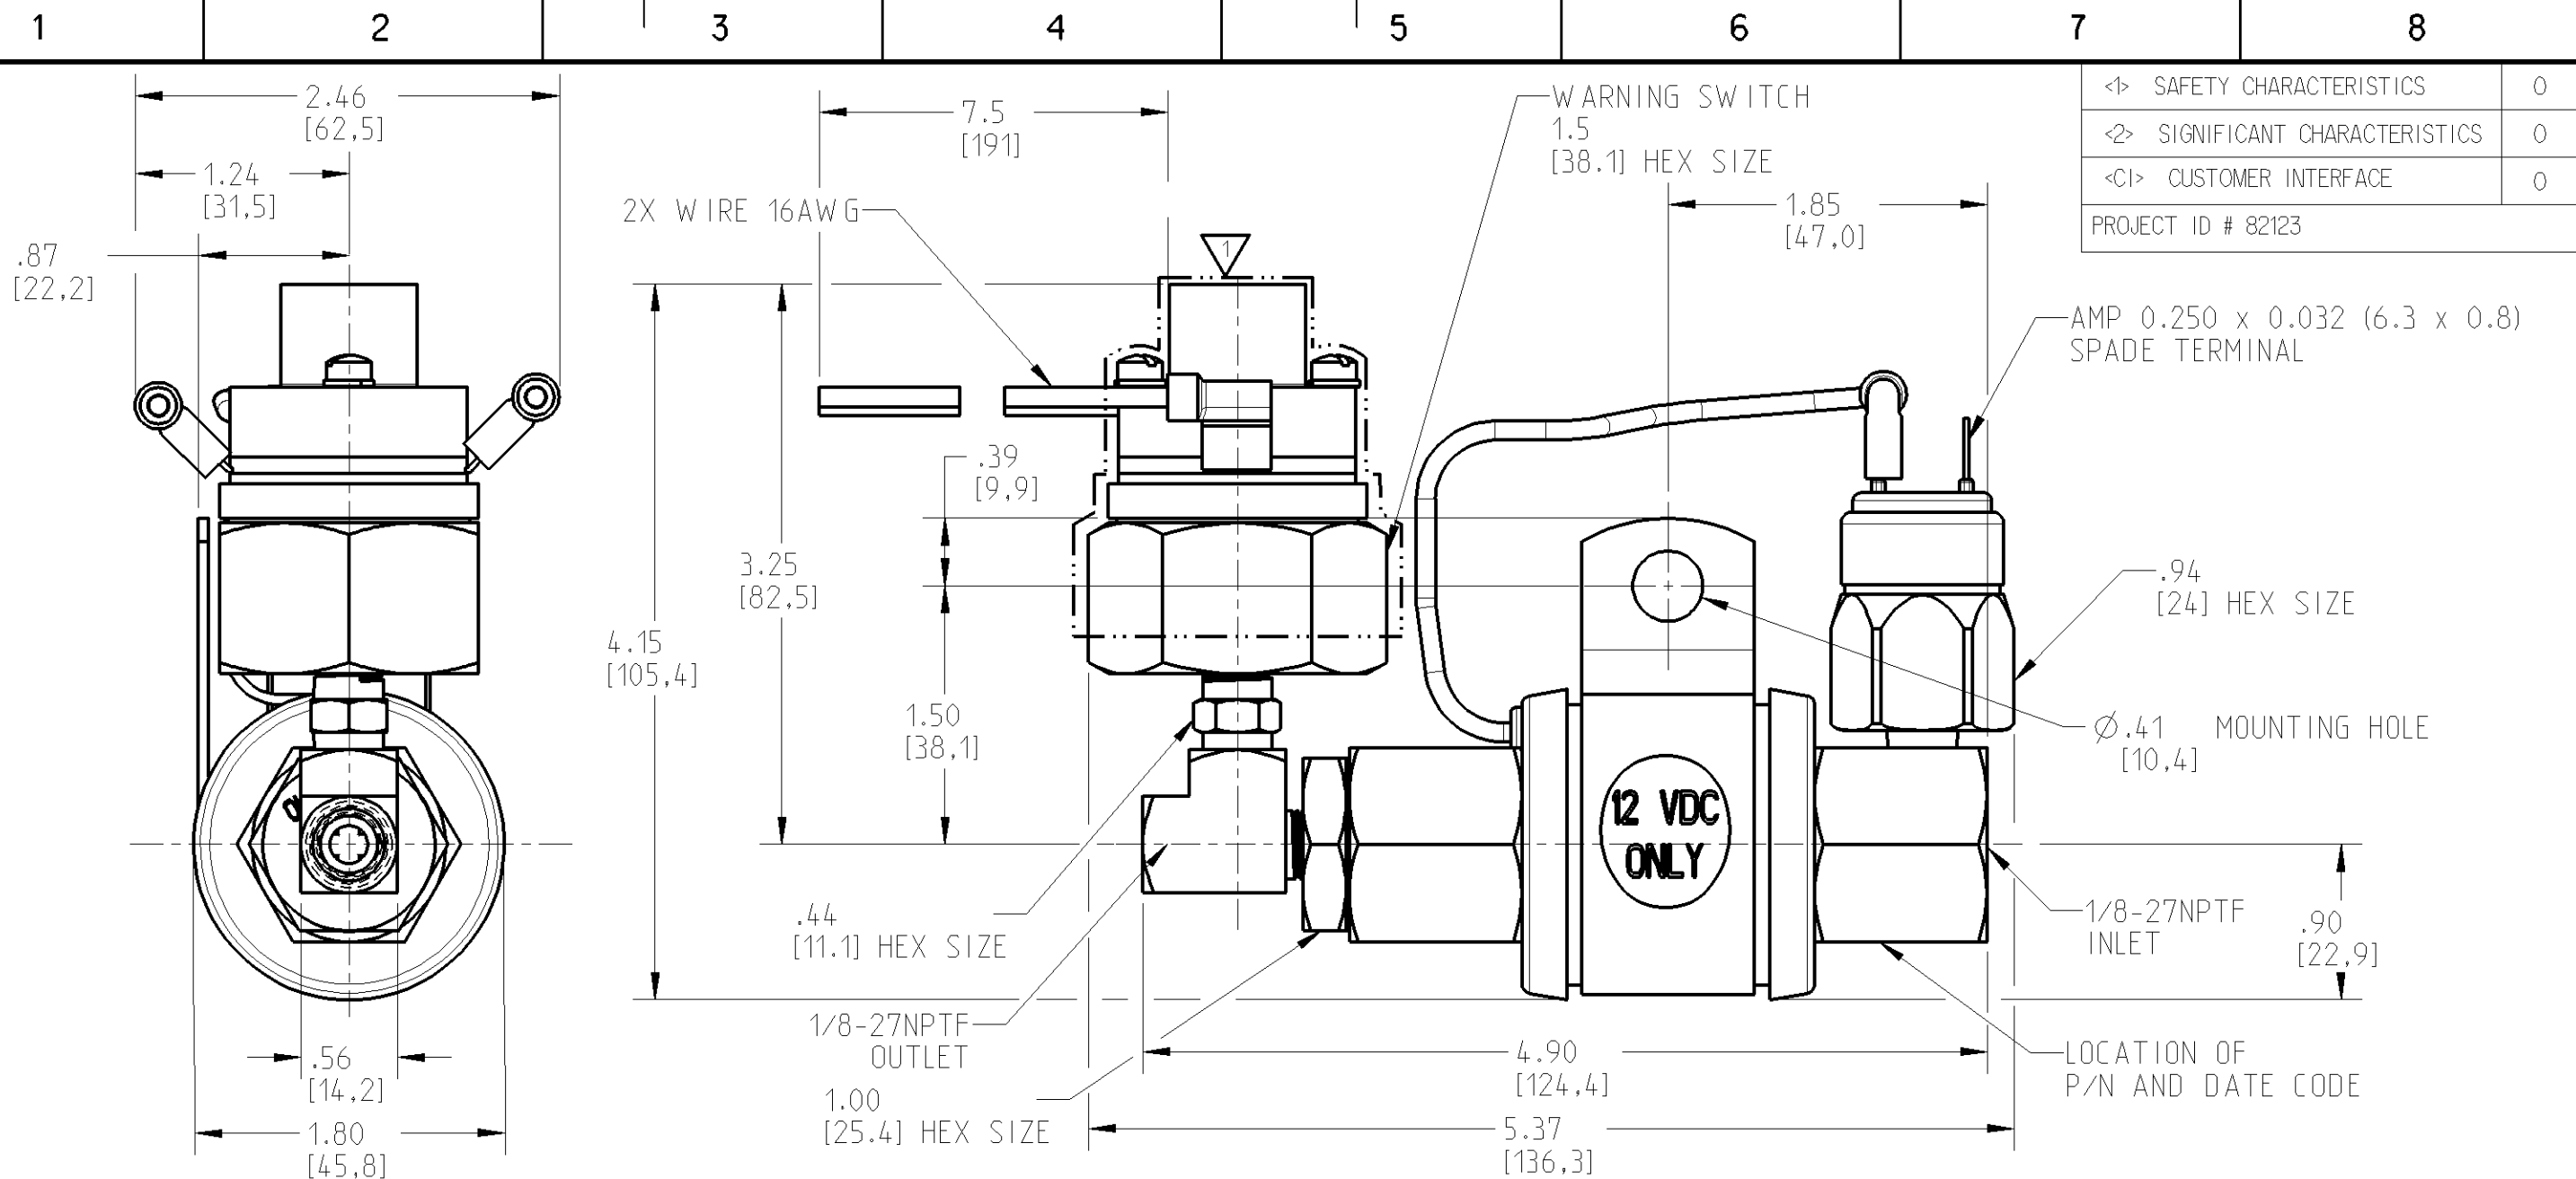

PERFORMANCE CHARACTERISTICS:

1. MAXIMUM WORKING PRESSURE: 2000 PSI
2. FOR USE IN 12 VOLT APPLICATION.
3. LOW PRESSURE WARNING SWITCH SPECIFICATIONS:
 - CONTACT ARRANGEMENT: NORMALLY CLOSED
 - RATING: 30 AMP, 6VDC
20 AMP, 12 VDC
 - PRESSURE SETTING: CONTACTS OPEN BY 700 PSI INCREASING
 - RELEASE: -10% OF SETTING
 - OPERATING TEMPERATURE: -20 °F TO 250 °F
4. ARMING SWITCH/COIL SPECIFICATIONS:
 - CONTACT ARRANGEMENT: NORMALLY OPEN
 - PRESSURE SETTING: CONTACTS CLOSE BETWEEN 50 TO 100 PSI
 - COIL RESISTANCE: 3 OHMS

SERVICE PARTS:

1. LOW PRESSURE WARNING SWITCH KIT 02-600-017.

INCH
[MILLIMETER]

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.

MICO, INC. CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

NOTES:

1. TO BE USED WITH DOT 3, 4 OR 5 BRAKE FLUID ONLY.
2. DIMENSIONS WITHOUT TOLERANCE MAY VARY BETWEEN UNITS AND ARE TO BE USED FOR REFERENCE PURPOSES ONLY. MILLIMETER VALUES MAY NOT BE AN EXACT CONVERSION OF INCH VALUES.
3. THE PRESSURE SWITCH IS SURROUNDED BY A SILICONE SEALANT IN THE APPROXIMATE AREA.
4. LOW PRESSURE WARNING SWITCH. UNION AND TEE MAY BE SHIPPED UNASSEMBLED. TORQUE COMPONENTS TO 9-15 LBFT

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO		WABCO BRAKE LOCK					
Further Technical Data:						Date						Signature	
Doc. Code:		Sheet:		To		Drawn							
						2021-03-12						LaPoint	
						Checked						2021-03-12	
General Tolerances JED-261								Expert					
Range of Nominal Dimensions (± mm)						Biran Wolff							
Class 1)		≤ 50		> 50 > 180 < 180 < 400 > 400		±3°							
Fine		0.5		1.0		1.5		2.0					
Medium		1.0		2.0		3.0		4.0					
Coarse		2.0		3.5		5.0		6.5					
Tapped Holes acc. -						Mass		Scale		Material No.			
1) Tolerance Class Applied Crossmarked						3.50 KG		1:1		407 128 000 0			
						Size		CAD System		Date of first issue 2021-03-12			
						A 3		CREO		Doc.Code Language Sheet			
										005 EN 1/1			
						ECN-No.		Revision		Techn. Resp.			
						-		-		7028			
										Replacement for			
										-			

100mm