
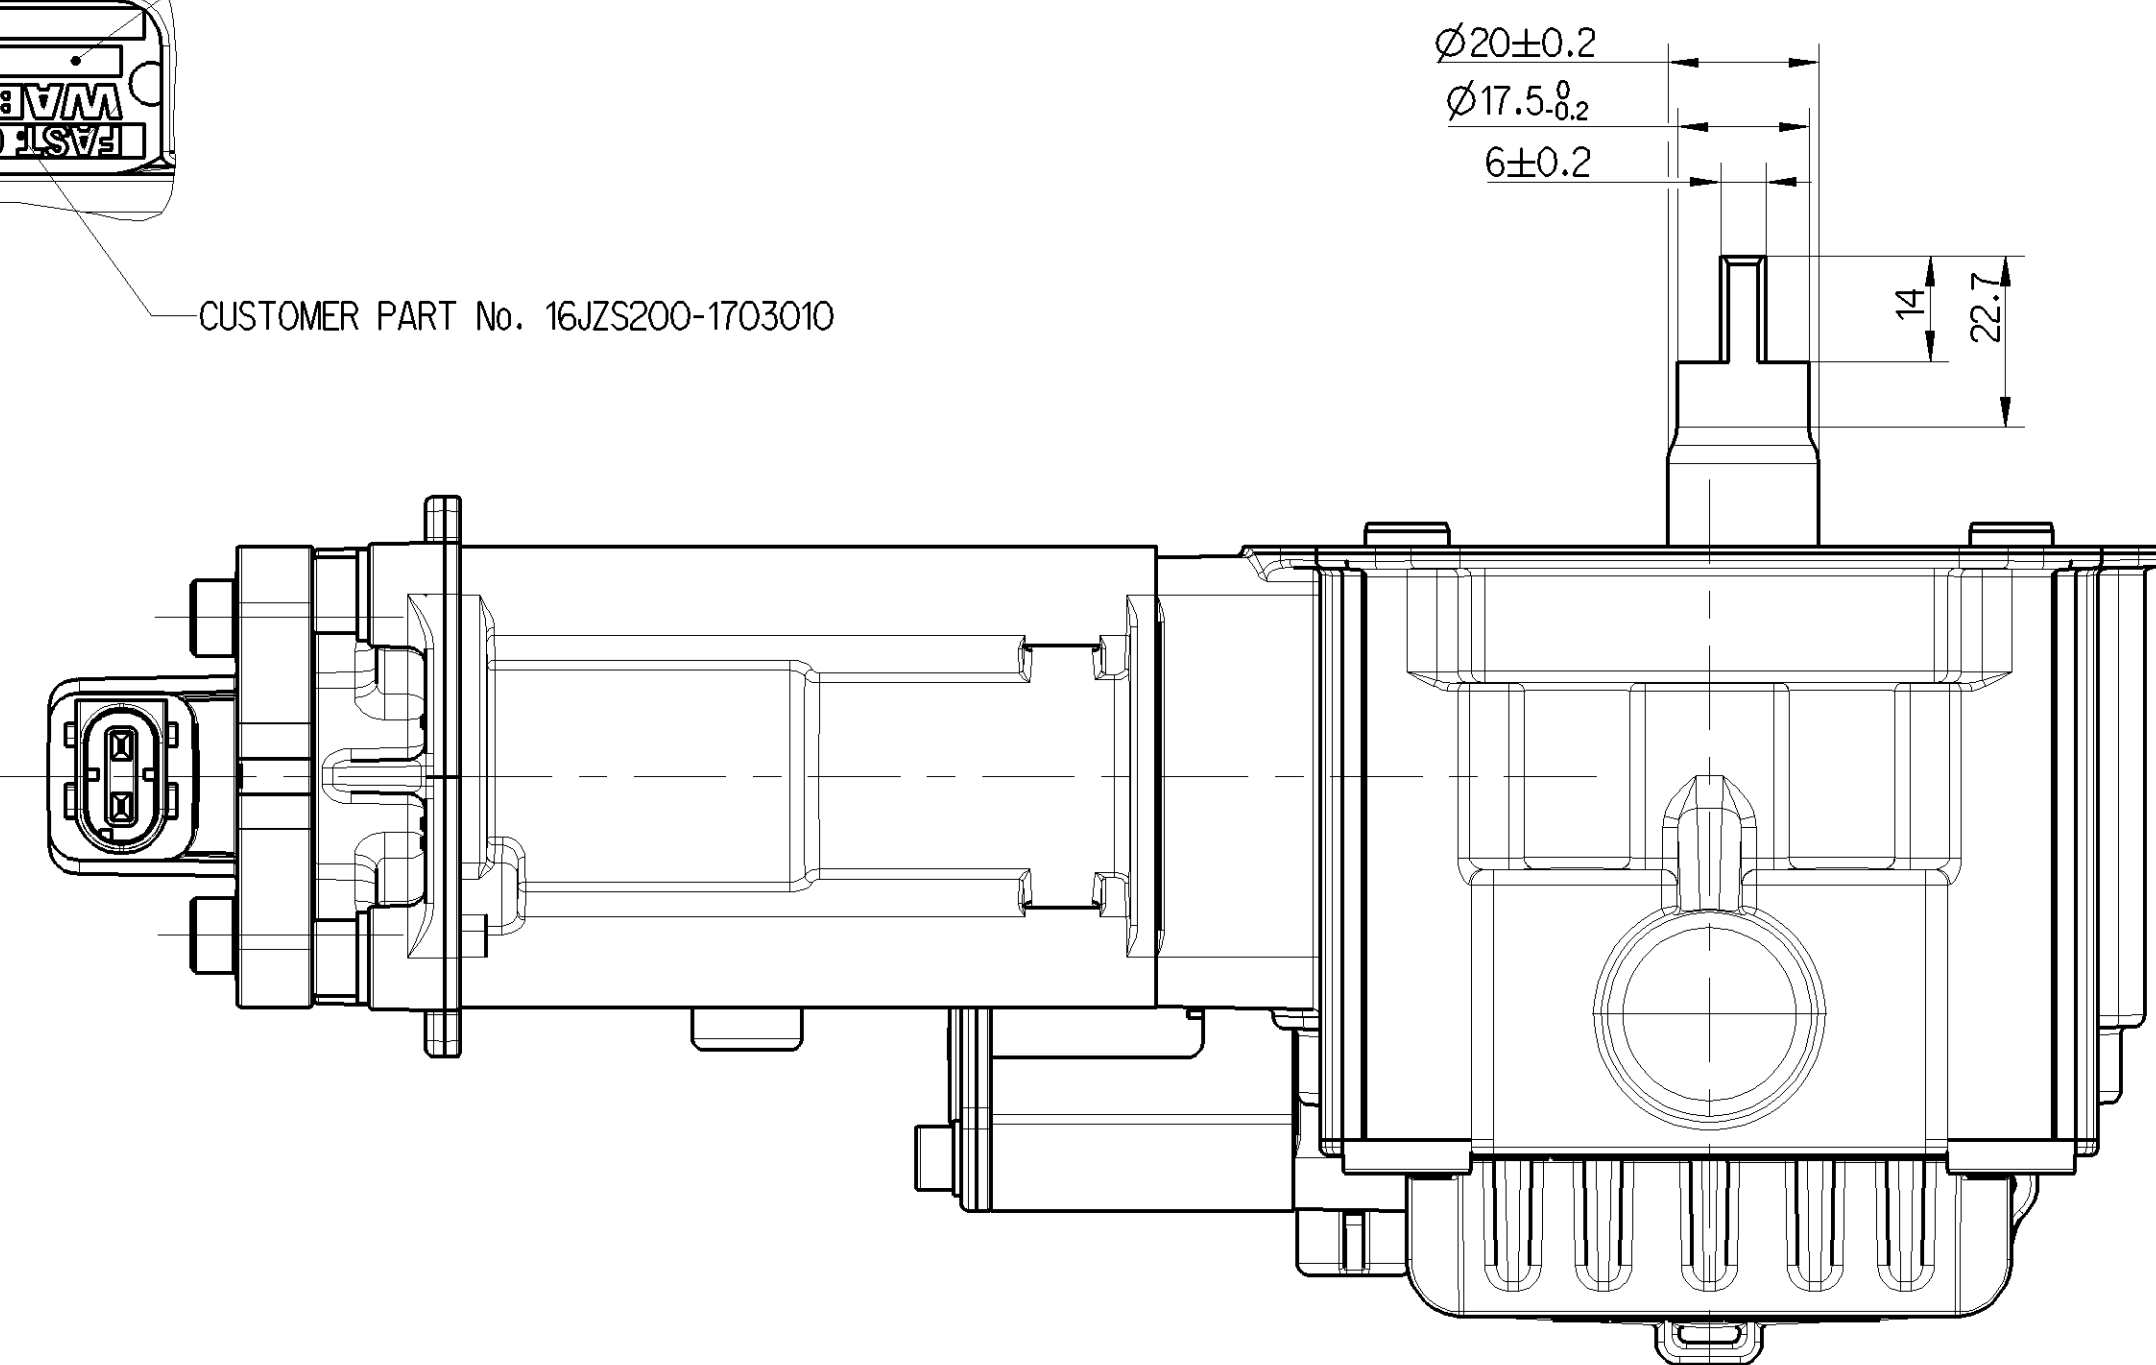
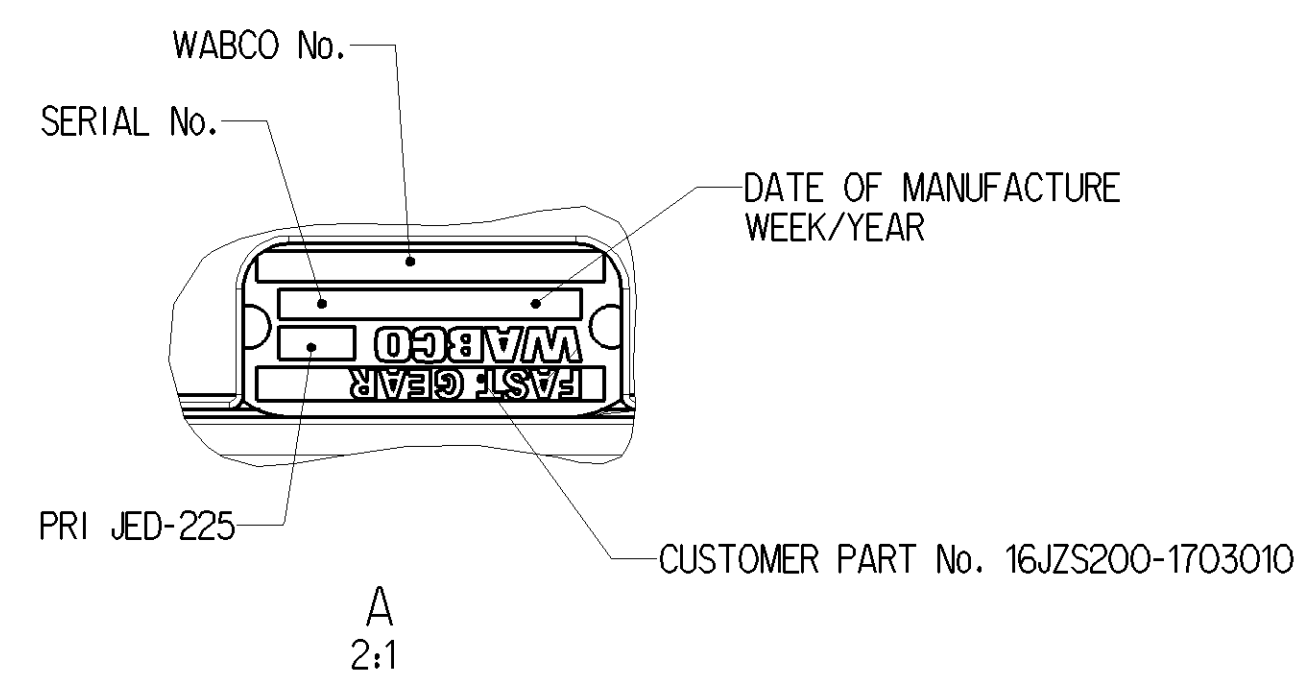
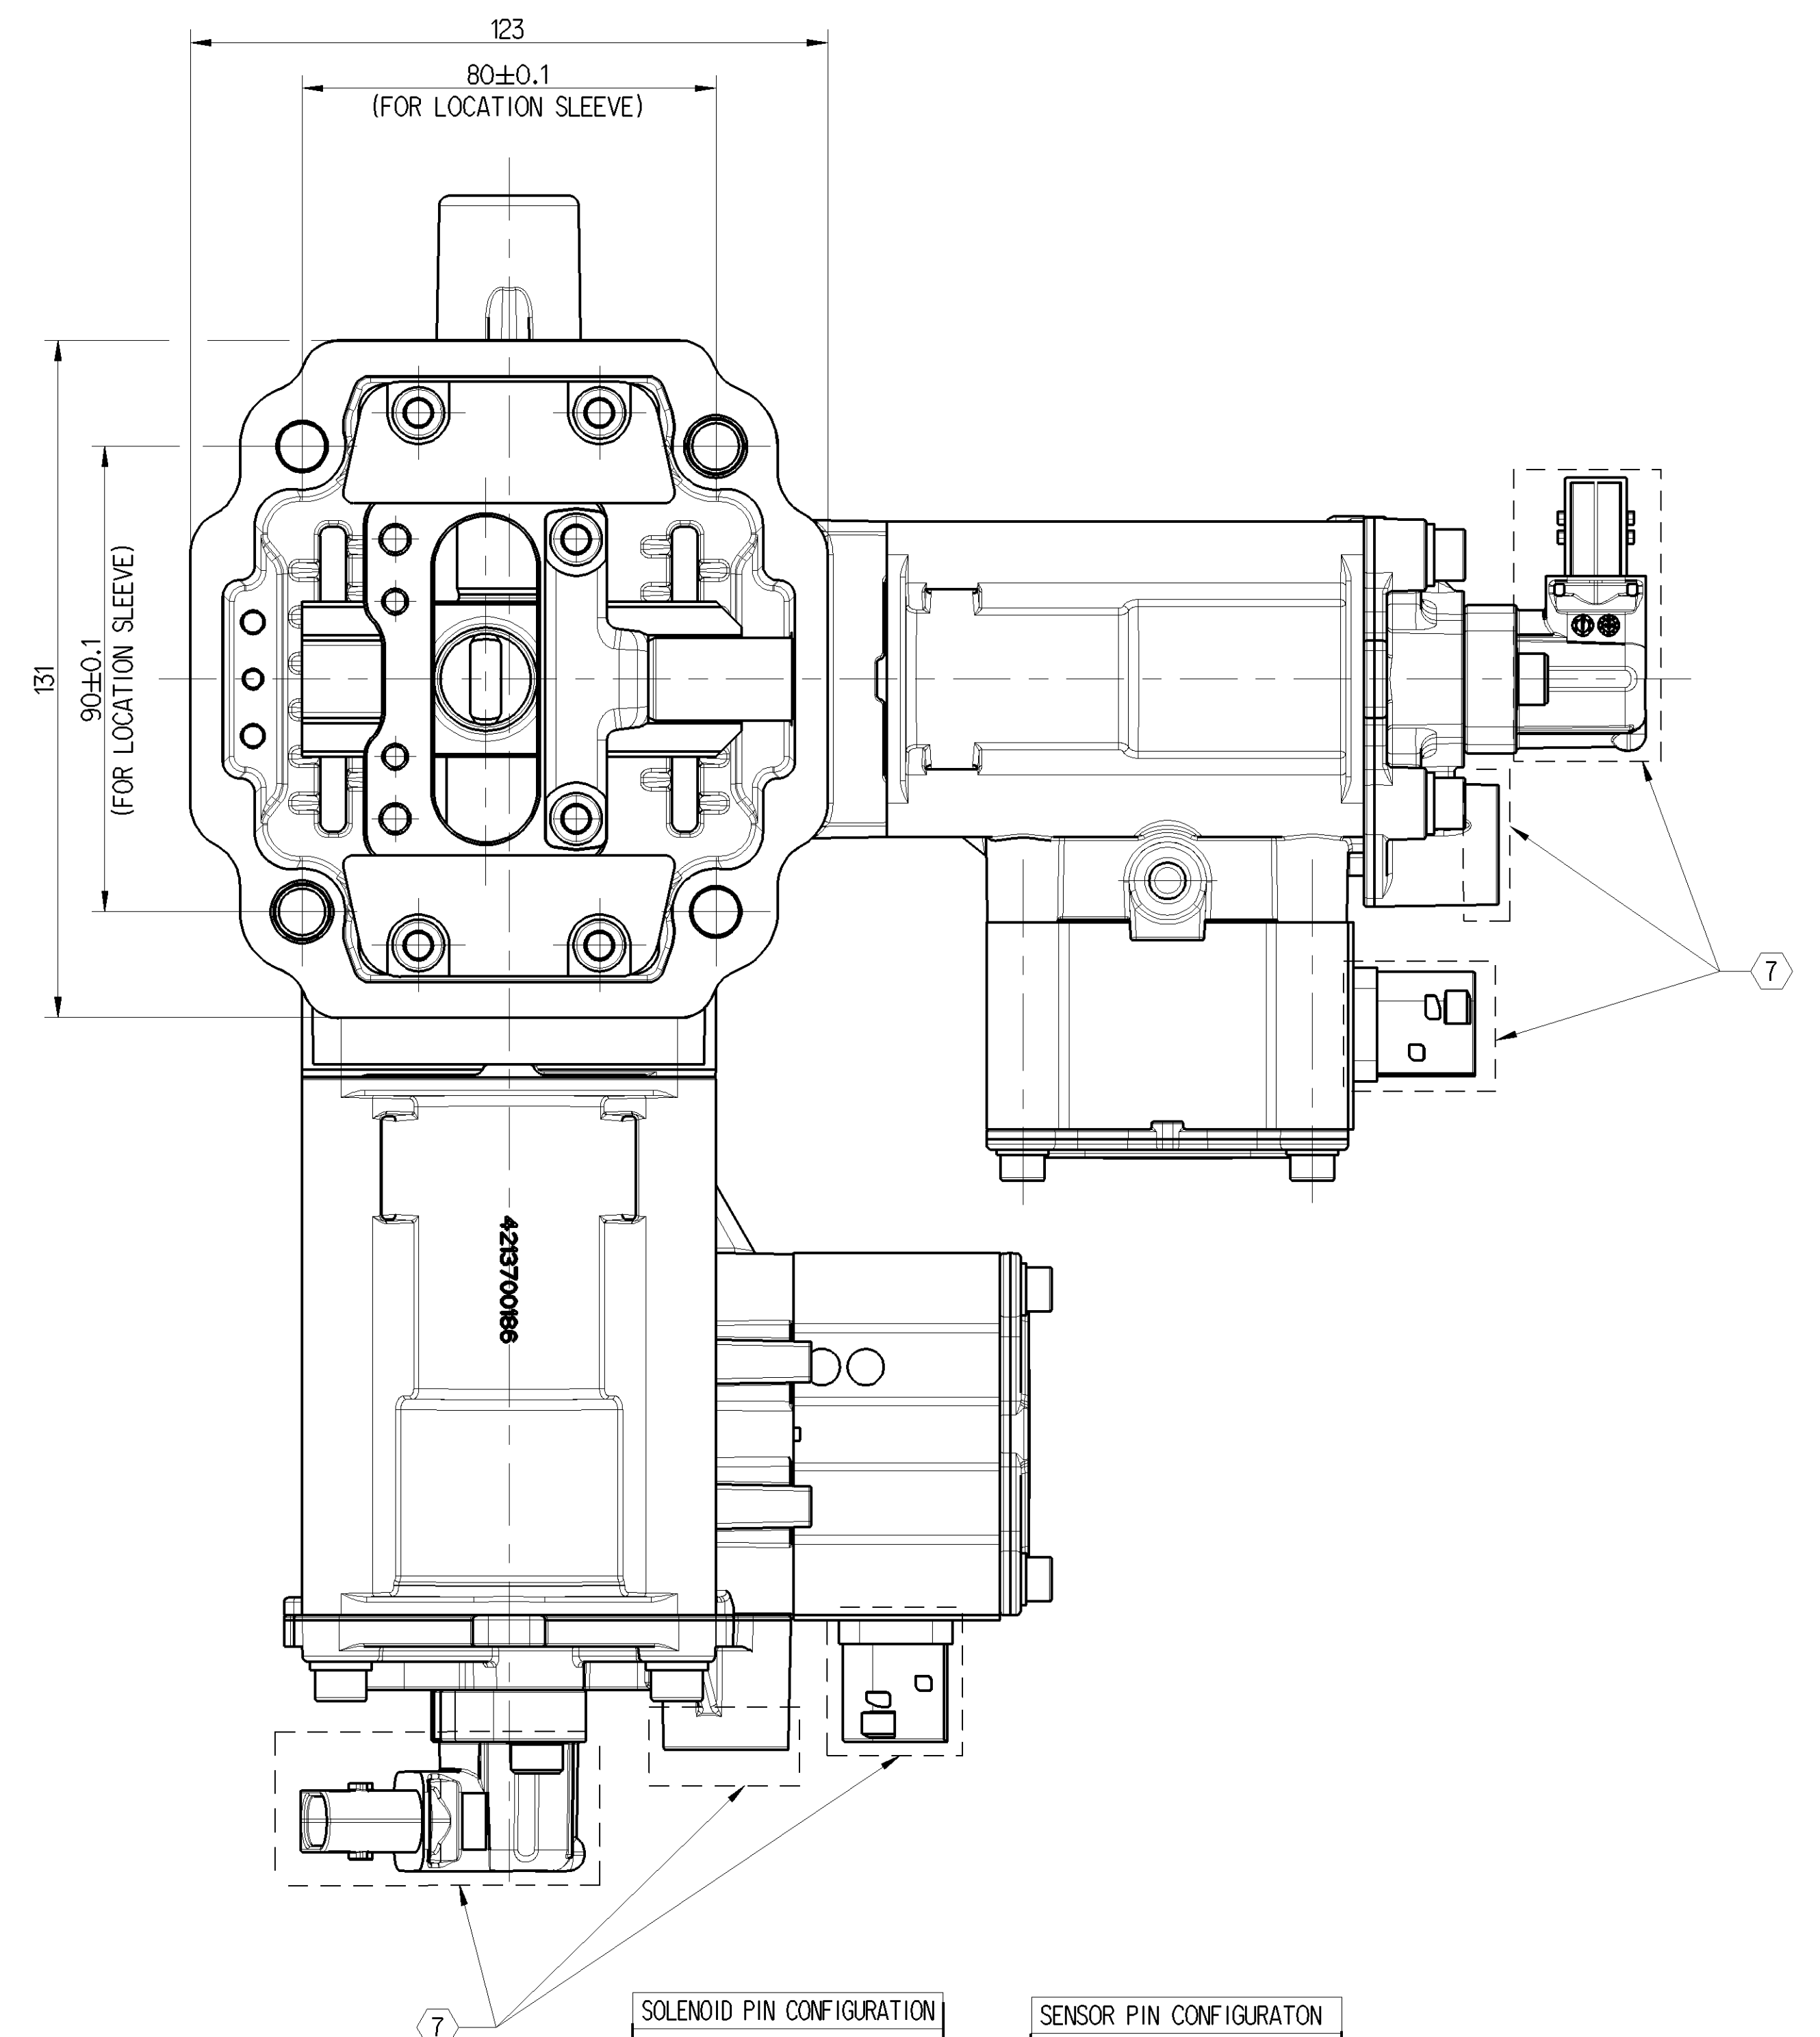
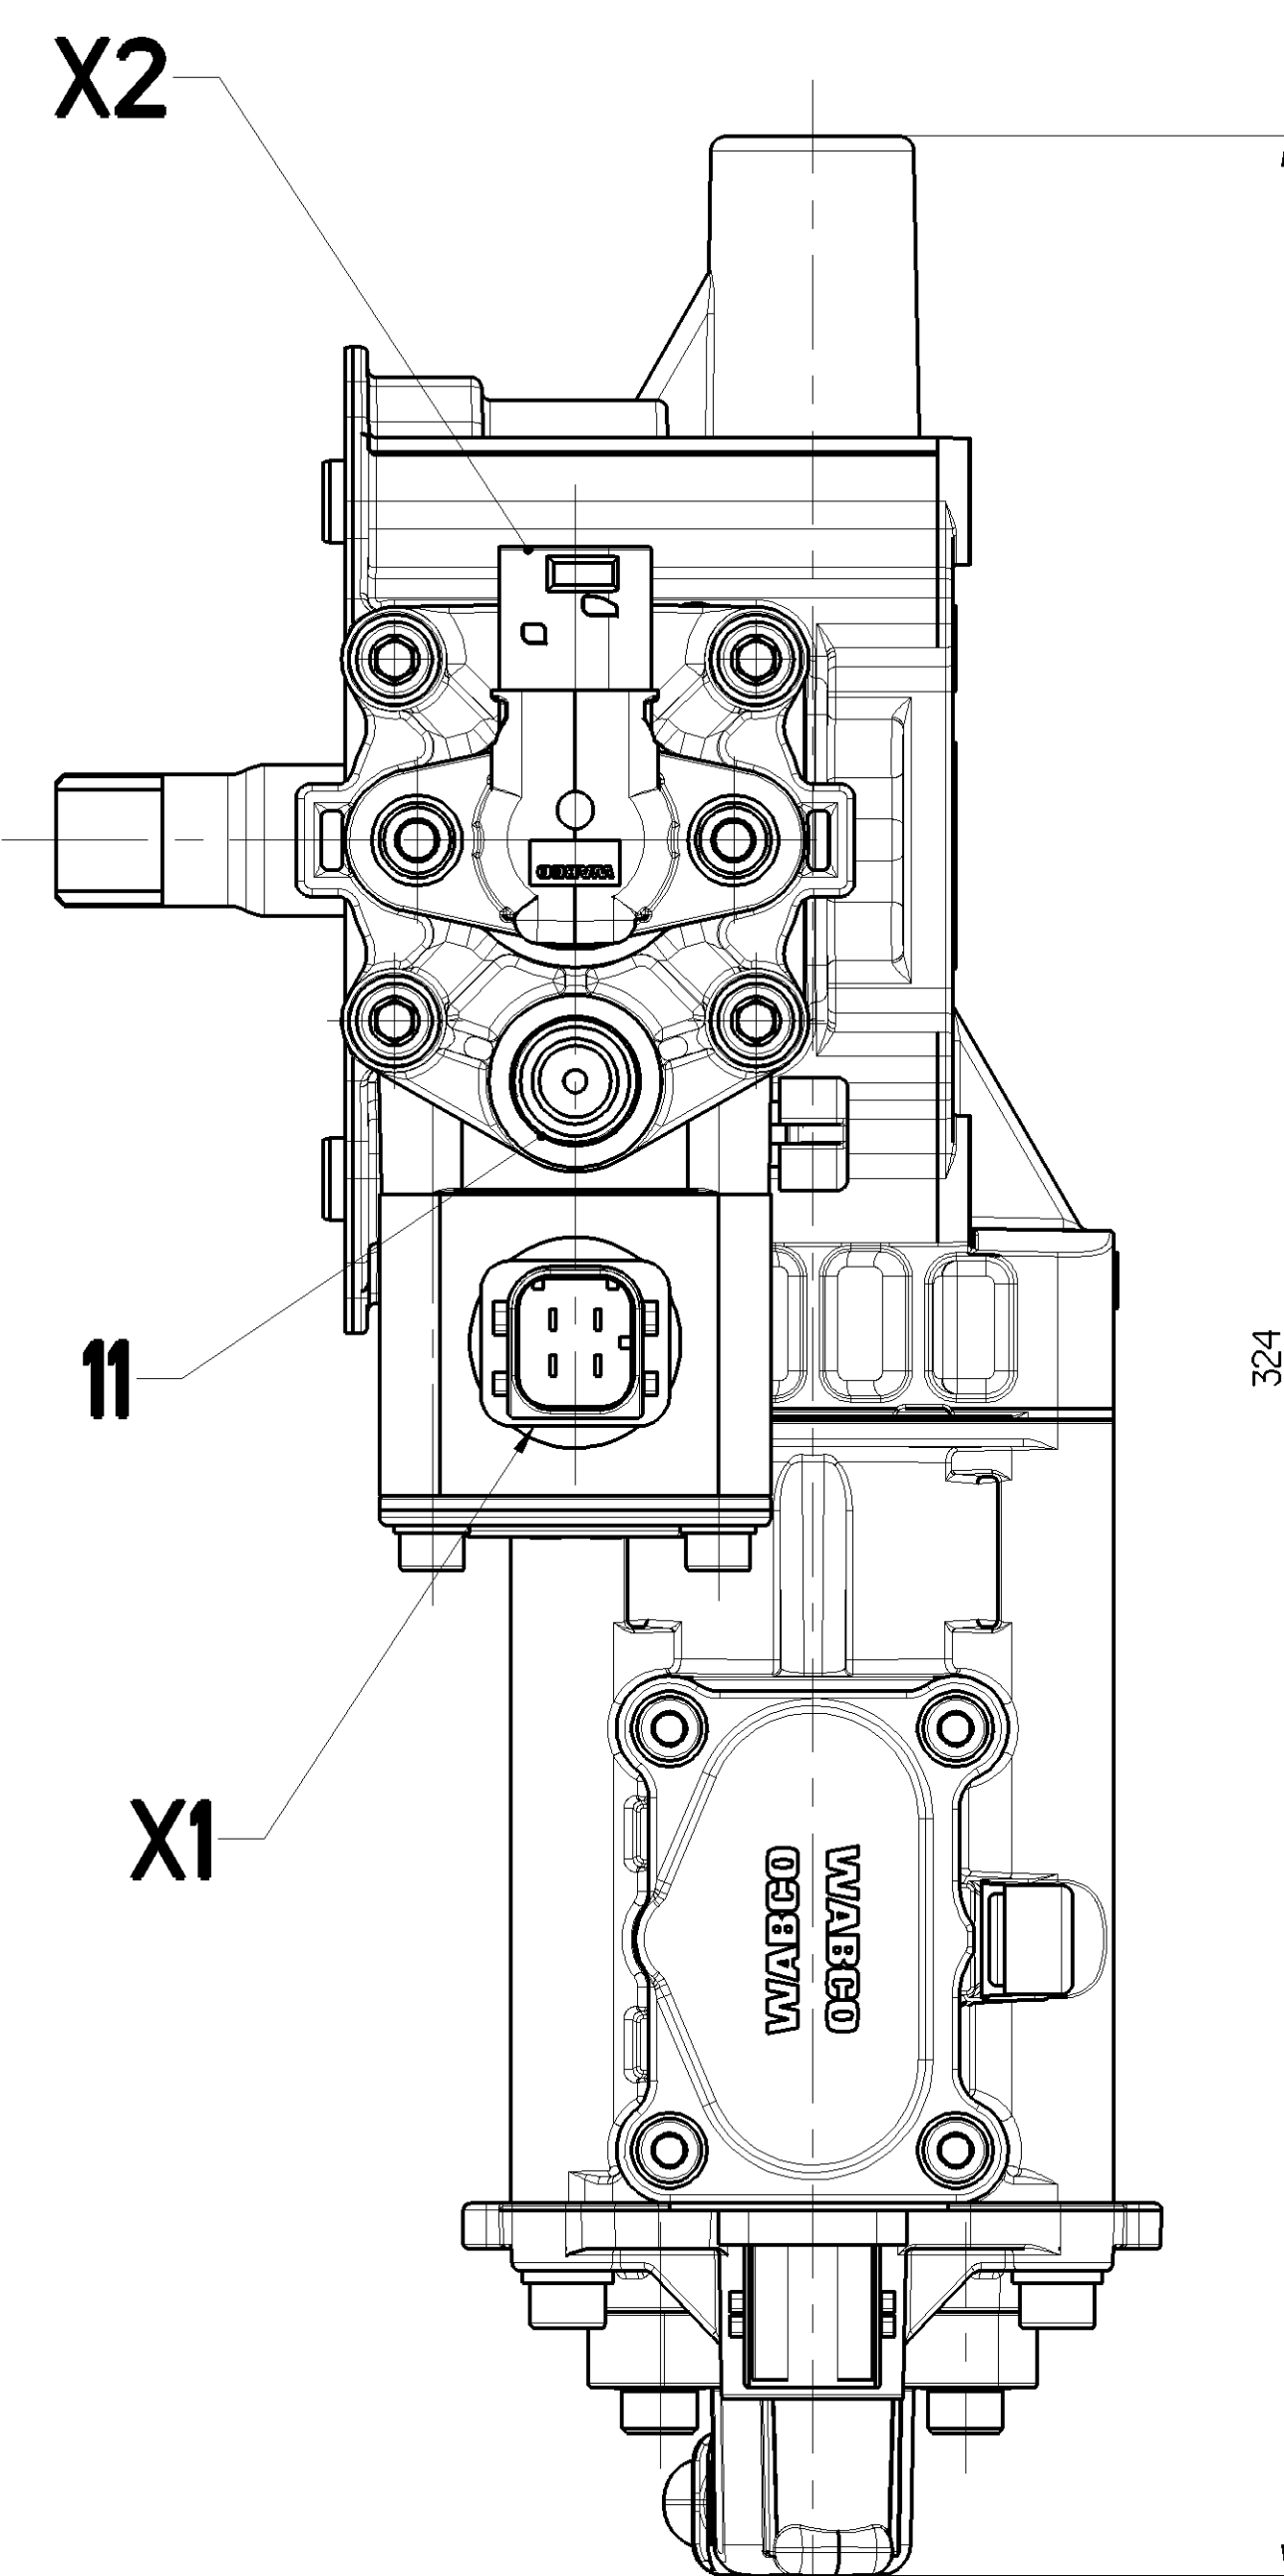
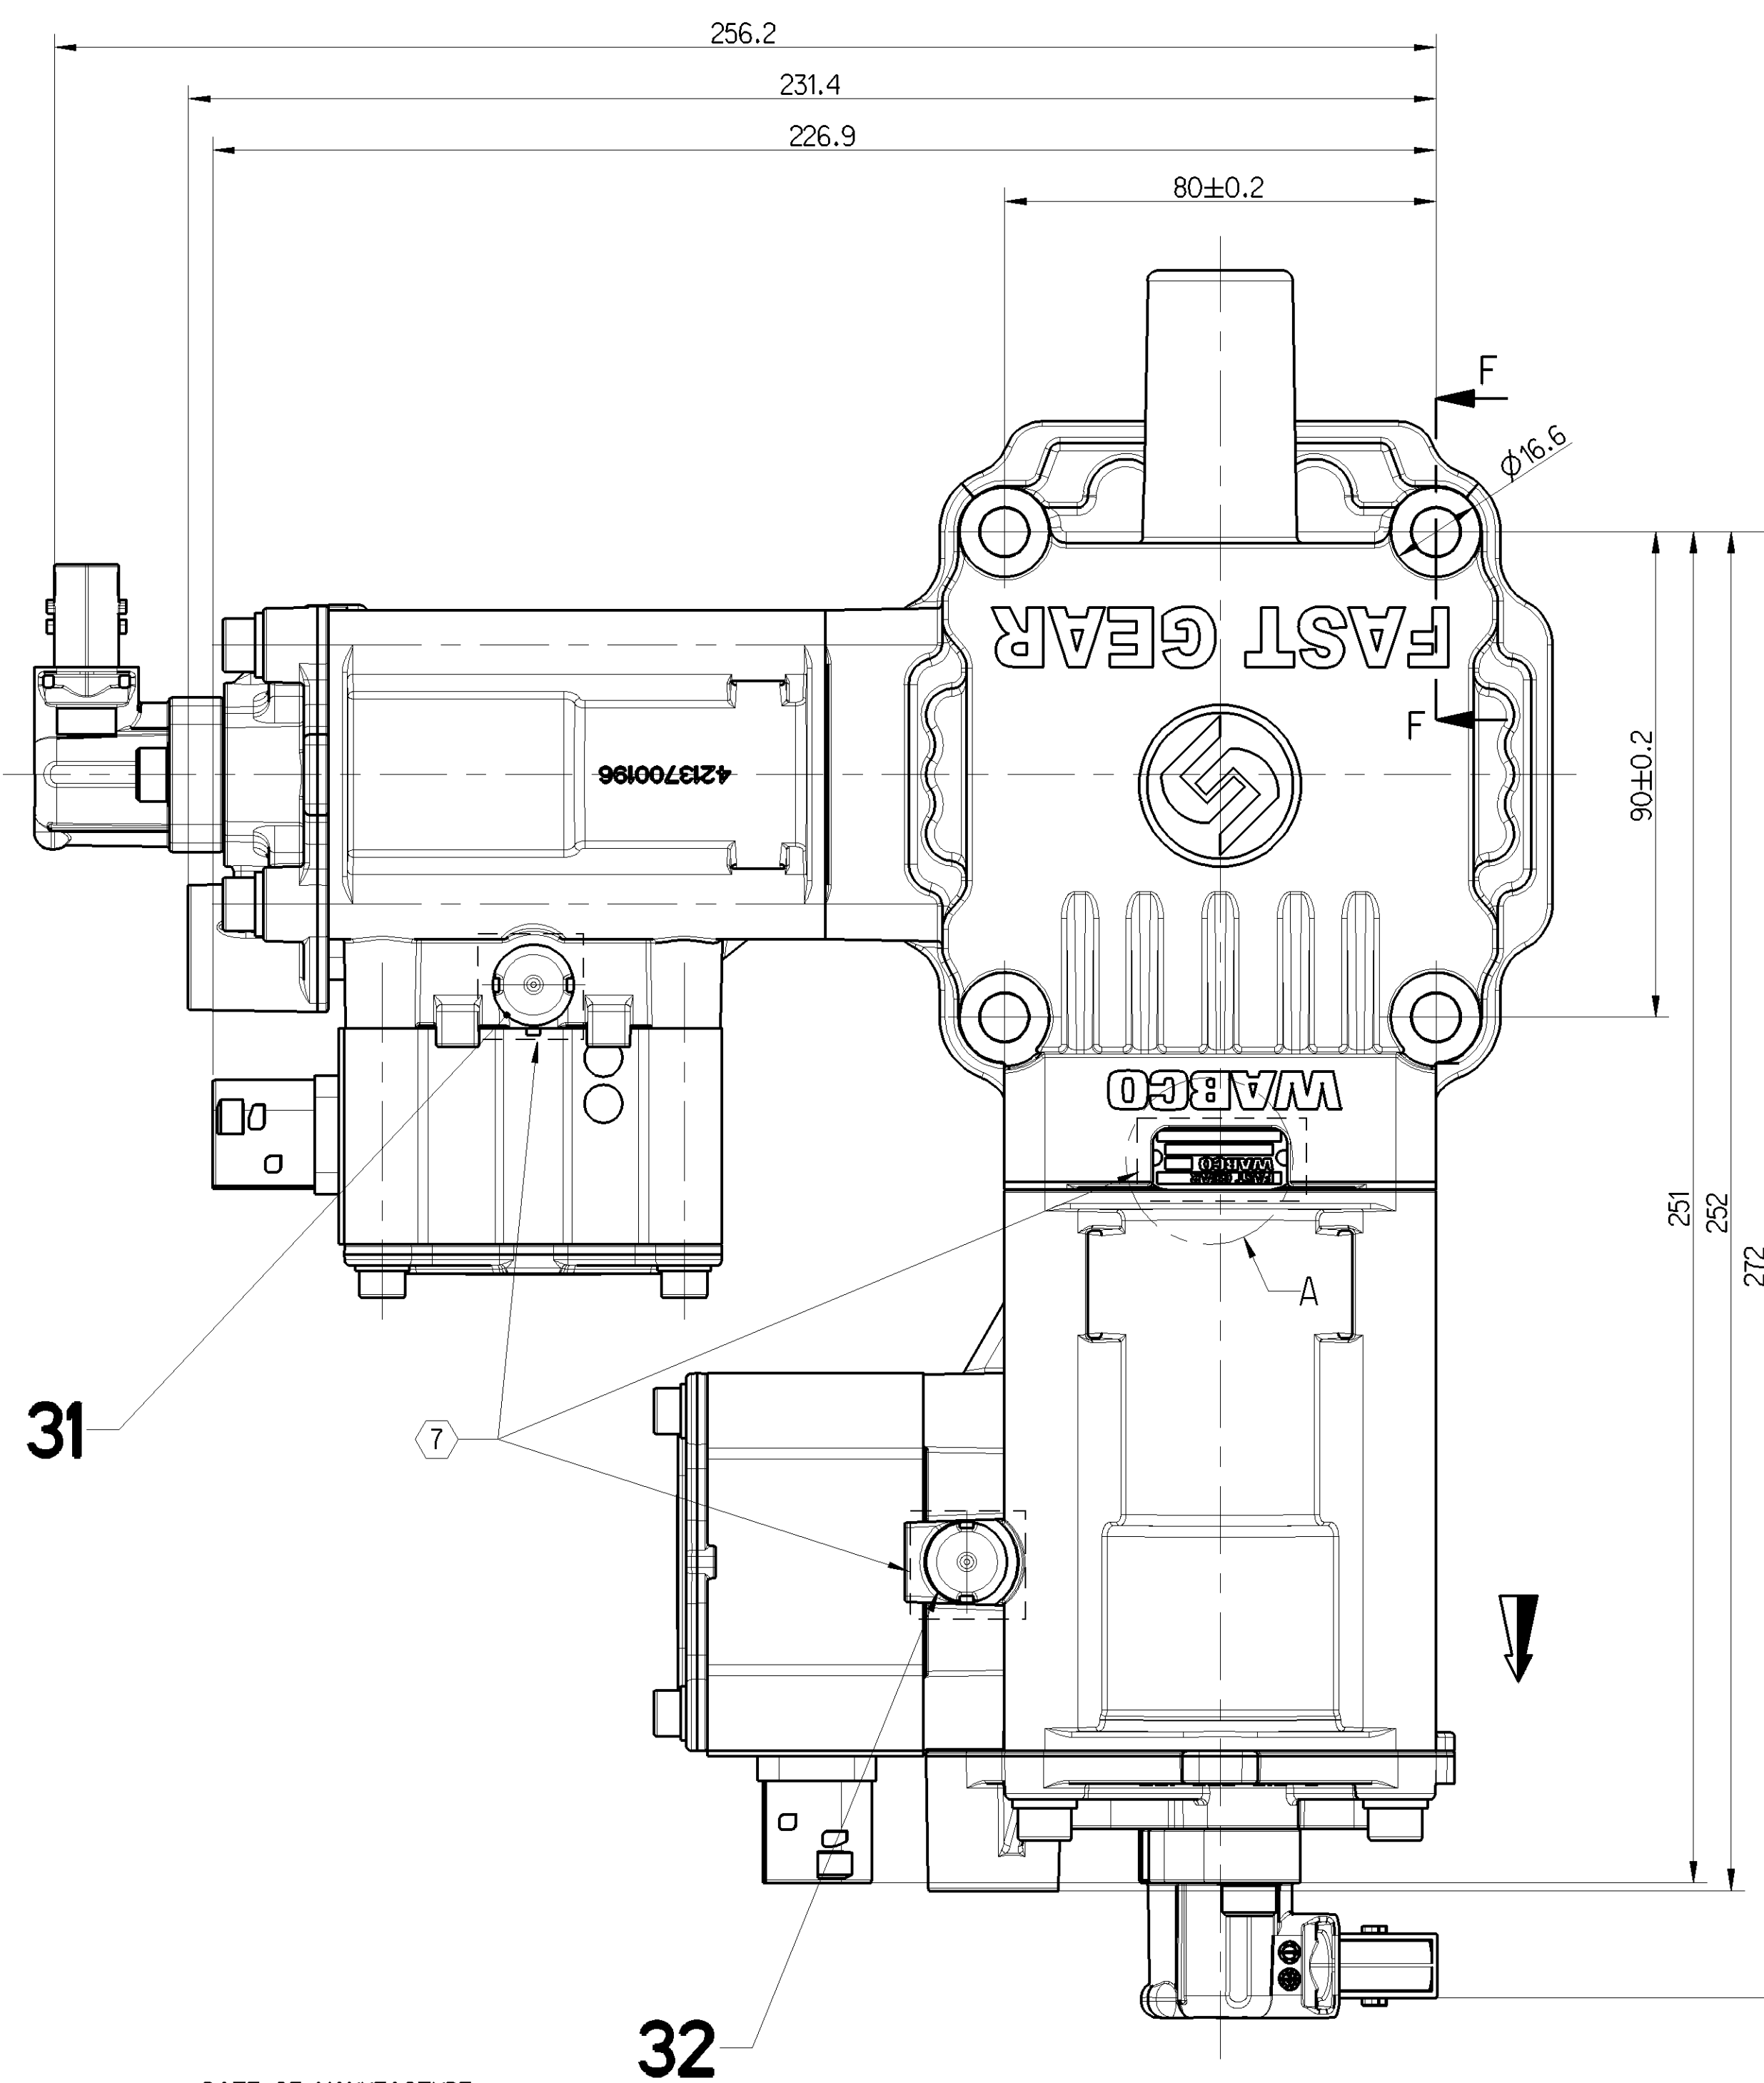
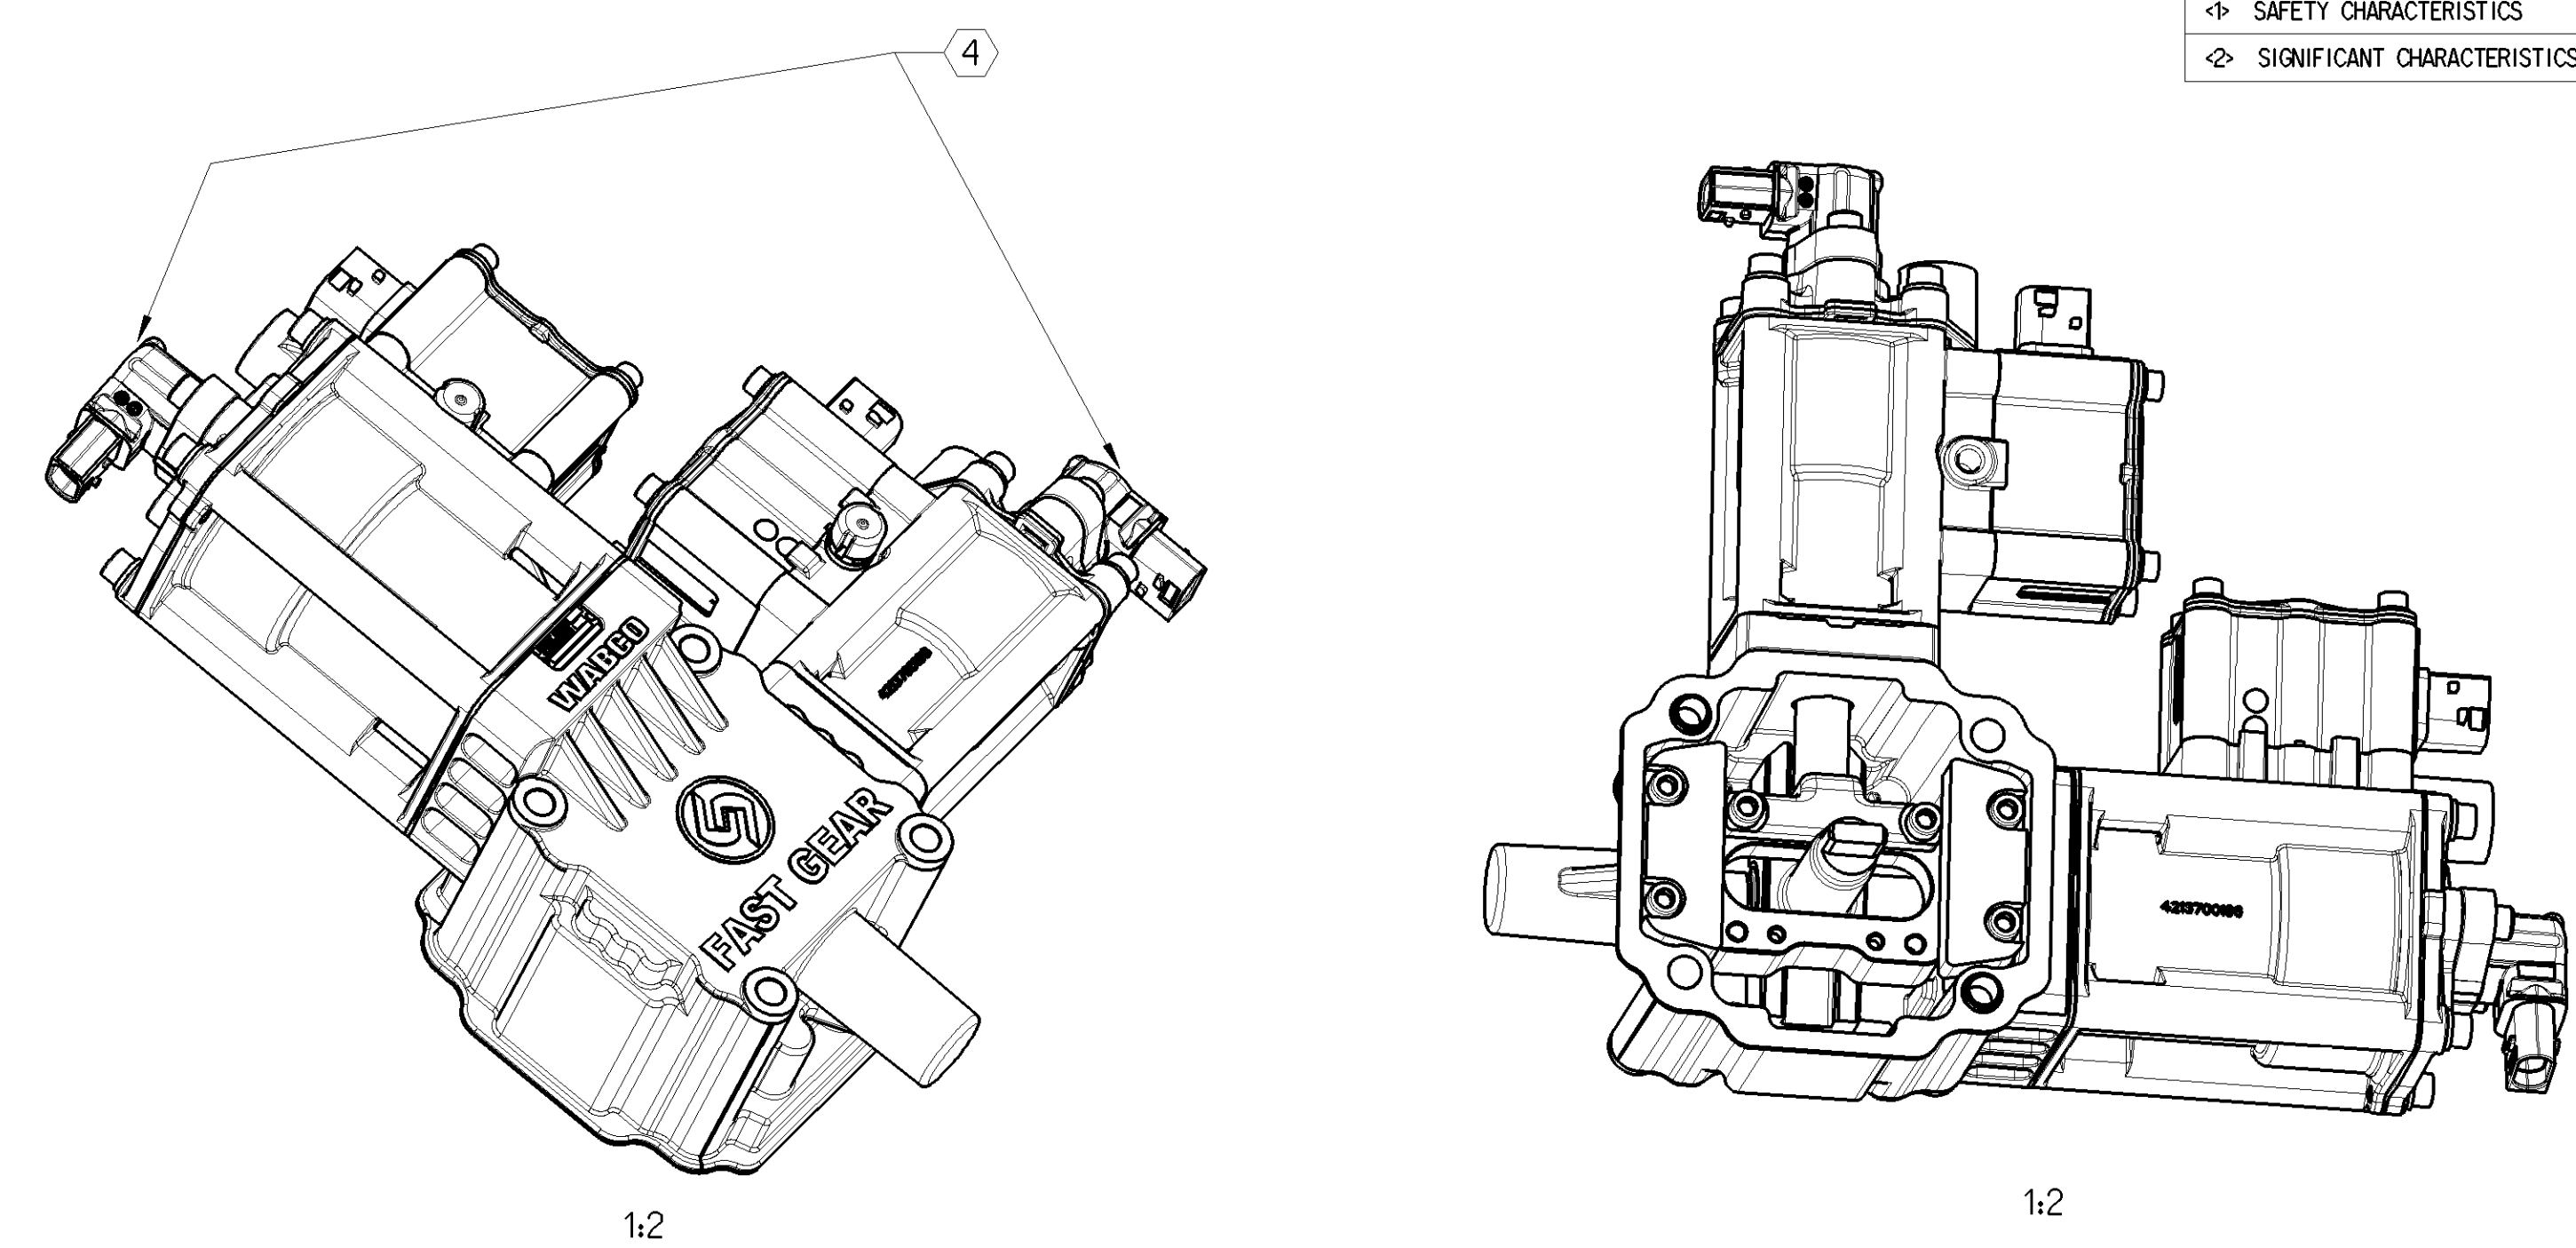


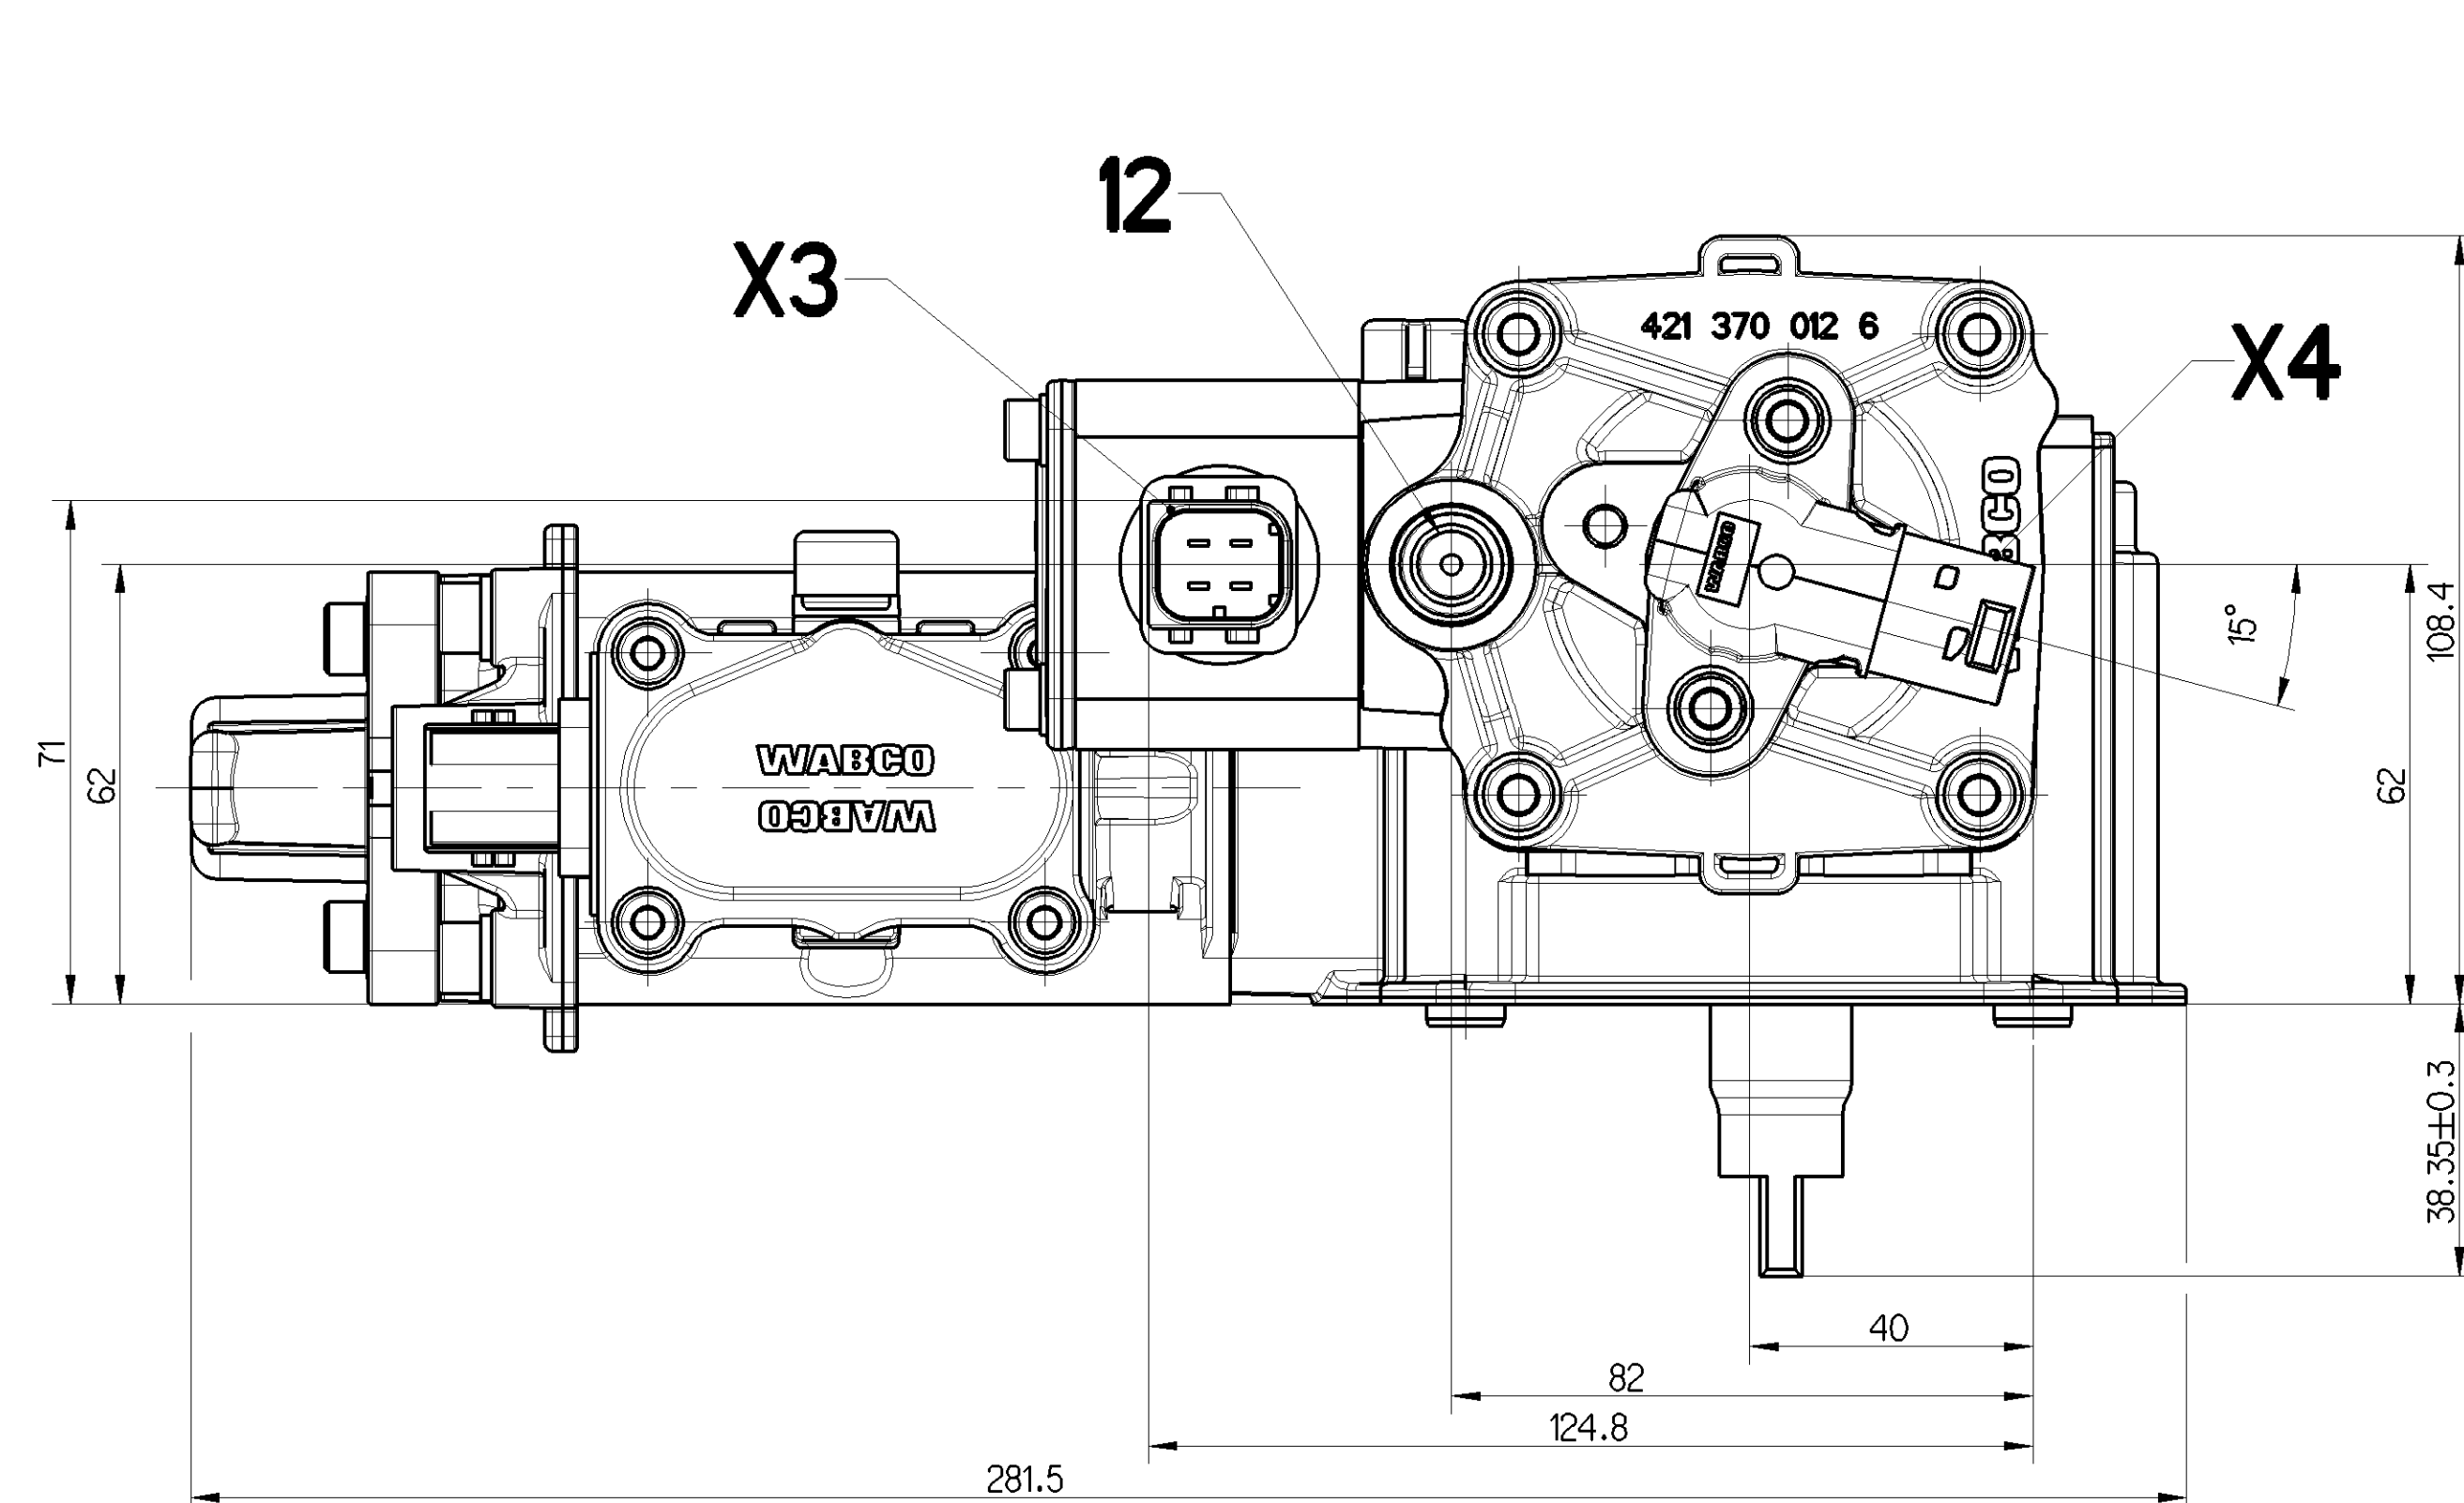

- | | |
|---------|--|
| 11 | SUPPLY SELECTION CYLINDER
M16x1.5 JED388-0 (VOSS-230) |
| 12 | SUPPLY GEARSHIFT CYLINDER
M16x1.5 JED388-0 (VOSS-230) |
| X1 | CONNECTOR SOLENOID VALES SELECTION (VSE1, VSE2)
TYCO HDSCS 4x2,8 CODING A, C-114-18739-1 (connector: 1-1418390-1) |
| X2 | CONNECTOR DISTANCE SENSOR SELECTION (DSSE)
TYCO/AMP, HDSCS, 1.5 K, 1-1418448-1 |
| X3 | CONNECTOR SOLENOID VALES GEARSHIFT (VG1, VG2)
TYCO HDSCS 4x2,8 CODING A, C-114-18739-1 (connector: 1-1418390-1) |
| X4 | CONNECTOR DISTANCE SENSOR GEARSHIFT (DSG)
TYCO/AMP, HDSCS, 1.5 K, 1-1418448-1 |
| 31 / 32 | EXHAUST (NOT PROTECTAED AGAINST EXTERNAL FORCES (e.g. FOOTSTEP) |

WORKING PRESSURE : $P_e = 6 \dots 8.5 \text{ bar (G)}$

WORKING MEDIUM : AIR

PERMISSABLE CONTAMINATION OF AIR SEE PRODUCT SPECIFICATION

OVERPRESSURE INSIDE GEARBOX : MAX. 0.1 bar

VOLTAGE : $24 \overset{+8}{-4} \text{ V DC}$



THERMAL RANGE OF APPLICATION : $-30^\circ \dots +120^\circ$

DEGREE OF PROTECTION : IP 6K9K

DIRECTION OF GEARBOX INPUT SHAFT : 

FURTHER INFORMATION SEE PRODUCT SPECIFICATION

7 NO PAINT ALLOWED (BOX MARKED)

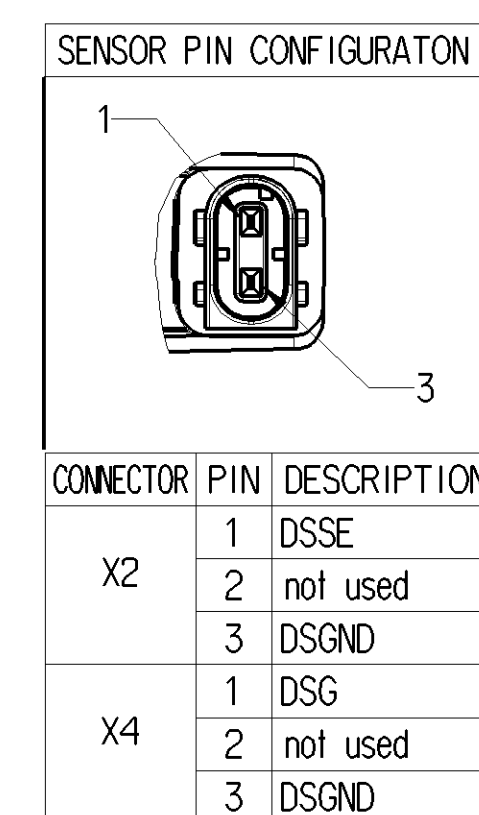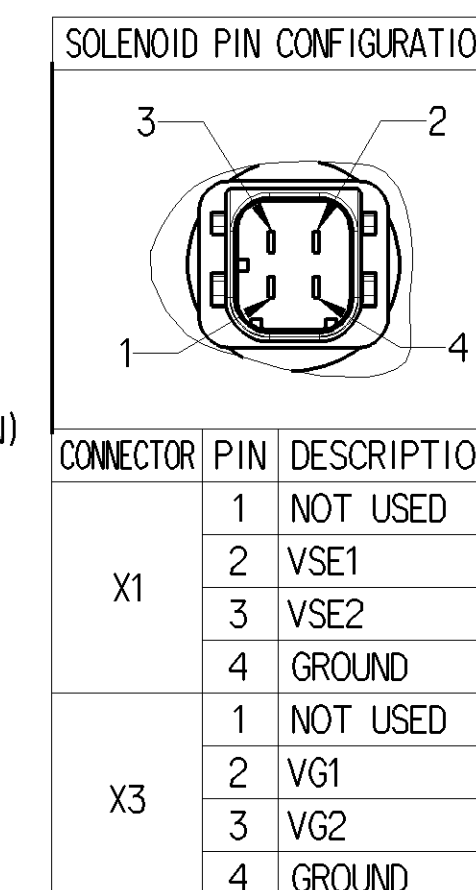[illegible]