


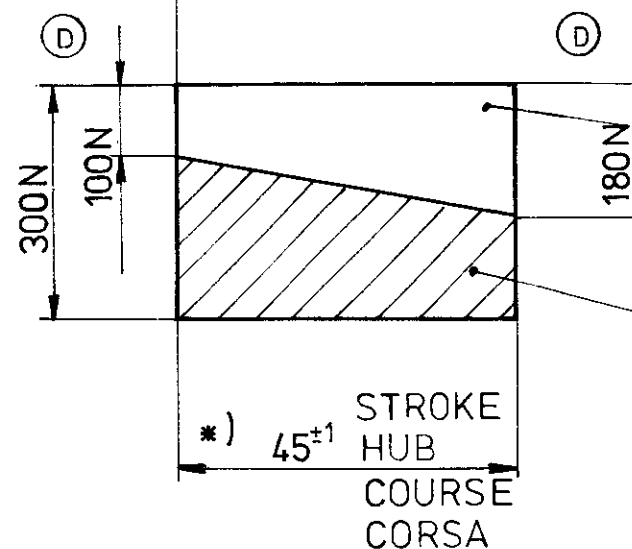

MEDIUM	AIR
MEDIUM	LUFT
FLUIDE	AIR
FLUIDO	ARIA

ENERGY DIAGRAM AT
ARBEITSDIAGRAMM BEI 4,5 bar
DIAGRAMME D'ENERGIE A
DIAGRAMMA DI ENERGIA A

DISPERSION
STREUBEREICH $\pm 10 \%$ STROKE
DISPERSION HUB
DISPERSIONE $\phi 30 \times 45$ COURSE
CORSA

JED - 438

INDICATION FOR INSTALLATION: STOP MUST BE ARRANGED OUTSIDE OF THE CYLIND.
EINBAUHIWEIS: ANSCHLAG MUSS AUSSERHALB DES ZYLINDERS LIEGEN
INDICATION POUR INSTALLATION: BUTEE DOIT ETRE DISPOSEE AU DEHORS DU CYLIND
INDICAZIONE DI MONTAGGIO: ARRESTO DEVE ESSERE DISPOSTO FUORI DEL CILINDRO

V V V V V	56905 ^{1/2} 1x	(J)	94-11-10	DATE	SIGNATURE	WABCO CYLINDER CYLINDRE CILINDRO ARBEITSZYLLINDER
	46790	(H)	90-08-03	DRAWN	75-01-06 RISTIC	
	30766	(G)	84-10-19	CHECKED	75-01-06 <i>My lines</i>	
	24924	(F)	80-08-26	DESIGNED	75-02-14 <i>for me</i>	
	16682	(E)	77-04-28	DATE		
N-ORIG.	3x	(D)	75-01-06			
ID.		(C)		MASS	SCALE	IDENTIFICATION
		(B)		0,5 kg	1:1	421 410 054 0
		(A)				1/1
	CHANGE NO.	LETT	DATE	REPLACEMENT FOR	SIZE	TR
	ORIG. GL. NRV.	70-03-18		A 3	140	
				CODE FOR FUNCTION	CODE FOR SPEED	CODE FOR DISPLACEMENT
				23	24	605