

TECHNICAL DATA
 TECHNISCHE DATEN
 CARACTÉRISTIQUES TECHNIQUES
 CARATTERISTICHE TECNICHE

WORKING PRESSURE
 BETRIEBSDRUCK P_e : MAX 8 bar
 PRESSION D'UTILISATION
 PRESSIONE DI ESERCIZIO


THERMAL RANGE OF APPLICATION
 THERMISCHER ANWENDUNGSBEREICH: -20°C BIS +80°C
 GAMME D'APPLICATION THERMIQUE
 CAMPO DI APPLICAZIONE TERMICA

MEDIUM: AIR
 MEDIUM: LUFT
 FLUIDE: AIR
 FLUIDO: ARIA

SPRING DIAGRAM
 FEDERDIAGRAMM
 DIAGRAMME DE RESSORT
 DIAGRAMMA DI MOLLA

ENERGY DIAGRAM AT 4.5 bar
 ARBEITSDIAGRAMM BEI 4.5 bar
 DIAGRAMME D'ENERGIE A
 DIAGRAMMA DI ENERGIA A

DISPERSION: ±10 %
 STREUBEREICH: ±10 %
 DISPERSION
 DISPERSIONE

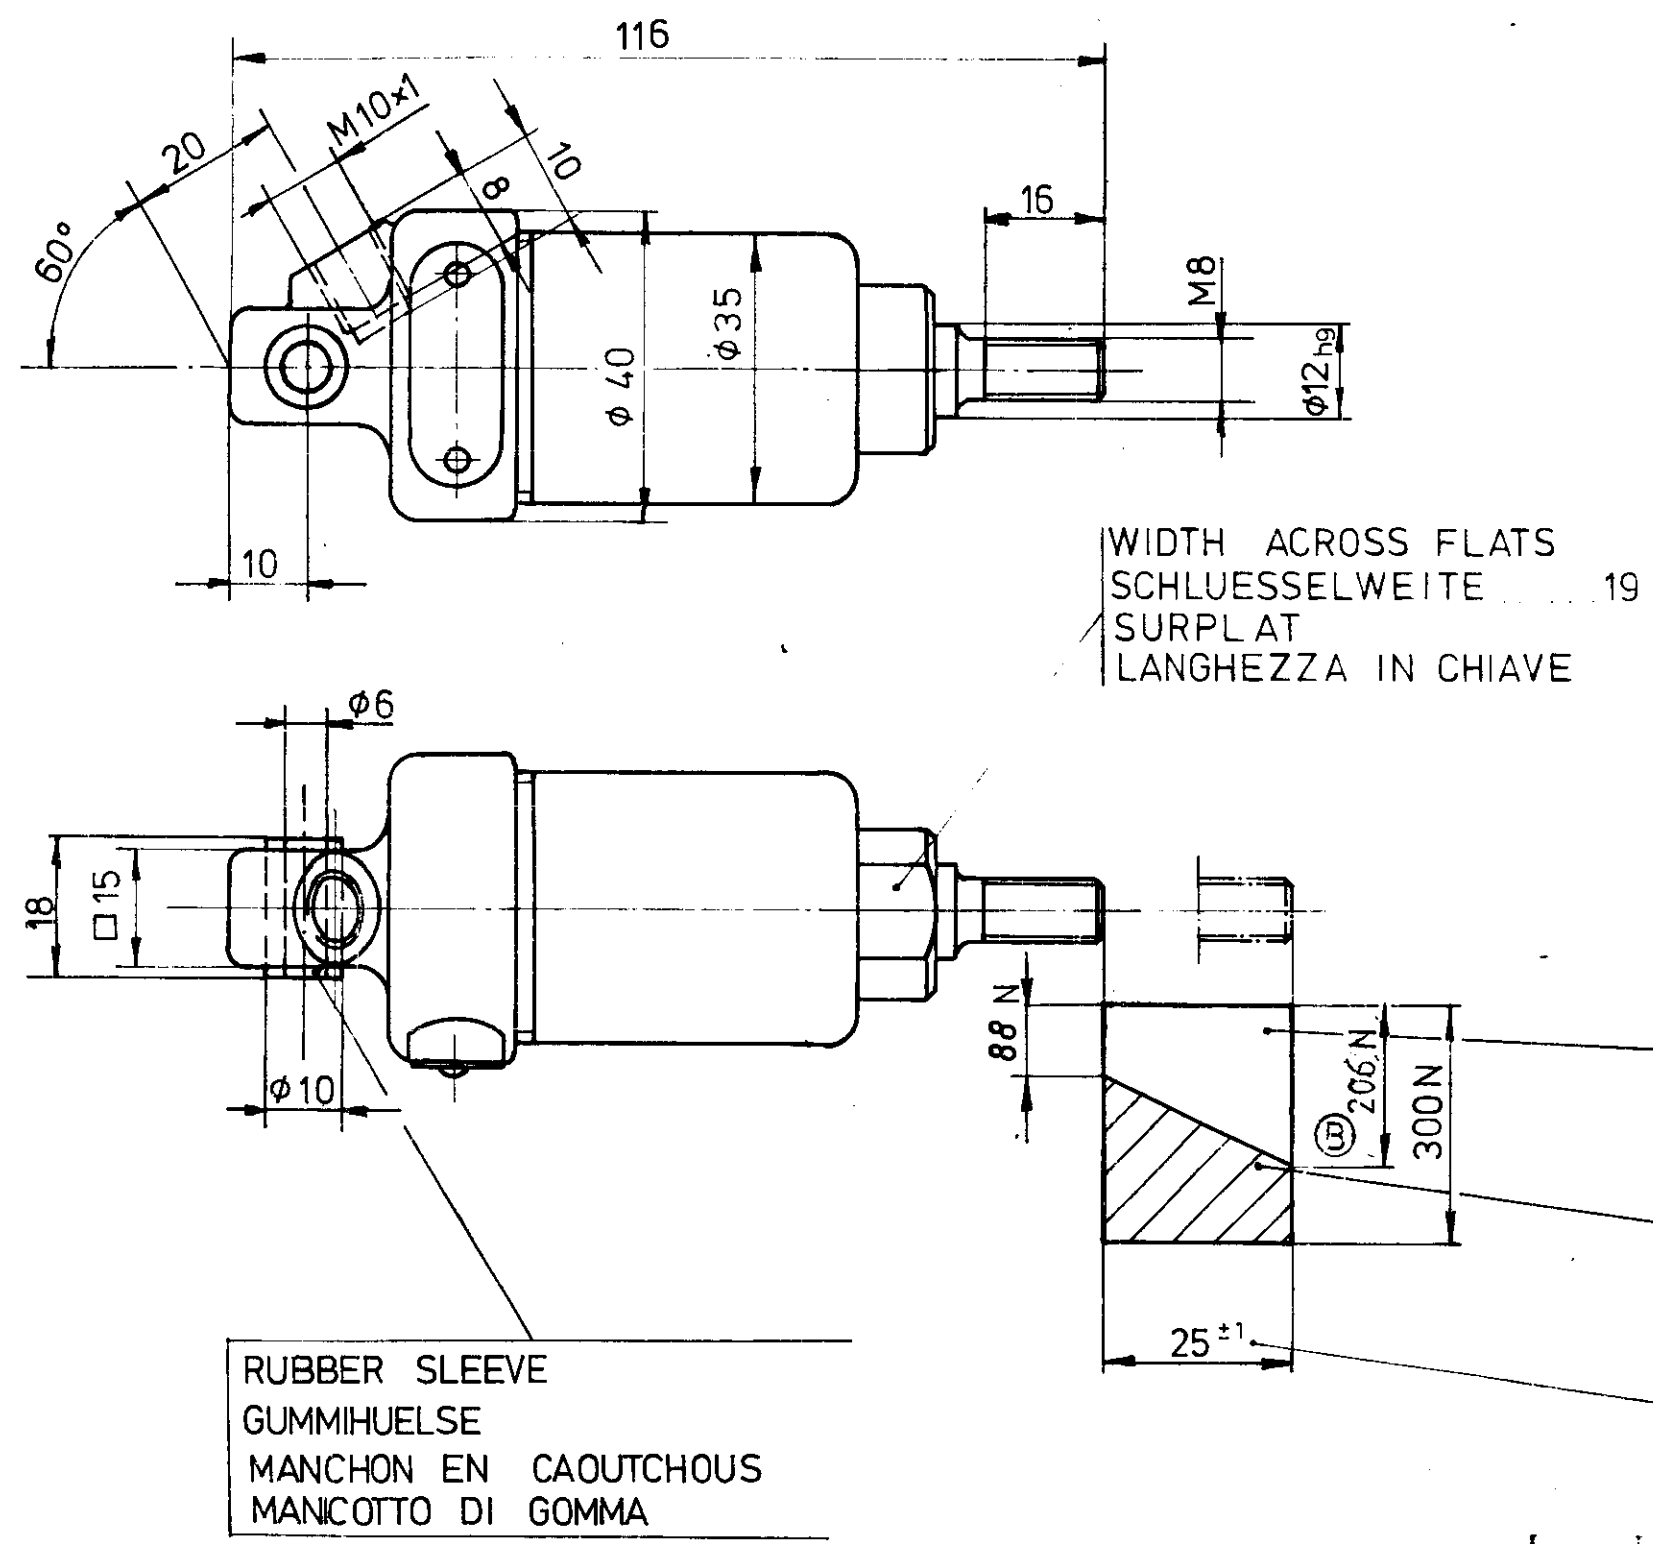

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS					FORCE POWER PRESSURE ETC.			
	1)	≤ 50	≤ 180	≤ 400	> 400		1)	2)	3)
I		0.5	1	1.5	2				
II	X	1	2	3	4				
III		2	3.5	5	6.5				

1- CHECK OFF WHERE APPLICABLE

79-07-03		79-07-03		79-07-10		81-04-01		80-09-30	
26116		24948		A 3		140		605	
CYLINDER		CYLINDRE		CILINDRO		ARBEITSZYLINDER		φ 30 x 25	
421 410 072 0									

Tous droits de propriété industrielle réservés. All rights reserved in the event of the grant of a patent or the registration of a utility model or design. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.