


54	H11	+0.190
14	H11	+0.110

*) INDICATION FOR INSTALLATION : STOP MUST BE ARRANGED OUTSIDE OF THE CYLIND.
 EINBAUHINWEIS: ANSCHLAG MUSS AUSSERHALB DES ZYLINDERS LIEGEN
 INDICATION POUR INSTALLATION BUTEE DOIT ETRE DISPOSEE AU DEHORS DU CYLIND.
 INDICAZIONE DI MONTAGGIO: ARRESTO DEVE ESSERE DISPOSTO FUORI DEL CILINDRO

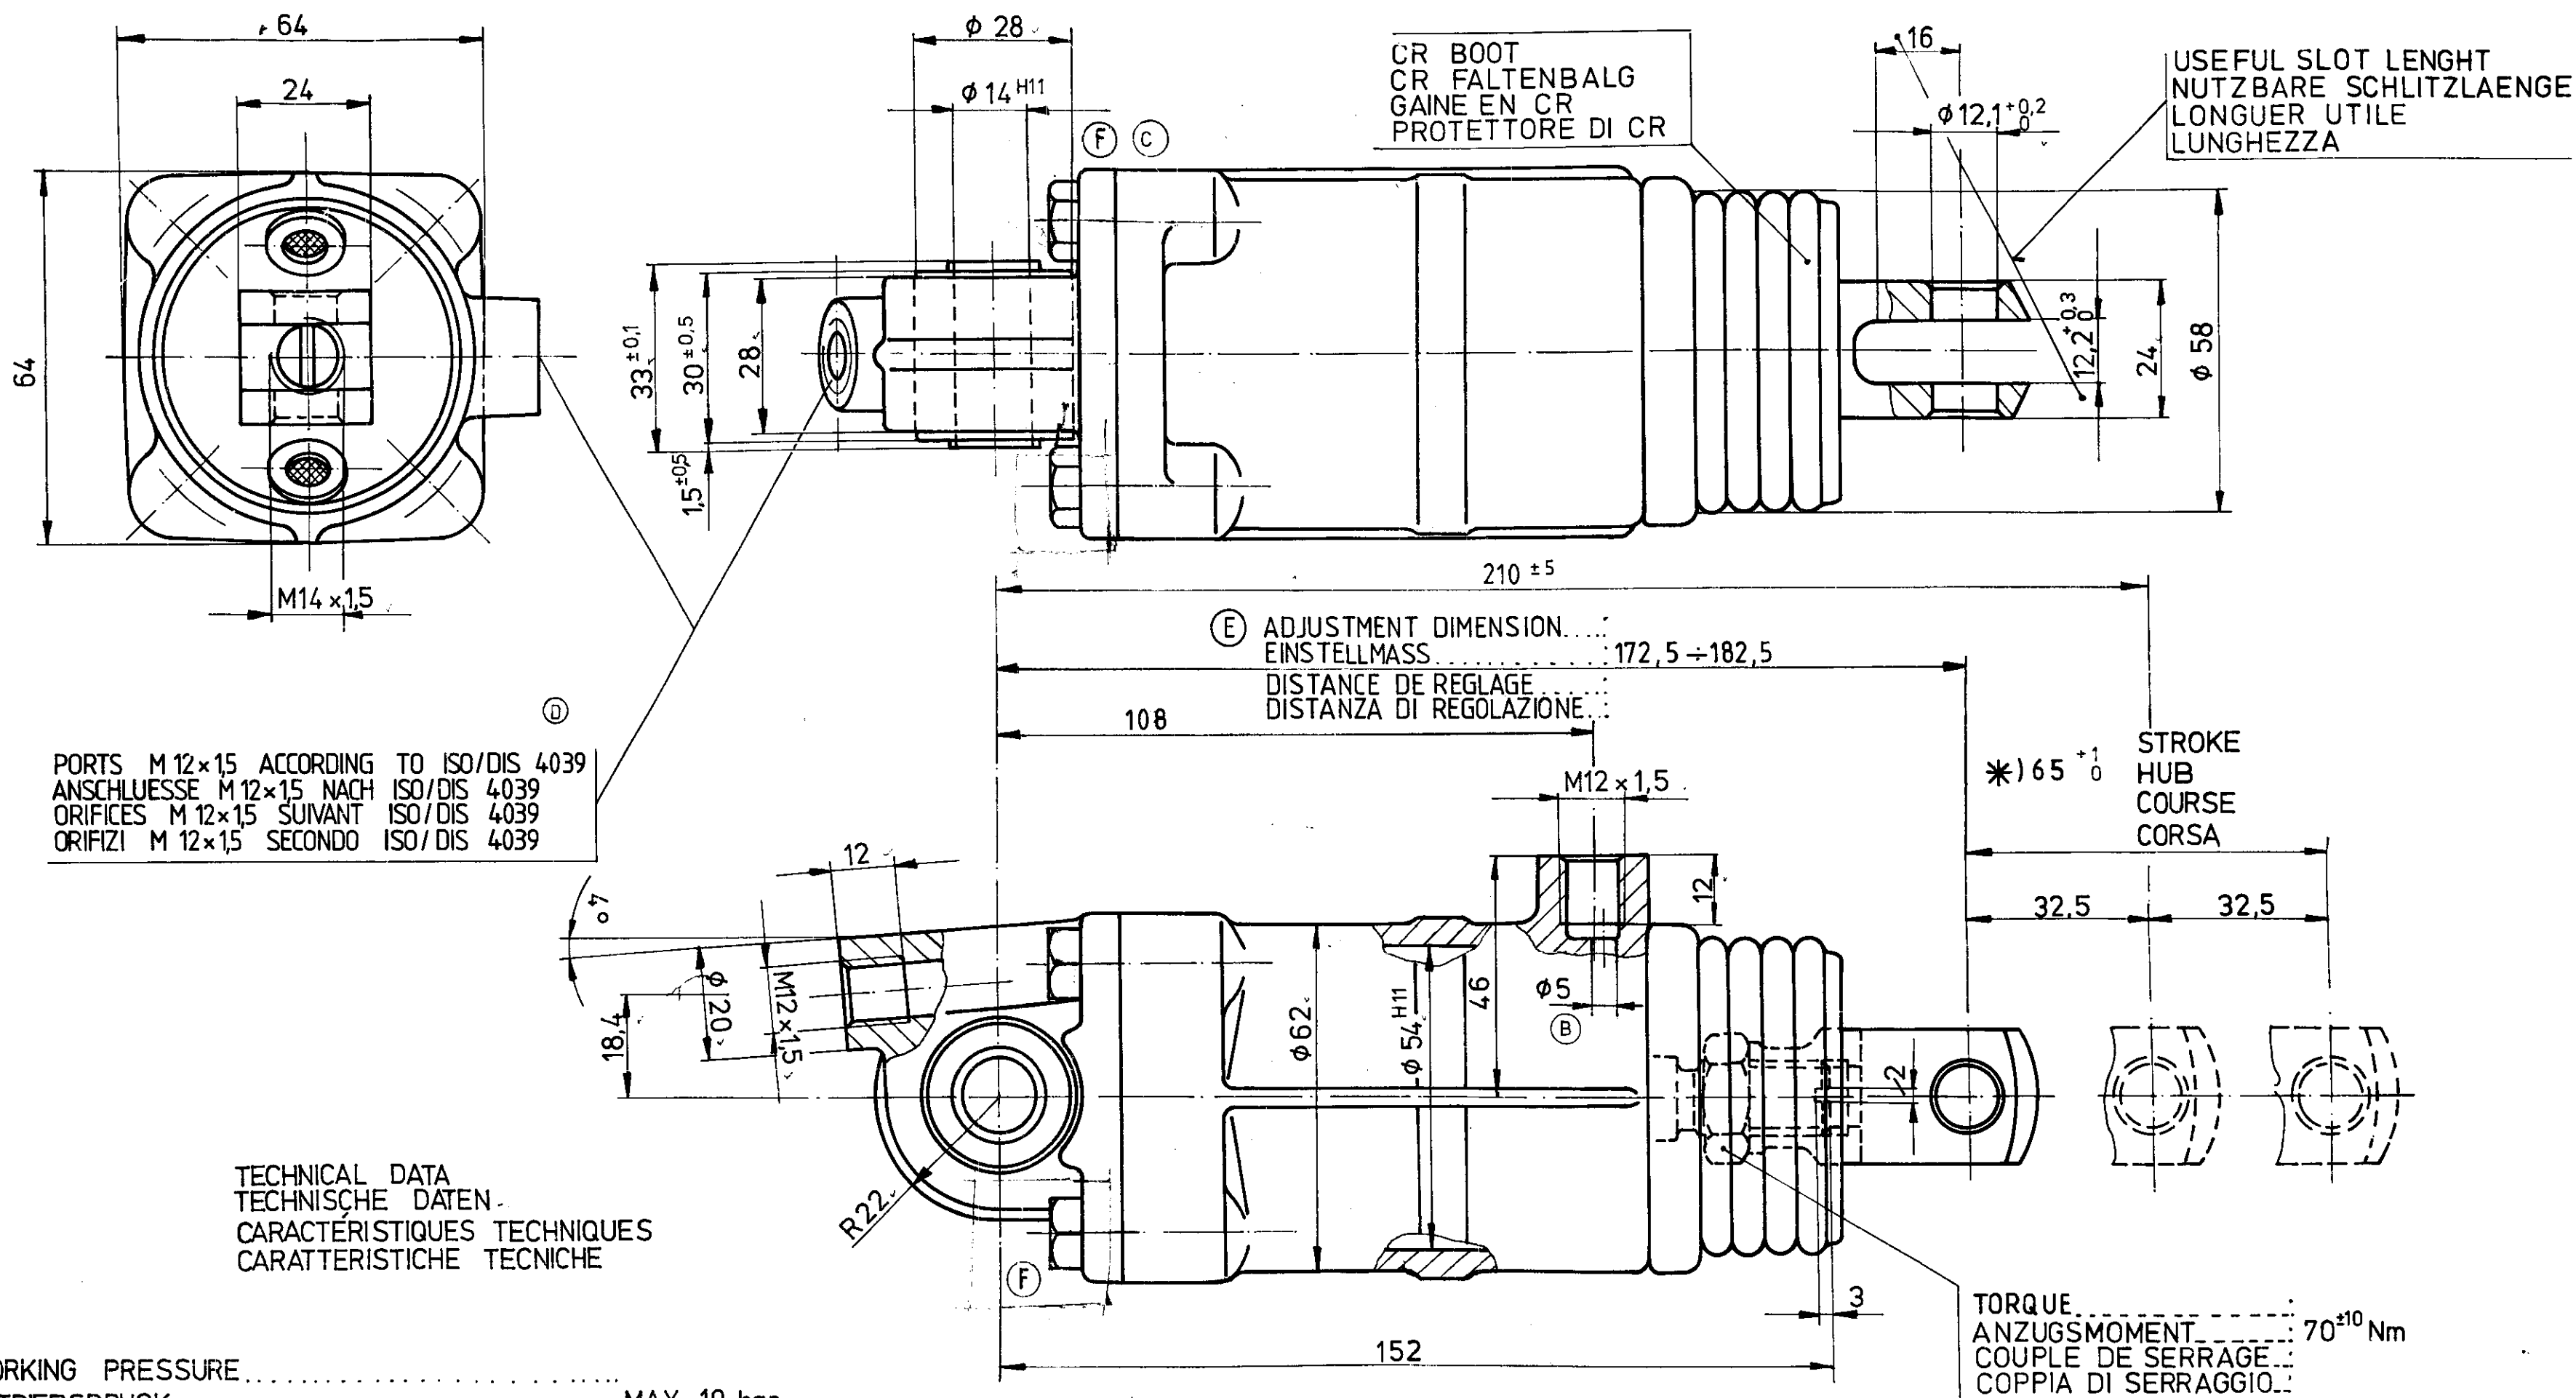

All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.
 Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

		DATE		SIGNATURE	
		74. 11. 27		HILGRAF	
29 38 4		83-03-21		2 POSITION CYLINDER	
20 57 8		79-03-02		CYLINDRE A DEUX POSITIONS	
12 25 1		77-12-16		CILINDRO A DUE POSIZIONI	
12 49 5		77-09-02		2- STELLUNGSZYLINDER	
16 78 7		77-03-02			
CHANGE NO		DATE		IDENTIFICATION CODE	
1		76-10-25		422 010 010 0	
REPLACEMENT FOR		SIZE		CODE FOR FUNCTION	
		A 2		CODE FOR SHAPE	
		140		CODE FOR DOCUMENT	
				605	