
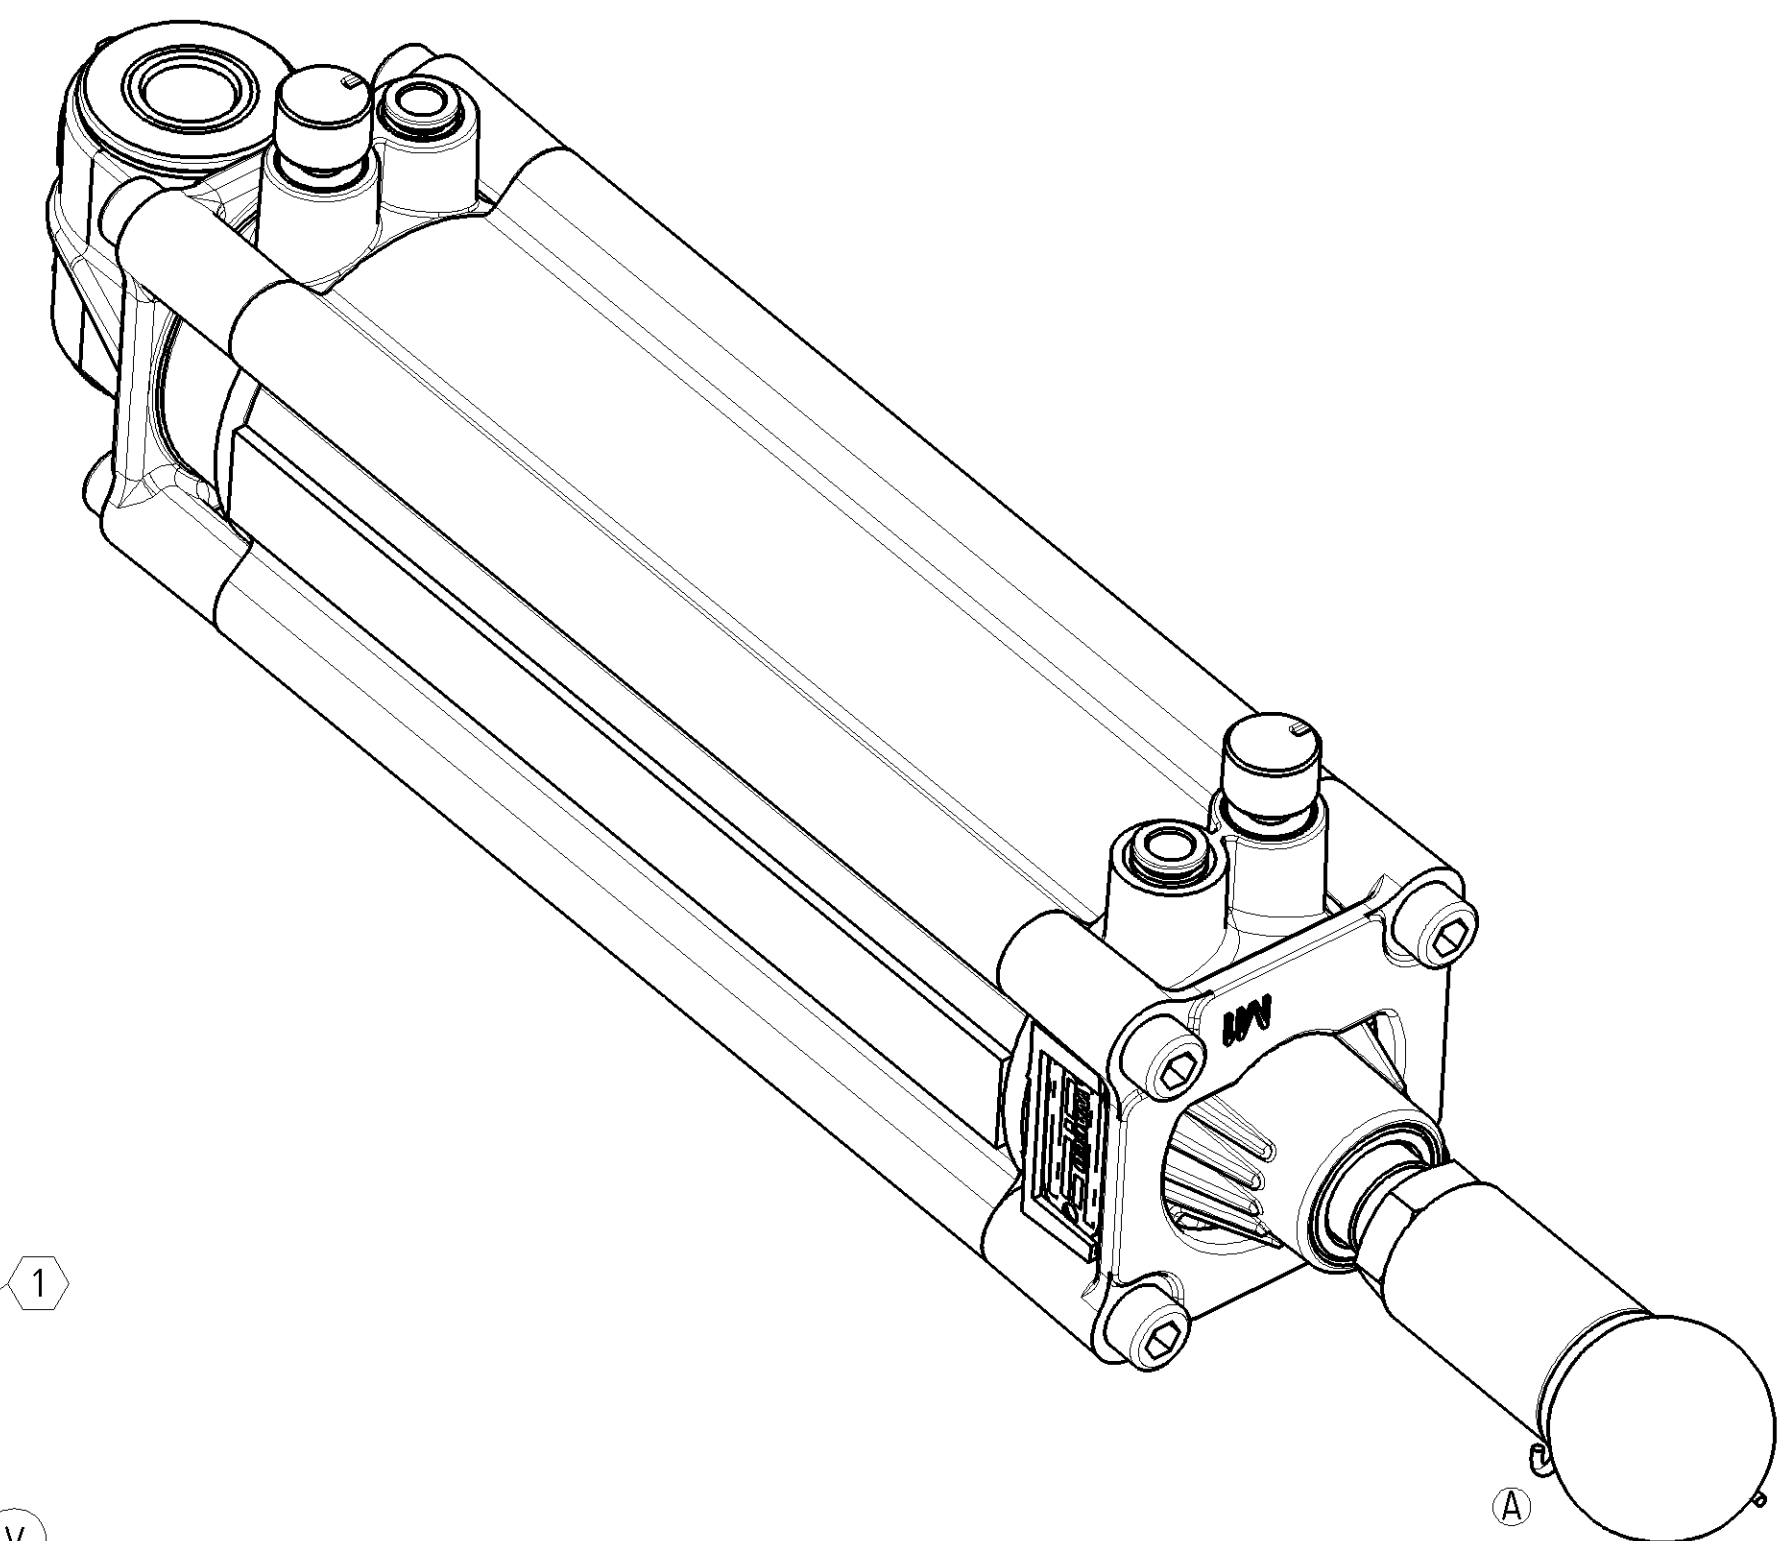
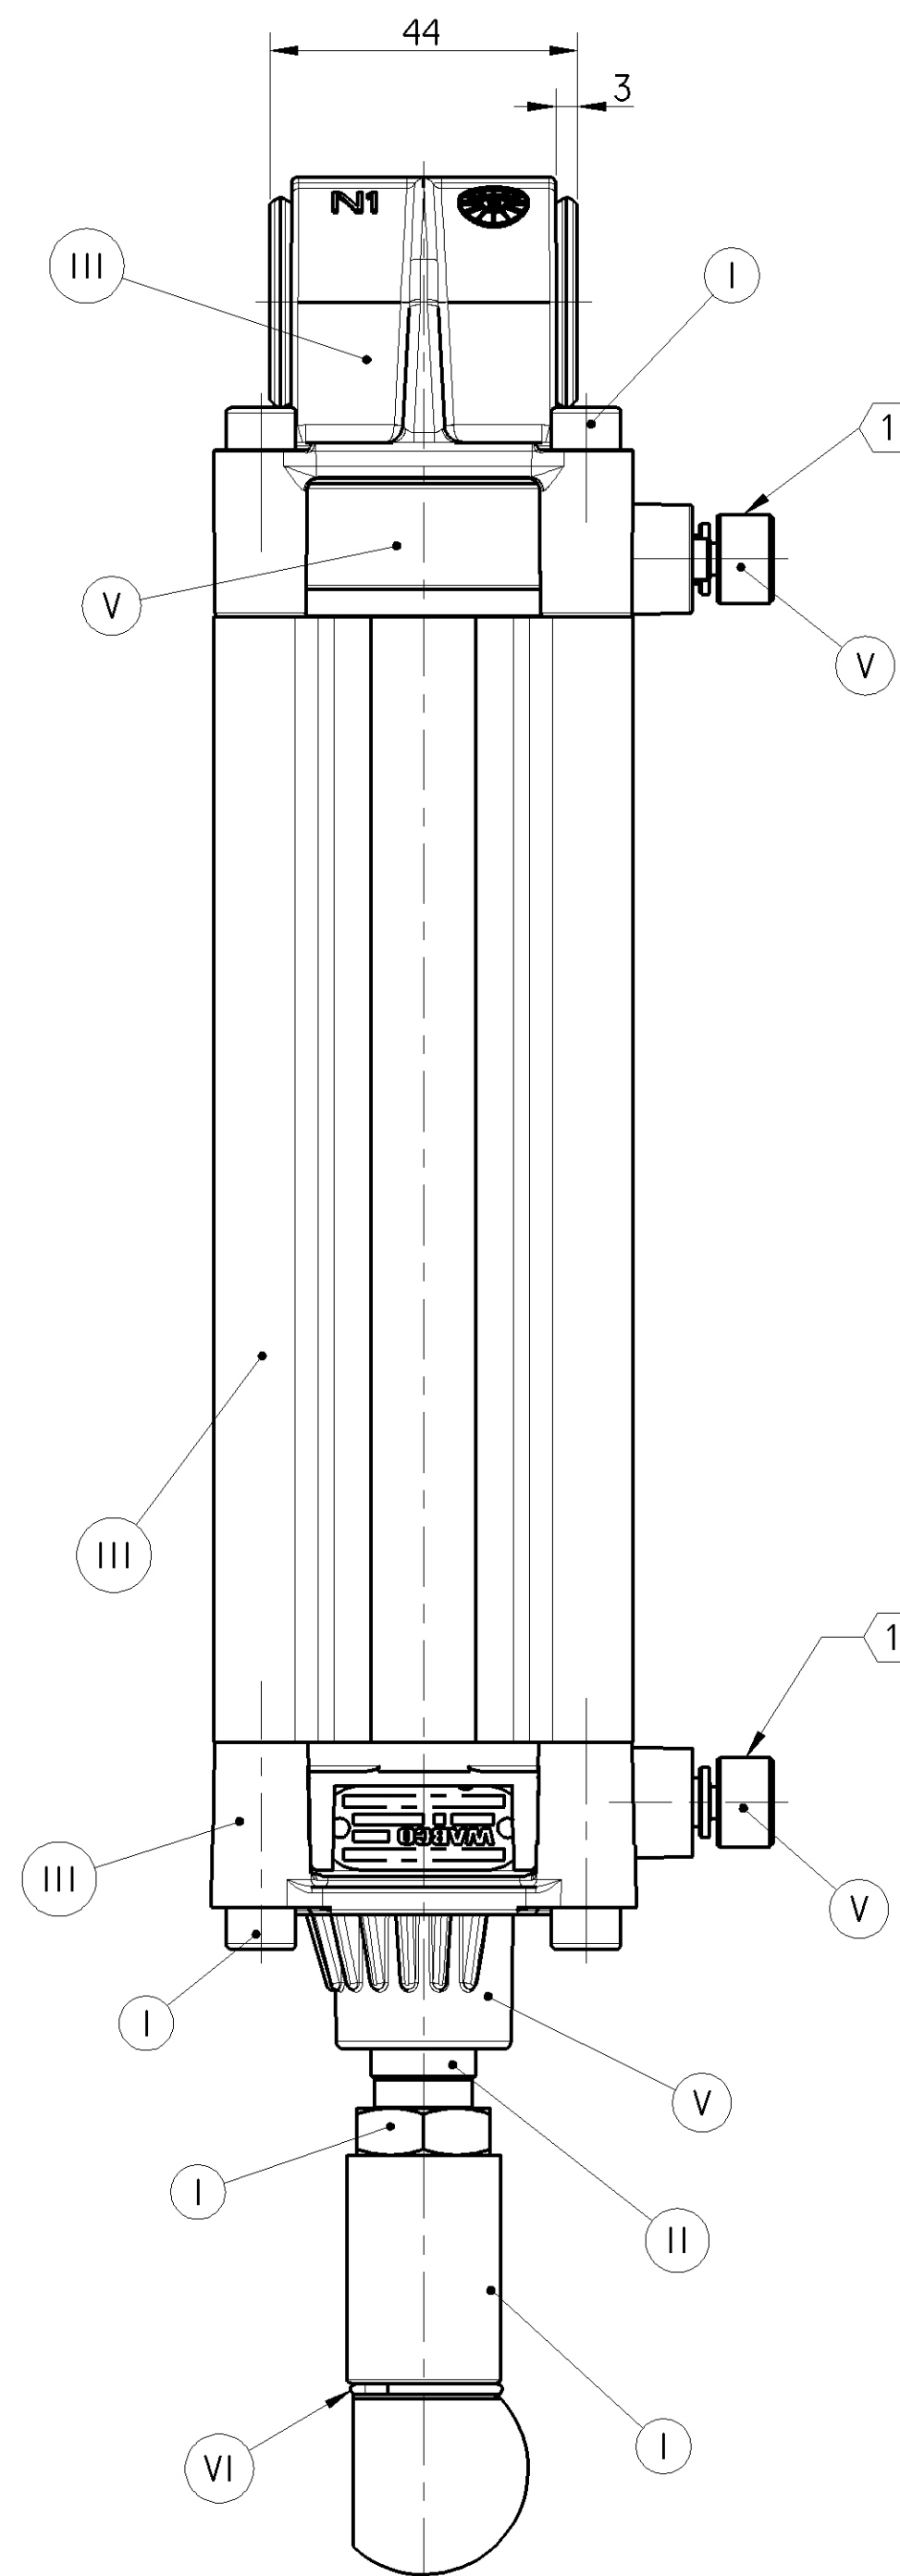
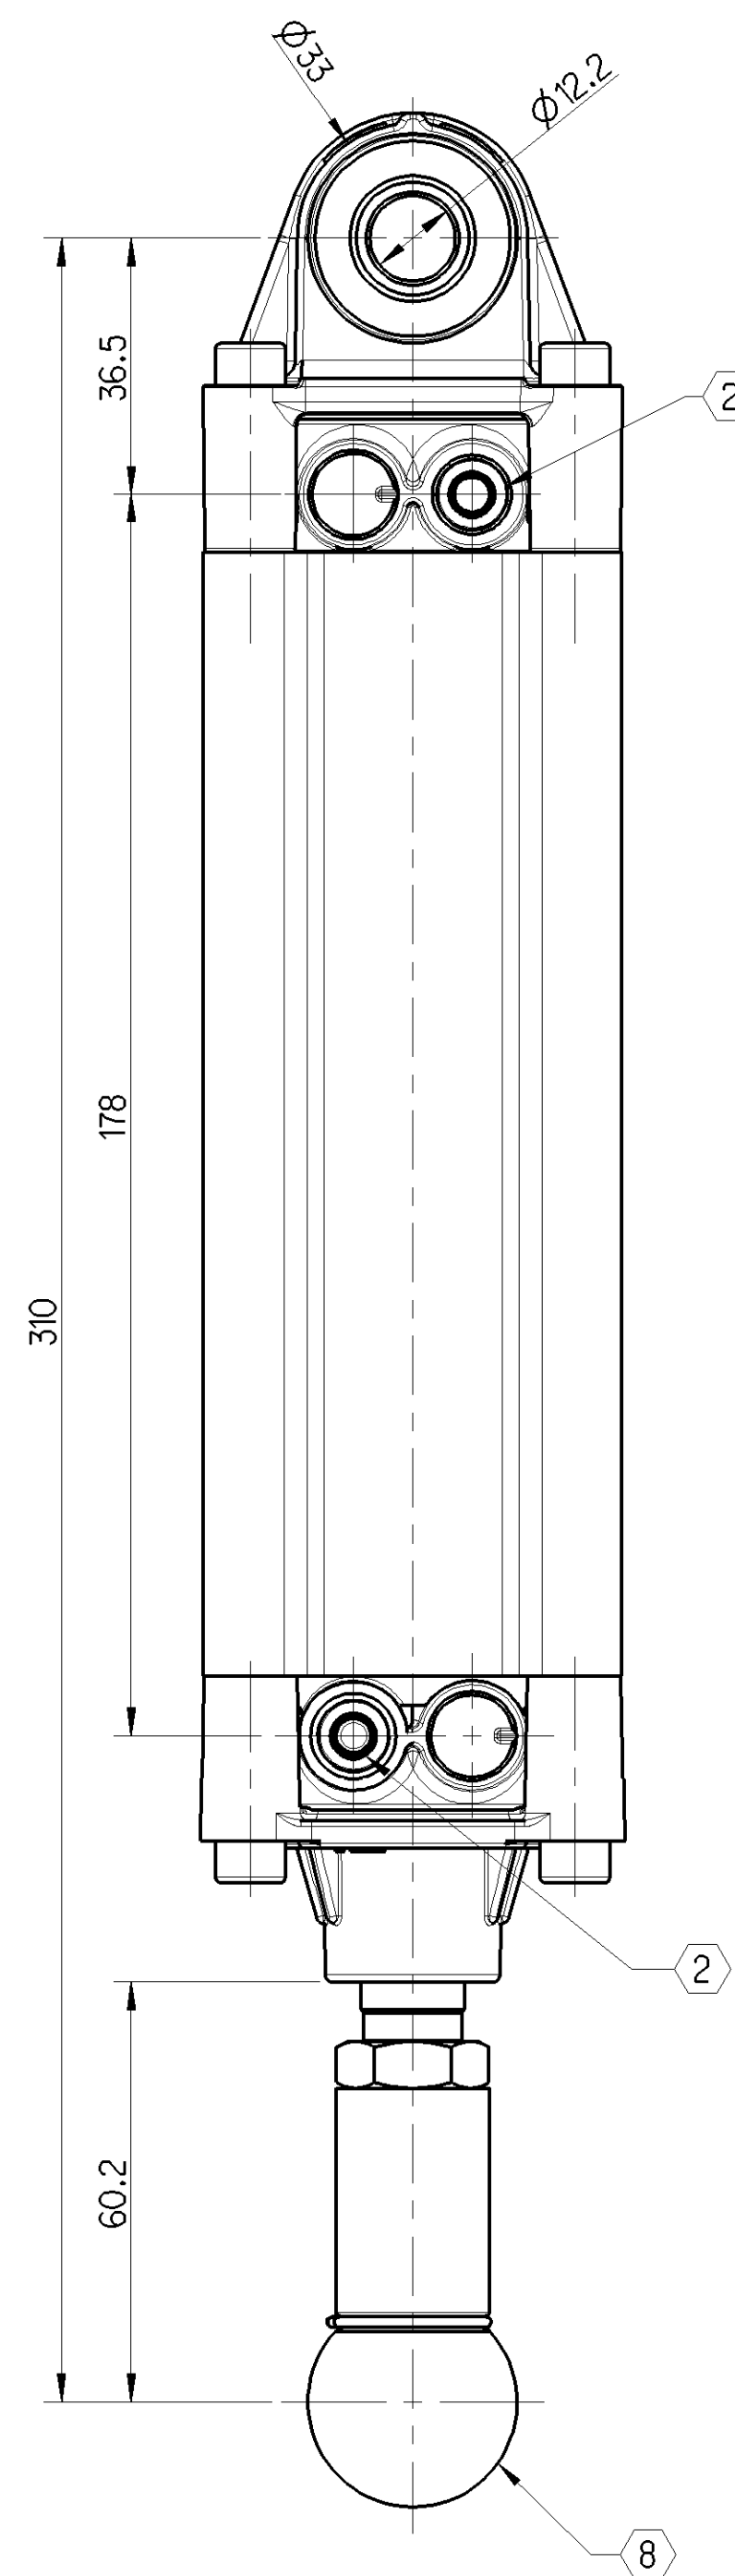
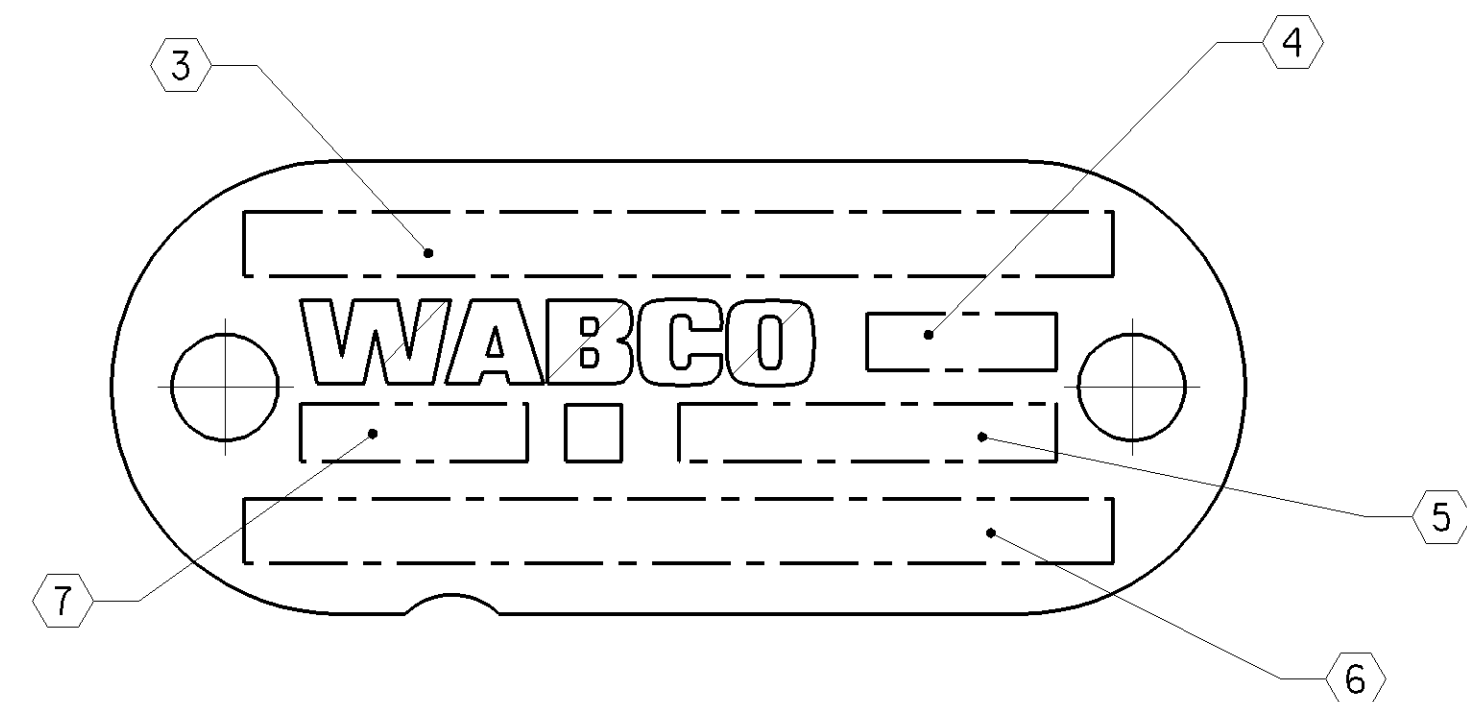
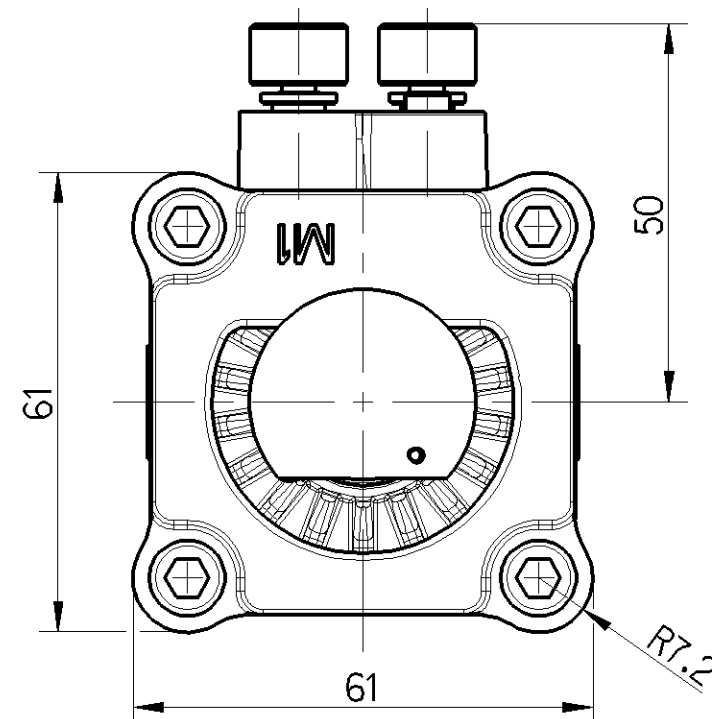


<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0

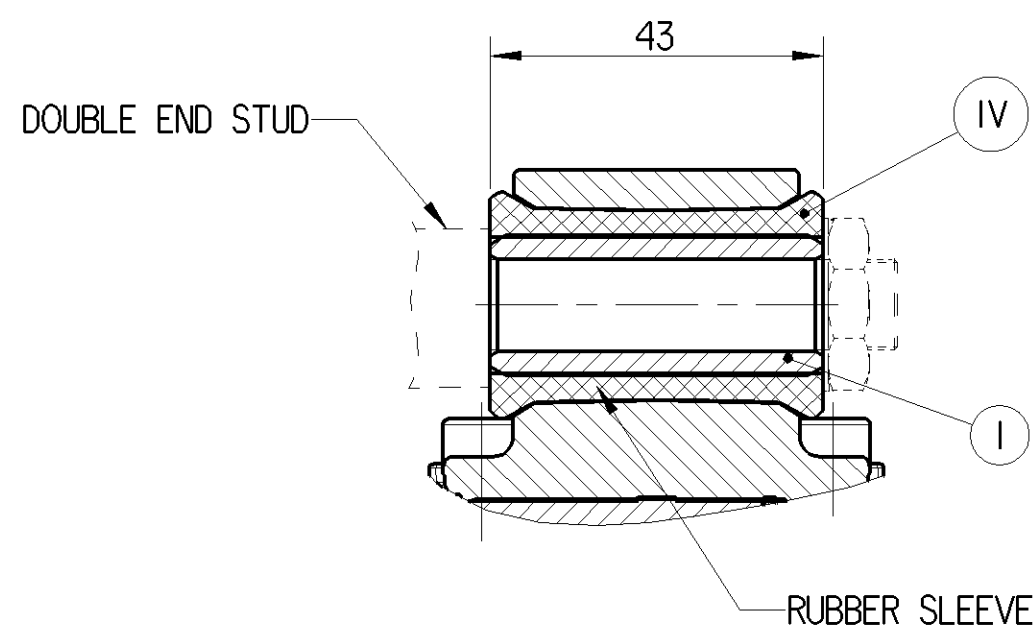

PNEUMATIC SYMBOL

TEST INSTRUCTION No.: TI 422 814 002 0

- ① FLOW CONTROL VALVE TORQUE 0.7 Nm MAX
- ② PUSH TO FIT CONNECTOR SUITABLE FOR Ø6mm TUBE
- ③ CUSTOMER NUMBER TO BE MARKED HERE
- ④ MANUFACTURING COUNTRY CODE TO BE MARKED HERE
- ⑤ SERIAL No. TO BE MARKED HERE
- ⑥ WABCO IDENTIFICATION No. TO BE MARKED HERE
- ⑦ WEEK AND YEAR OF MANUFACTURE TO BE PUNCHED HERE LETTER SIZE FOR MARKING 1.6 mm
- ⑧ BALL SOCKET B-19 AS PER DIN 71805 WITH SNAP RING

VI	JED-378-4
V	PLASTIC
IV	RUBBER
III	JED-007-3
II	JED-870
I	JED-256-5
PART CODE	SURFACE PROTECTION

General Specification: JED-334-1, Size ISO 14405 LP					Copyright WABCO®		WABCO			
Further Technical Data: 422 814 002 0					Date		Signature			
Doc. Code: 035		Sheet: 1 To 6			2018-10-29		Kankaraj C		DOOR CYLINDER (140 x Ø50)	
General Tolerances JED-261					Checked		2018-10-29			
Range of Nominal Dimensions (± mm)					Export		Ragnunah L			
Murgon S										
Class 1)					Mass		Material No.		Date of first issue: 2017-12-08	
Fine					1.4 kg		1:1 Scale		Doc-Code	
Medium					KG		1:1 Scale		Language	
Coarse					Size		2:1		Sheet	
					CAD System		422 814 003 0		005 EN 1/1	
Tapped Holes Acc.					A 1		CREO		Ech-Nr.	
1) Tolerance Class Applied Crossmarked							Revision		Tech. Resp.	
							177916		1 A	
							5600		Replacement for	
									-	