



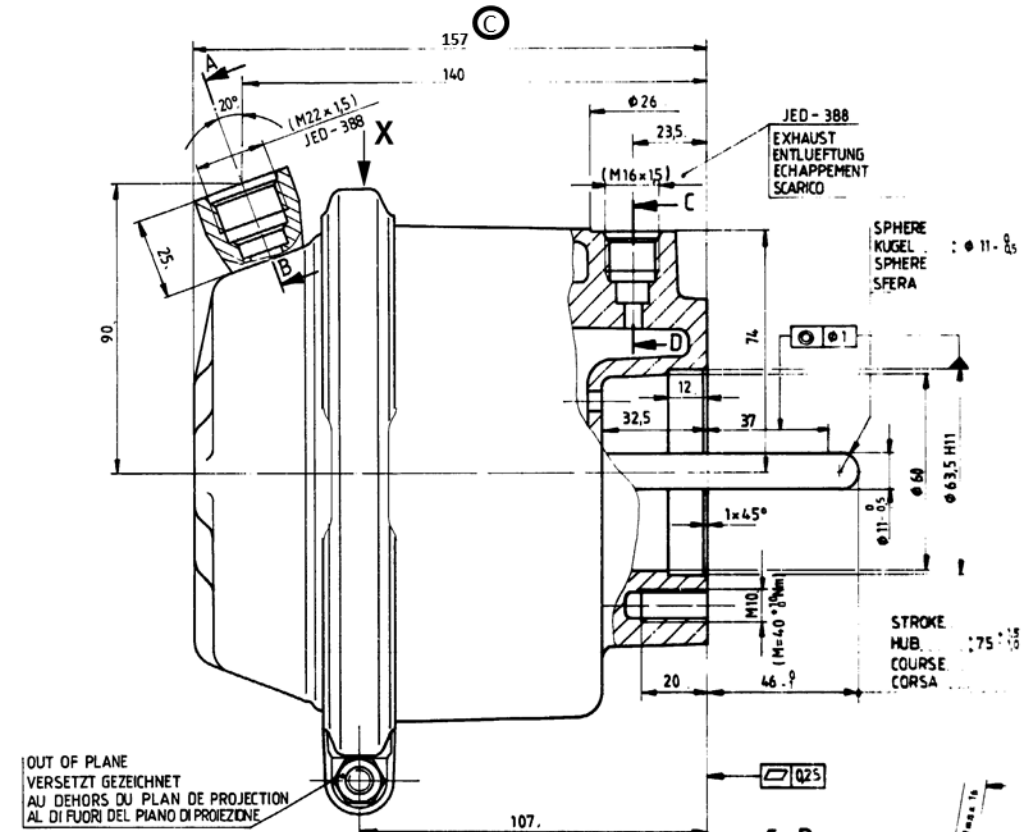


OUT OF PLANE
VERSETZT GEZEICHNET
AU DEHORS DU PLAN DE PROJECTION
AL DI FUORI DEL PIANO DI PROIEZIONE

A-B

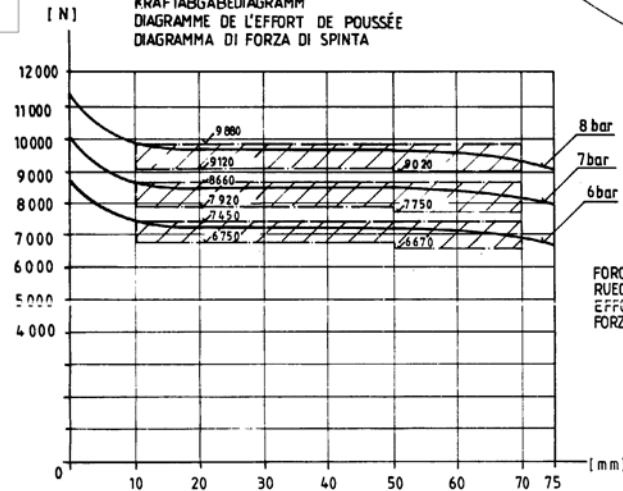

FORCE OF RETURN SPRING 200⁺⁴⁵₀ N
RUECKSTELLFEDERKRAFT
EFFORT DU RESSORT DE RAPPEL
FORZA DELLA MOLLA DI RITORNO

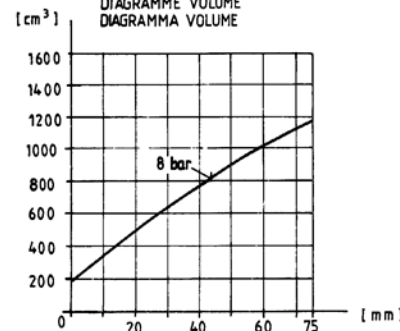

DEAD VOLUME
TOTVOLUME BEI 0 bar : $V_n = 72 \text{ [cm}^3 \text{]}$
VOLUME MORT
SPAZIO NOCIVO



WORKING PRESSURE.....
BETRIEBSDRUCK.....: $p_e = \text{MAX. } 10 \text{ bar}$
PRESSION D'UTILISATION...
PRESSIONE DI ESERCIZIO...

THERMAL RANGE OF APPLICATION.....
THERMISCHER ANWENDUNGSBEREICH.....- 40° C BIS + 80° C
GAMME D'APPLICATION THERMIQUE.....
CAMPO DI APPLICAZIONE TERMICA.....

MEDIUM, :	AIR
MEDIUM, :	DRUCKLUFT
FLUIDE, :	AIR
FLUIDO, :	ARIA

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

PERMISSIBLE ACCELERATION ON ALL SIDES ± 10 g
ZULAESSIGE BESCHLEUNIGUNG ALLSEITIG ± 10 g
ACCELERATION ADMISE A TOUS LES COTES ± 10 g
ACCELERAZIONE AMMISSIBILE IN TUTTE LE DIREZIONI ± 10 g

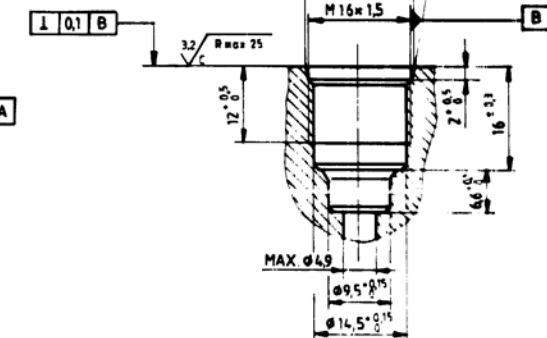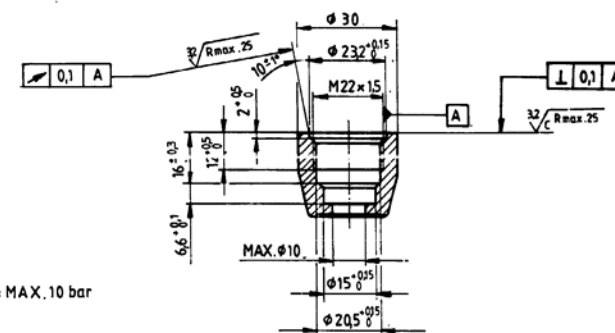

RESEARCH DESIGN