| SURFACE PROTECT./OBERFL. SCHUTZ | |
|---|---|
| I | JED-240 |
| II | JED-256 |
| | |

14H11 $^{+0.110}_{0}$

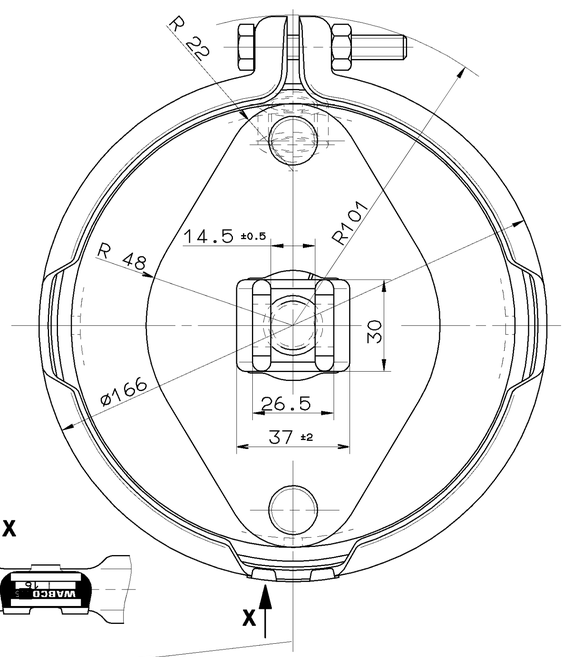


*) TO BE INSTALLED WITH LOWER BREATHER HOLE
IM EINBAUZUSTAND UNTERE ATMUNGSBOHRUNG ±30°
A MONTER AVEC LE RENIFLARD INFERIEUR
INSTALLAZIONE : CON IL FORO DI SFIATO INFERIORE

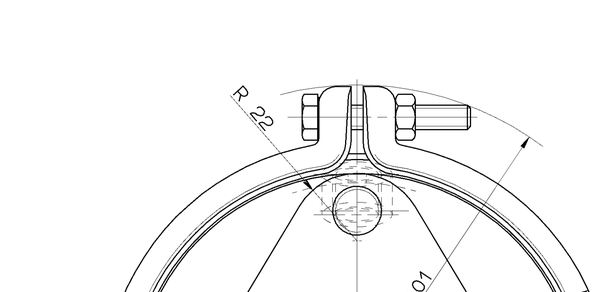


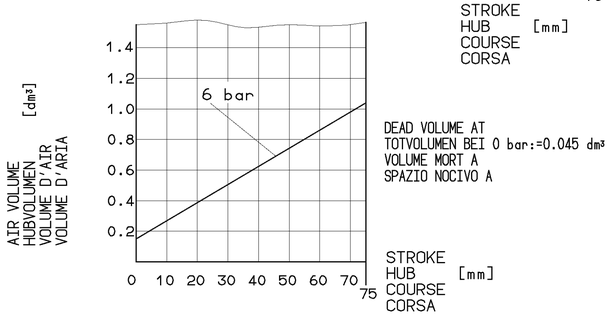


DEAD VOLUME AT
TOTVOLUMEN BEI 0 bar:=0.045 dm³
VOLUME MORT A
SPAZIO NOCIVO A

THEORETICAL SWIVEL POINT OF THE PUSH ROD
THEOR. SCHWENKPUNKT DER DRUCKSTANGE
CENTRE D'ARTICULATION THEORIQUE DE LA TIGE
CENTRO D'ARTICOLAZIONE TEORICO DELL ASTA

BREATHER HOLES
ATMUNGSBOHRUNGEN 4 × ø 6
TROUS DE RENIFLANT
FORI DI RESPIRATORE

TORQUE :
ANZUGSMOMENT :
COUPLE DE SERRAGE : 210 $^{0}_{-30}$ Nm
COPPIA DI SERRAGGIO:

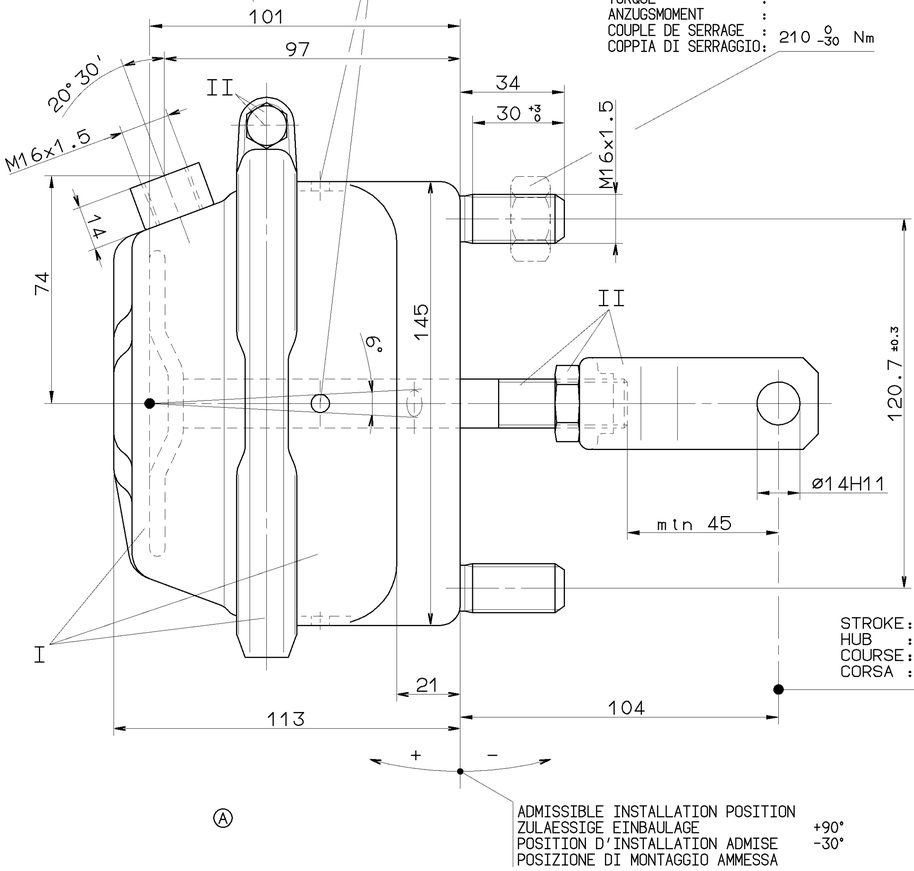


Ⓐ

ADMISSIBLE INSTALLATION POSITION
ZULAESSIGE EINBAULAGE +90°
POSITION D'INSTALLATION ADMISE -30°
POSIZIONE DI MONTAGGIO AMMESSA

FORCE OF RETURN SPRING :
RUECKSTELLKRAFT DER FEDER : 200 ±25 N
EFFORT DU RESSORT DE RAPPEL :
FORZA DELLA MOLLA RITORNO :

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH : -40 °C..+80 °C
GAMME D'APPLICATION THERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :

MEDIUM : AIR
MEDIUM : LUFT
FLUIDE : AIR
FLUIDO : ARIA

SERVICE PRESSURE :
BETRIEBSDRUCK : Pe max.= 10 bar
PRESSION DE SERVICE :
PRESSIONE DI ESERCIZIO :

(TEMPORARILY :
(KURZZEITIG : Pe max.= 13 bar)
(DE COURTE DUREE :
(BREVE TEMPO SOLO :



| GENERAL SPECIFICATION: JED-334 | | | | | | |
|---|---|---|---|---|---|---|
| FURTHER TECHNICAL DATA: | | | | | | |
| DOC. CODE: | | | SHEET: | | TO | |
| GENERAL TOLERANCES | | | | | | |
| CLASS 1) | RANGE OF NOMINAL DIMENSIONS ( ± mm ) ≤50 | > 50 ≤180 | >180 ≤400 | >400 | | |
| FINE | 0,5 | 1,0 | 1,5 | 2,0 | | |
| MEDIUM X | 1,0 | 2,0 | 3,0 | 4,0 | ± 3° | |
| COARSE | 2,0 | 3,5 | 5,0 | 6,5 | | |
| TAPPED HOLES ACC. ISO 4039 / JED-152 | | | | | | |
| 1) TOLERANCE CLASS APPLIED CROSSMARKED | | | | | | |

| 067575 | 1×A | 98-08-05 |
|---|---|---|
| DCN-NO. | REV. | DATE |

| CADAM-DRAWING COPYRIGHT | |
|---|---|
| DATE | SIGNATURE |
| DRAWN: 98-07-21 MUELLER | |
| CHECKED: | |
| STANDARDIZATION: | |

**WABCO**

BRAKE CHAMBER 16
MEMBRANZYLINDER
VASE A DIAPHRAGME
BRAKE CHAMBER

| MASS | SCALE | PRODUCT IDENTIFICATION NO. | DOC. CODE | SHEET |
|---|---|---|---|---|
| 2.7 KG | 1:1 | 423 104 634 0 | 605 | 1/1 |
| SIZE | T.R.I. | | | |
| A 1 | 185 | | SHAPE CODE | REPLACEMENT FOR |

100mm

EXPERT CODE 7 2 2

PRODUCT TYPE 0 0 X

1309/016/3/04.93
630/603

TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION OU COMMUNICATION DE SON CONTENU OU DE SES PARTIES NE SONT PAS AUTORISEES SANS NOTRE ACCORD EXPRES. TOUS DROITS RESERVES EN CAS DE DEPOT DE BREVET, DE MODELE D'UTILITE OU DE DESSIN DE MODELE.
NON È PERMESSO CONSEGNARE A TERZI O RIPRODURRE questo documento, né utilizzare il contenuto o renderlo noto ad altri senza nostra espressa autorizzazione. Tutti i diritti riservati in caso di concessione di brevetto, modello di utilità o disegno.
NICHT GESTATTET, DIESE UNTERLAGE AN DRITTE WEITERZUGEBEN, SIE VERVIELFAELTIGEN ODER INHALTLICH VERWERTEN BZW. ANDEREN ZUGAENGLICH MACHEN ODER SONSTWIE MITTEILEN OHNE DEREN AUSDRUECKLICHE GENEHMIGUNG. ALLE RECHTE FUER DEN FALL DER PATENTERTEILUNG ODER GEBRAUCHSMUSTER-EINTRAGUNG VORBEHALTEN.
THE CONTENTS OF THIS DOCUMENT MAY NOT BE COMMUNICATED TO THIRD PARTIES NOR REPRODUCED, NOR MAY ITS CONTENTS BE EXPLOITED OR MADE ACCESSIBLE TO OTHERS WITHOUT OUR EXPRESS AUTHORISATION. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN.
THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT