
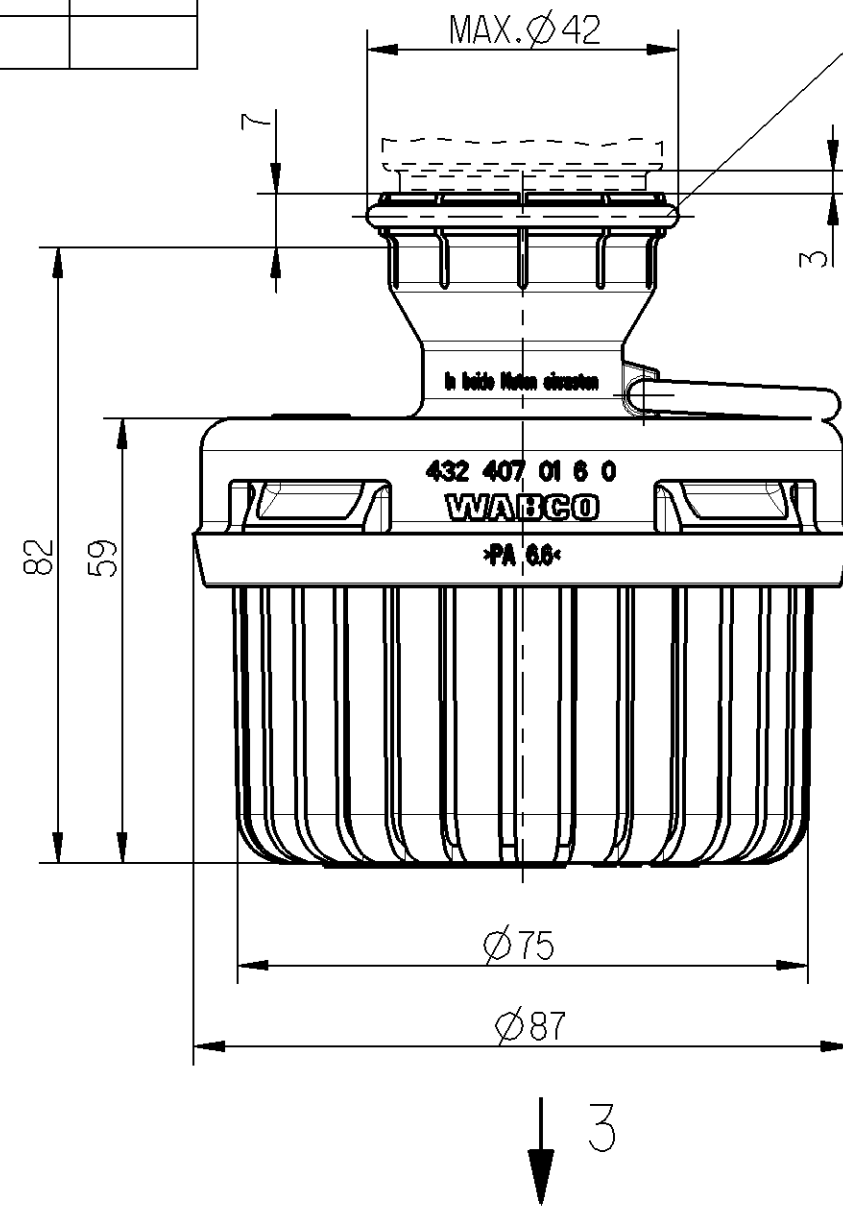


POS	MATERIAL MATERIAL MATERIAU MATERIALE	SURFACE PROTECTION OBERFLAECHENSCHUTZ PROTECTION SUPERFICIELLE PROTEZIONE SUPERFICIALE	CUSTOMER NO. KUNDEN- NR. k.Z. NO. CLIENT NO. CLIENTE	ZGS
1	JED-049M	JED-256		
2	JED-354-1	.		
3	JED-7080M			

REMOVE WHEN DISASSEMBLING
BEI DEMONTAGE ENTFERNEN
ENLEVER AU DEMONTAGE
RIMUOVI IN FASE DI SMONTAGGIO

INSTALLATION POSITION
EINBAULAGE
POSITION D'INSTALLATION
POSIZIONE DI MONTAGGIO

EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE
DEVICE DEVIATES MAX. 90° FROM VERTICAL)
ENTLUEFTUNG NACH UNTEN (MITTELACHSE DES GERAETES
MAX. 90° VON DER SENKRECHTEN ABWEICHEND)
ECHAPPEMENT VERS LE BAS (L'AXE MEDIAN
DE L'APPAREIL PAR RAPPORT A LA RAPPORT
A LA VERTICALE: 90° MAX.)
SCARICO VERSO IL BASSO (DEVIAZIONE ASSE
APPARECCHIO RISPETTO ALLA VERTICALE MAX 90°)

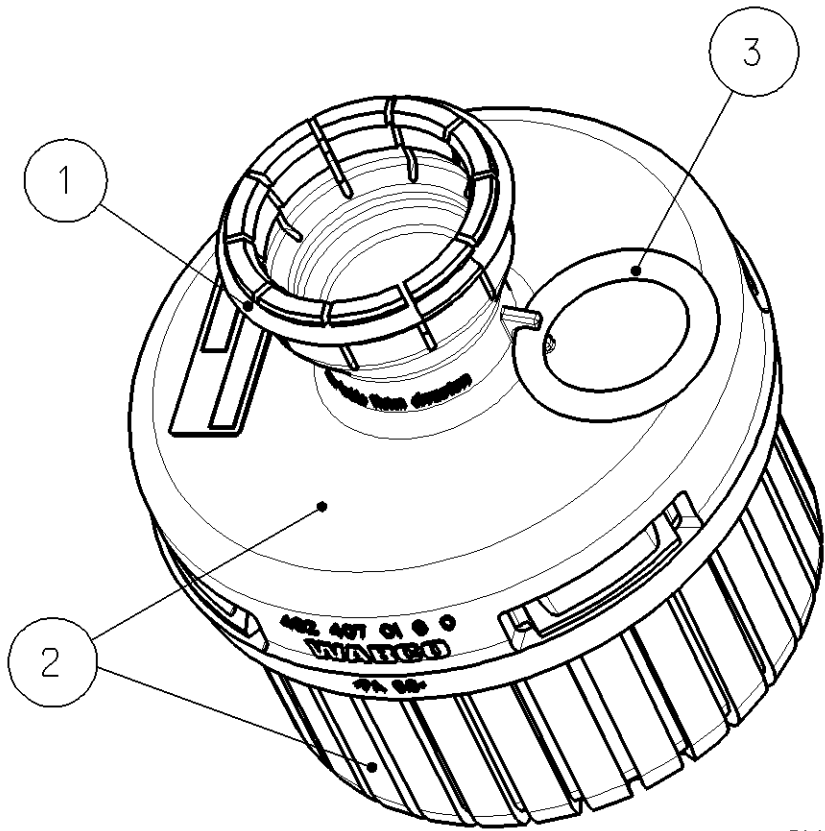

* CONDITIONS OF APPLICATION
EINSATZBEDINGUNGEN
CONDITIONS D'APPLICATION
CONDIZIONI DI APPLICAZIONE

SEE PRODUCT SPECIFICATION
SIEHE PRODUKTSPEZIFIKATION
VOIR SPECIFICATION DU PRODUIT
VEDERE SPECIFICA DI PRODOTTO


NOISE EMISSION
GERAEUSCHEMISSION
EMISSION DE BRUIT
EMISSIONE DI RUMORE

Ⓐ

< 69 db(A),(7.0 m)* bei 13 bar


MAX. WORKING PRESSURE OF DEVICE TO BE EXHAUSED
MAX. BETRIEBSDRUCK DES ZU ENTLUEFTENDEN GERAETES p_{e13} bar
PRESSIONE D UTILISATION MAX. DE L APPAREIL A ECHAPPER
PRESSIONE MAX. DI LAVORO DEL COMPONENTE DA SCARICARE

THERMAL RANGE OF APPLICATION :
 THERMISCHER ANWENDUNGSBEREICH: -40 °C...+80 °C
 GAMME D'APPLICATION THERMIQUE:
 CAMPO TERMICO D'APPLICAZIONE :

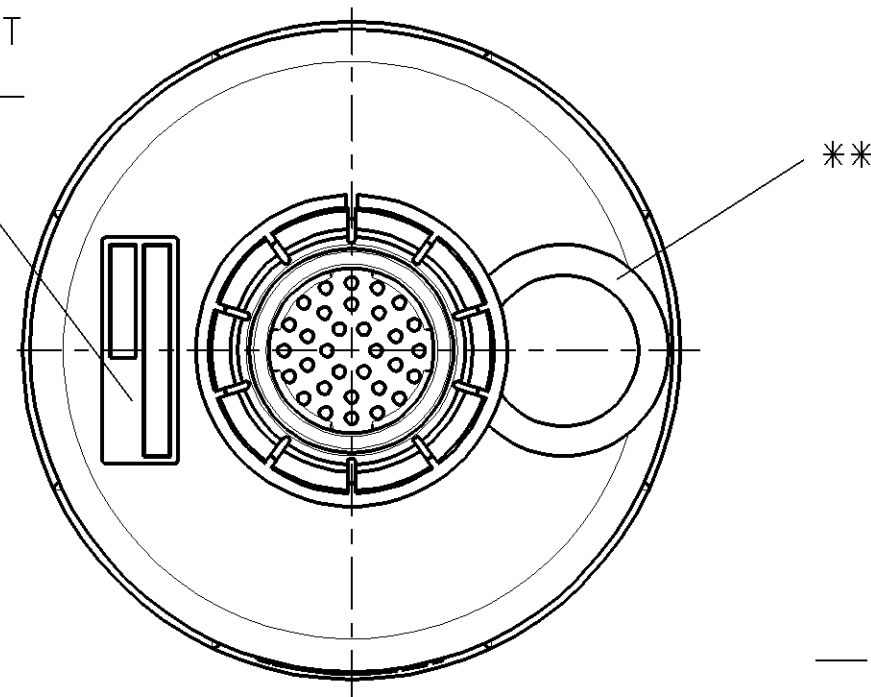

MEDIUM	AIR
MEDIUM	LUFT
FLUIDE	AIR
FLUIDO	ARIA

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

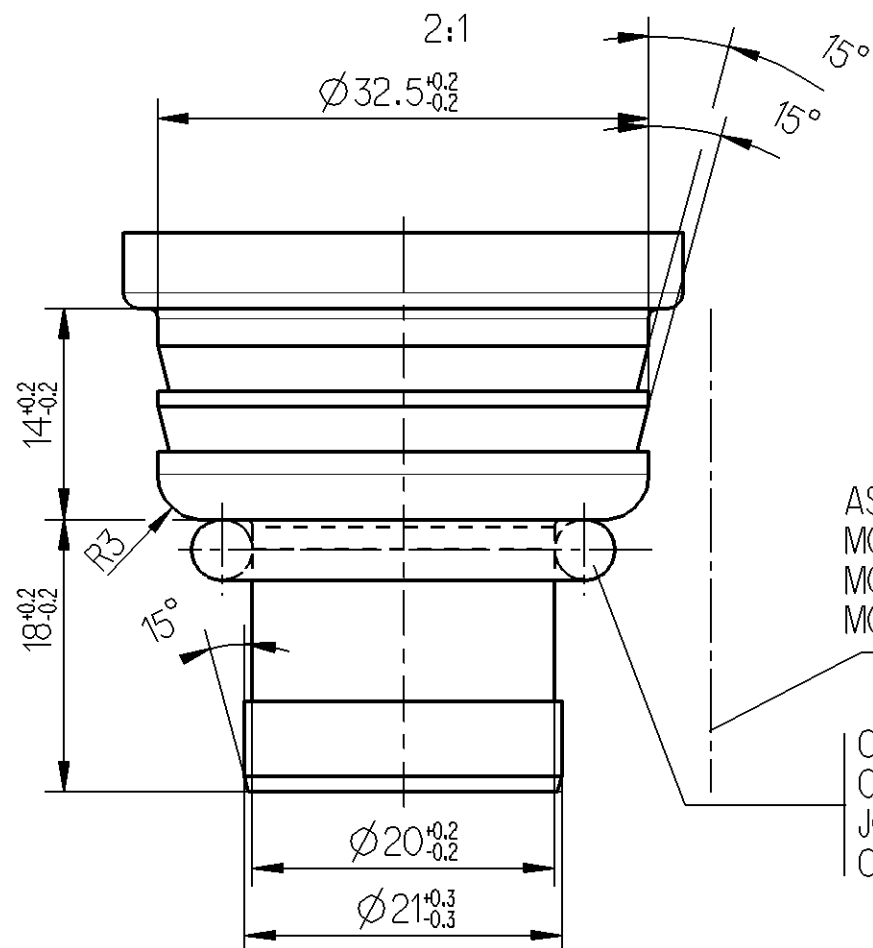

ASSEMBLY ENGAGE IN BOTH GROOVES
MONTAGE IN BEIDE NUTEN EINRASTEN
MONTAGE ENCLIQUETER DANS LES DEUX GORGES
MONTAGGIO INGAGGIARE IN ENTRAMBE LE SCANALATURE

O-RING	
O-RING	
JOINT TORIQUE	**
O-RING	

SUPPLIED
MITGELIEFERT
LIVRAISON
CONSEGNA

			Fine		0.5	1.0	1.5	2.0	±3°	MSS	Scale	Material No.			WABCO Id. No.: 4324070160			
114500	1xB	07-09-17	Medium	X	1.0	2.0	3.0	4.0		0.122 KG	1:1 2:1	432 407 016 0			Doc. Code		Language	Sheet
060573	1xA	99-01-21	Coarse		2.0	3.5	5.0	6.5		Size	TRI				005		en/de fr/it	1/1
DCN-No. Rev. Date			Tapped Holes acc.							A 2	530		Function Code	CAD System	Prod.Type	Replacement for		
State of Revision			1) Tolerance Class Applied Crossmarked											Pro/E	0 0 X			