

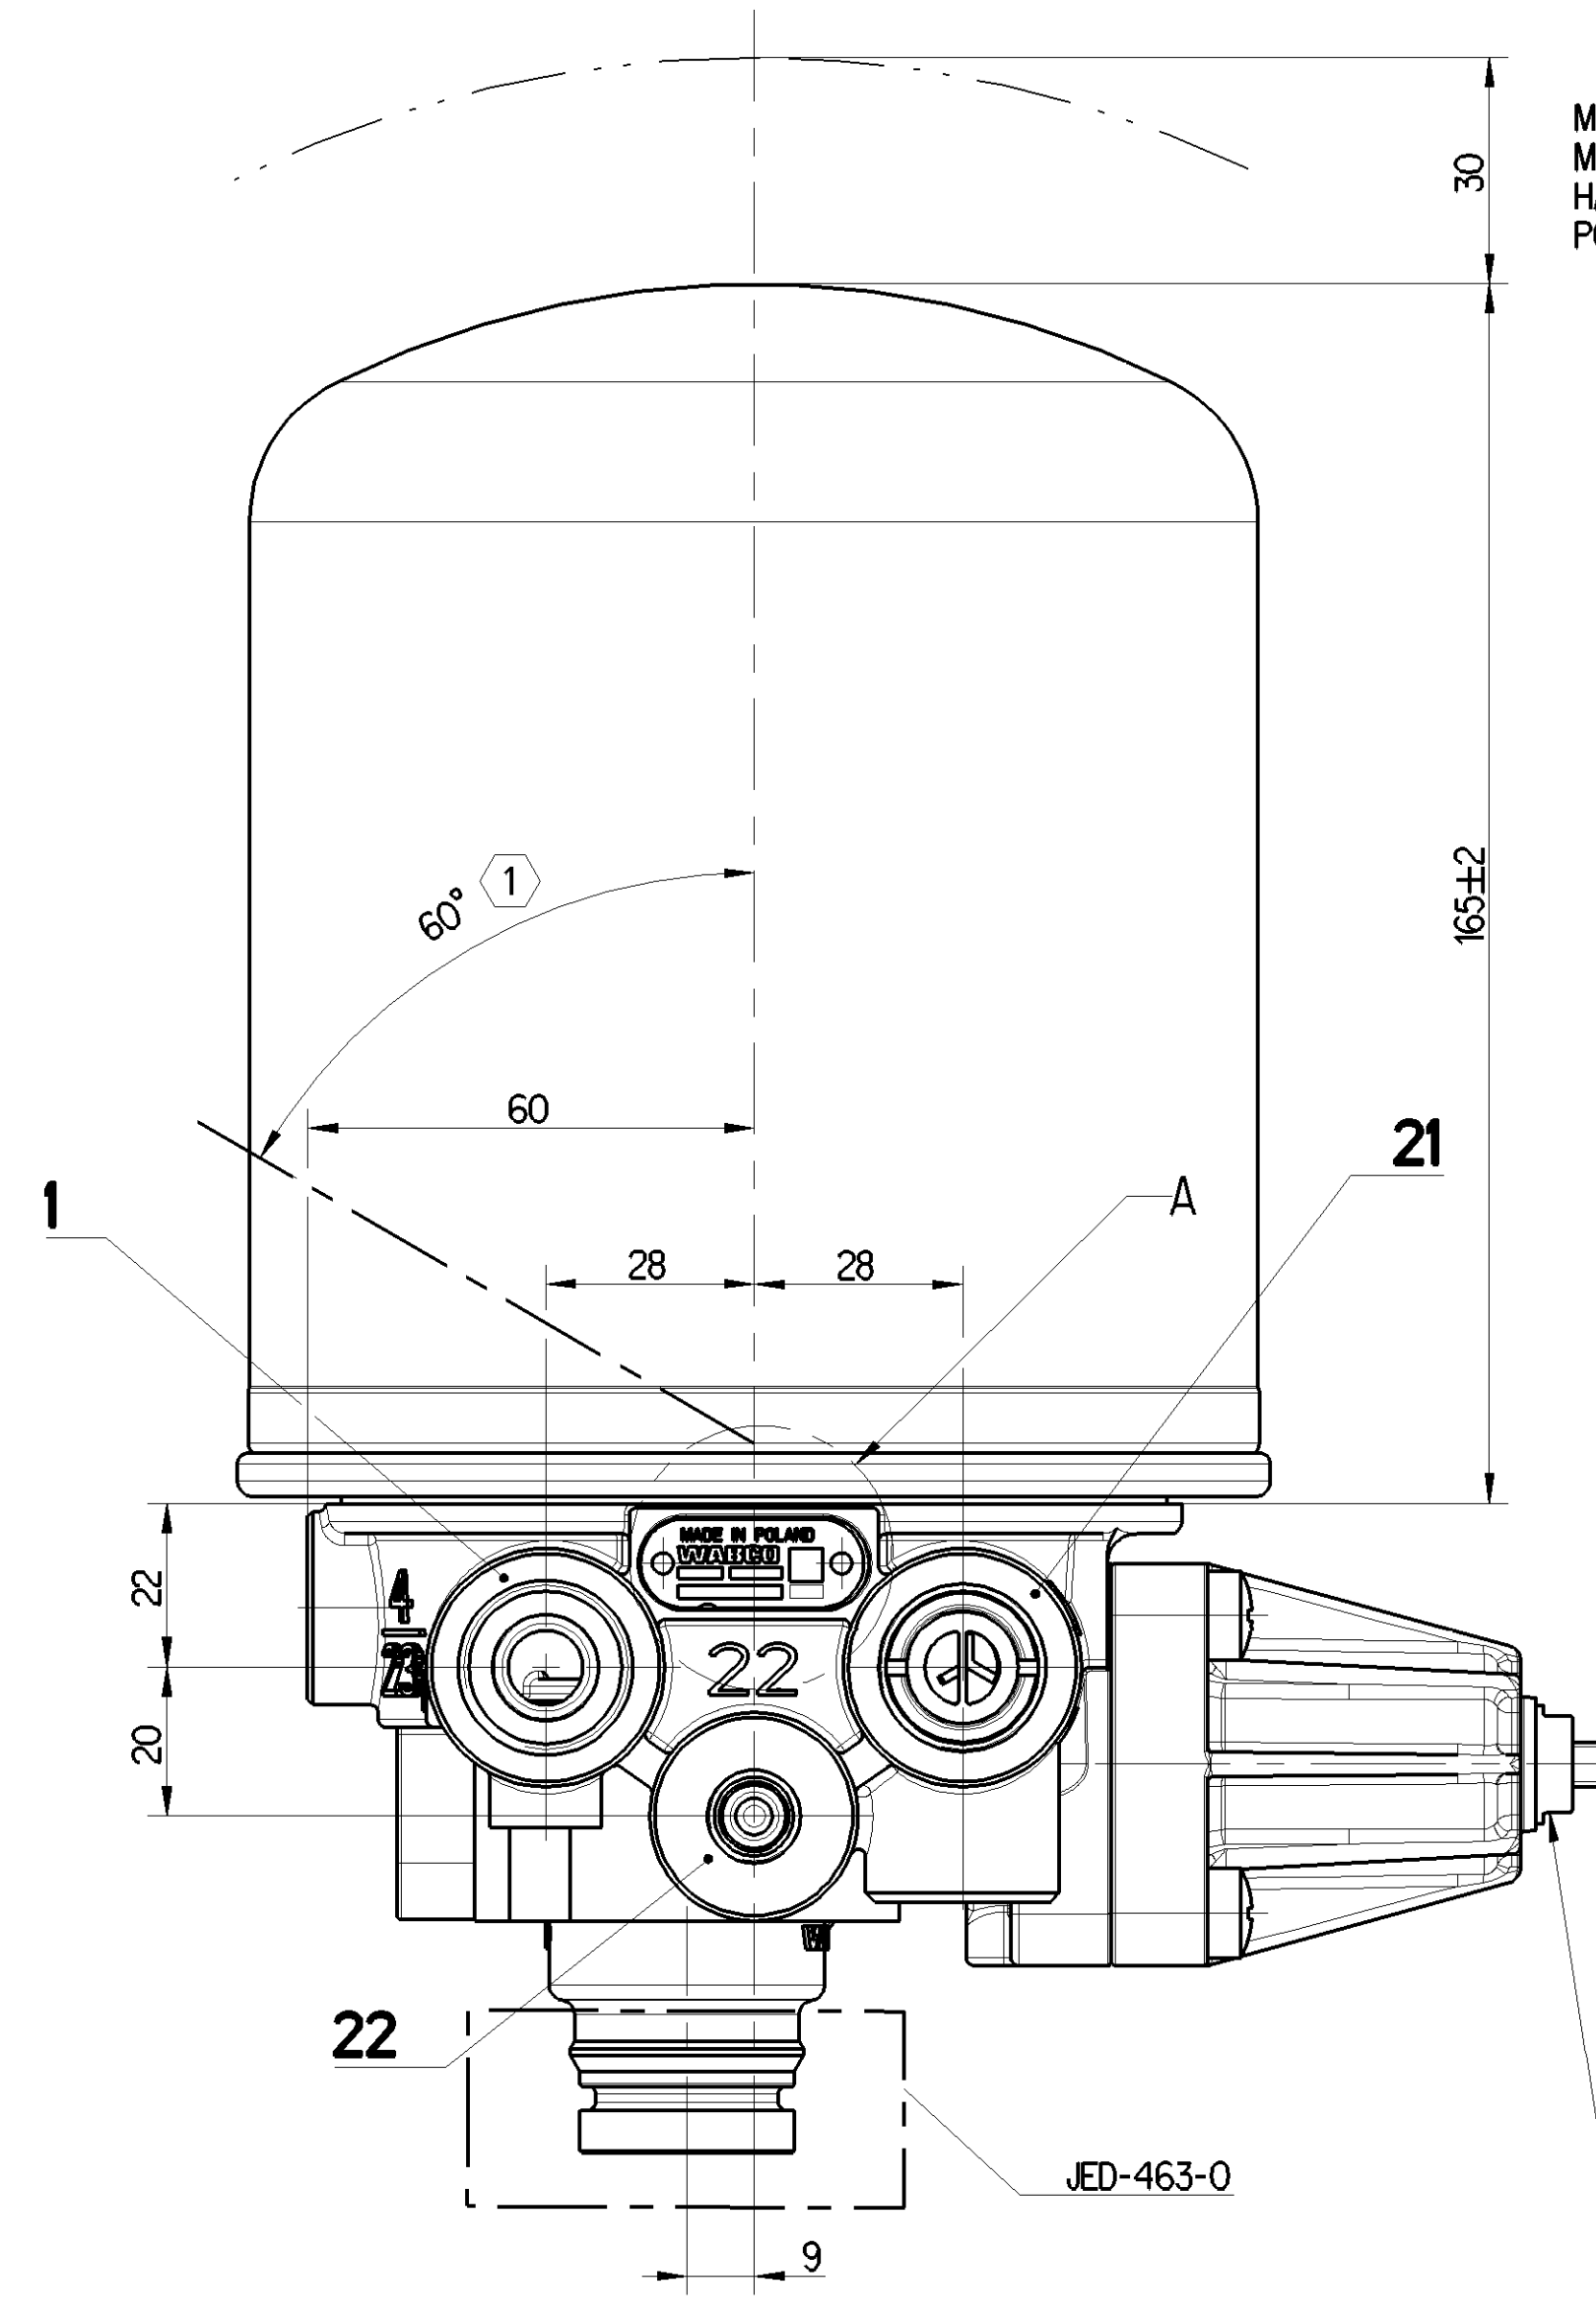
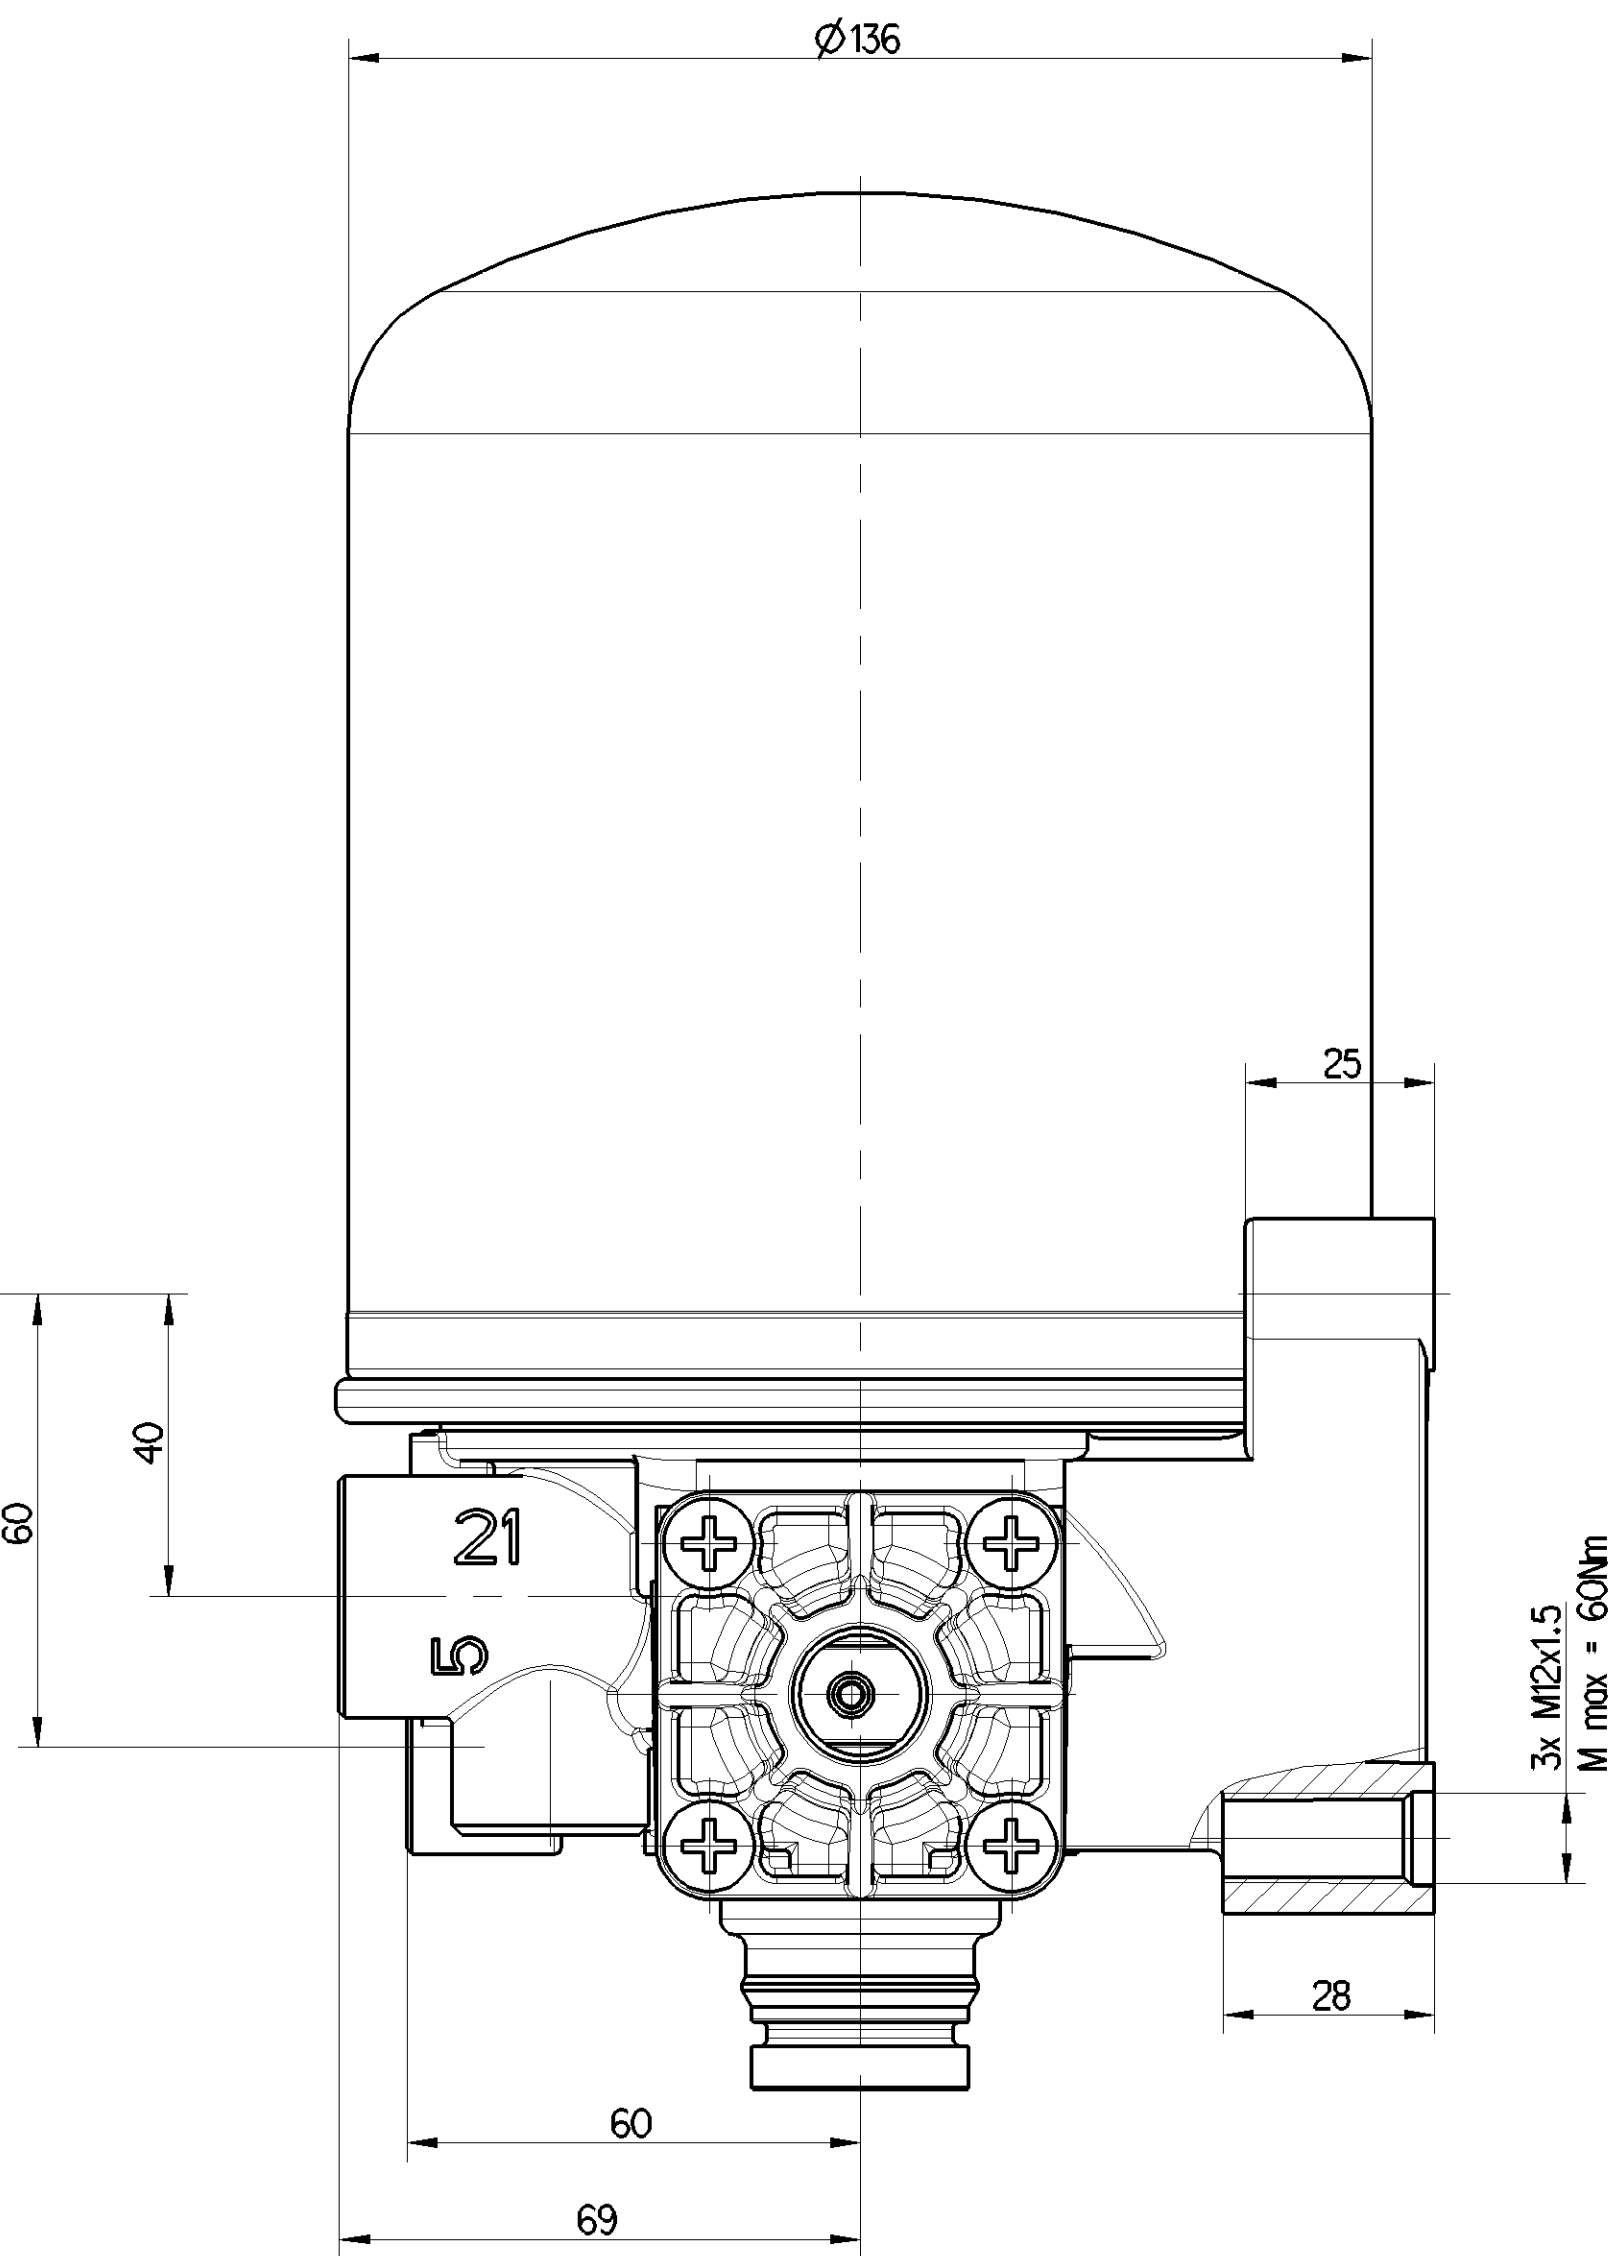


PART CODE	MATERIAL	SURFACE PROTECTION
I	ALUMINIUM ALLOY	CHROMATED
II	STEEL	PASSIVATED
III	STEEL	PAINTED
IV	PLASTIC	NO TREATMENT

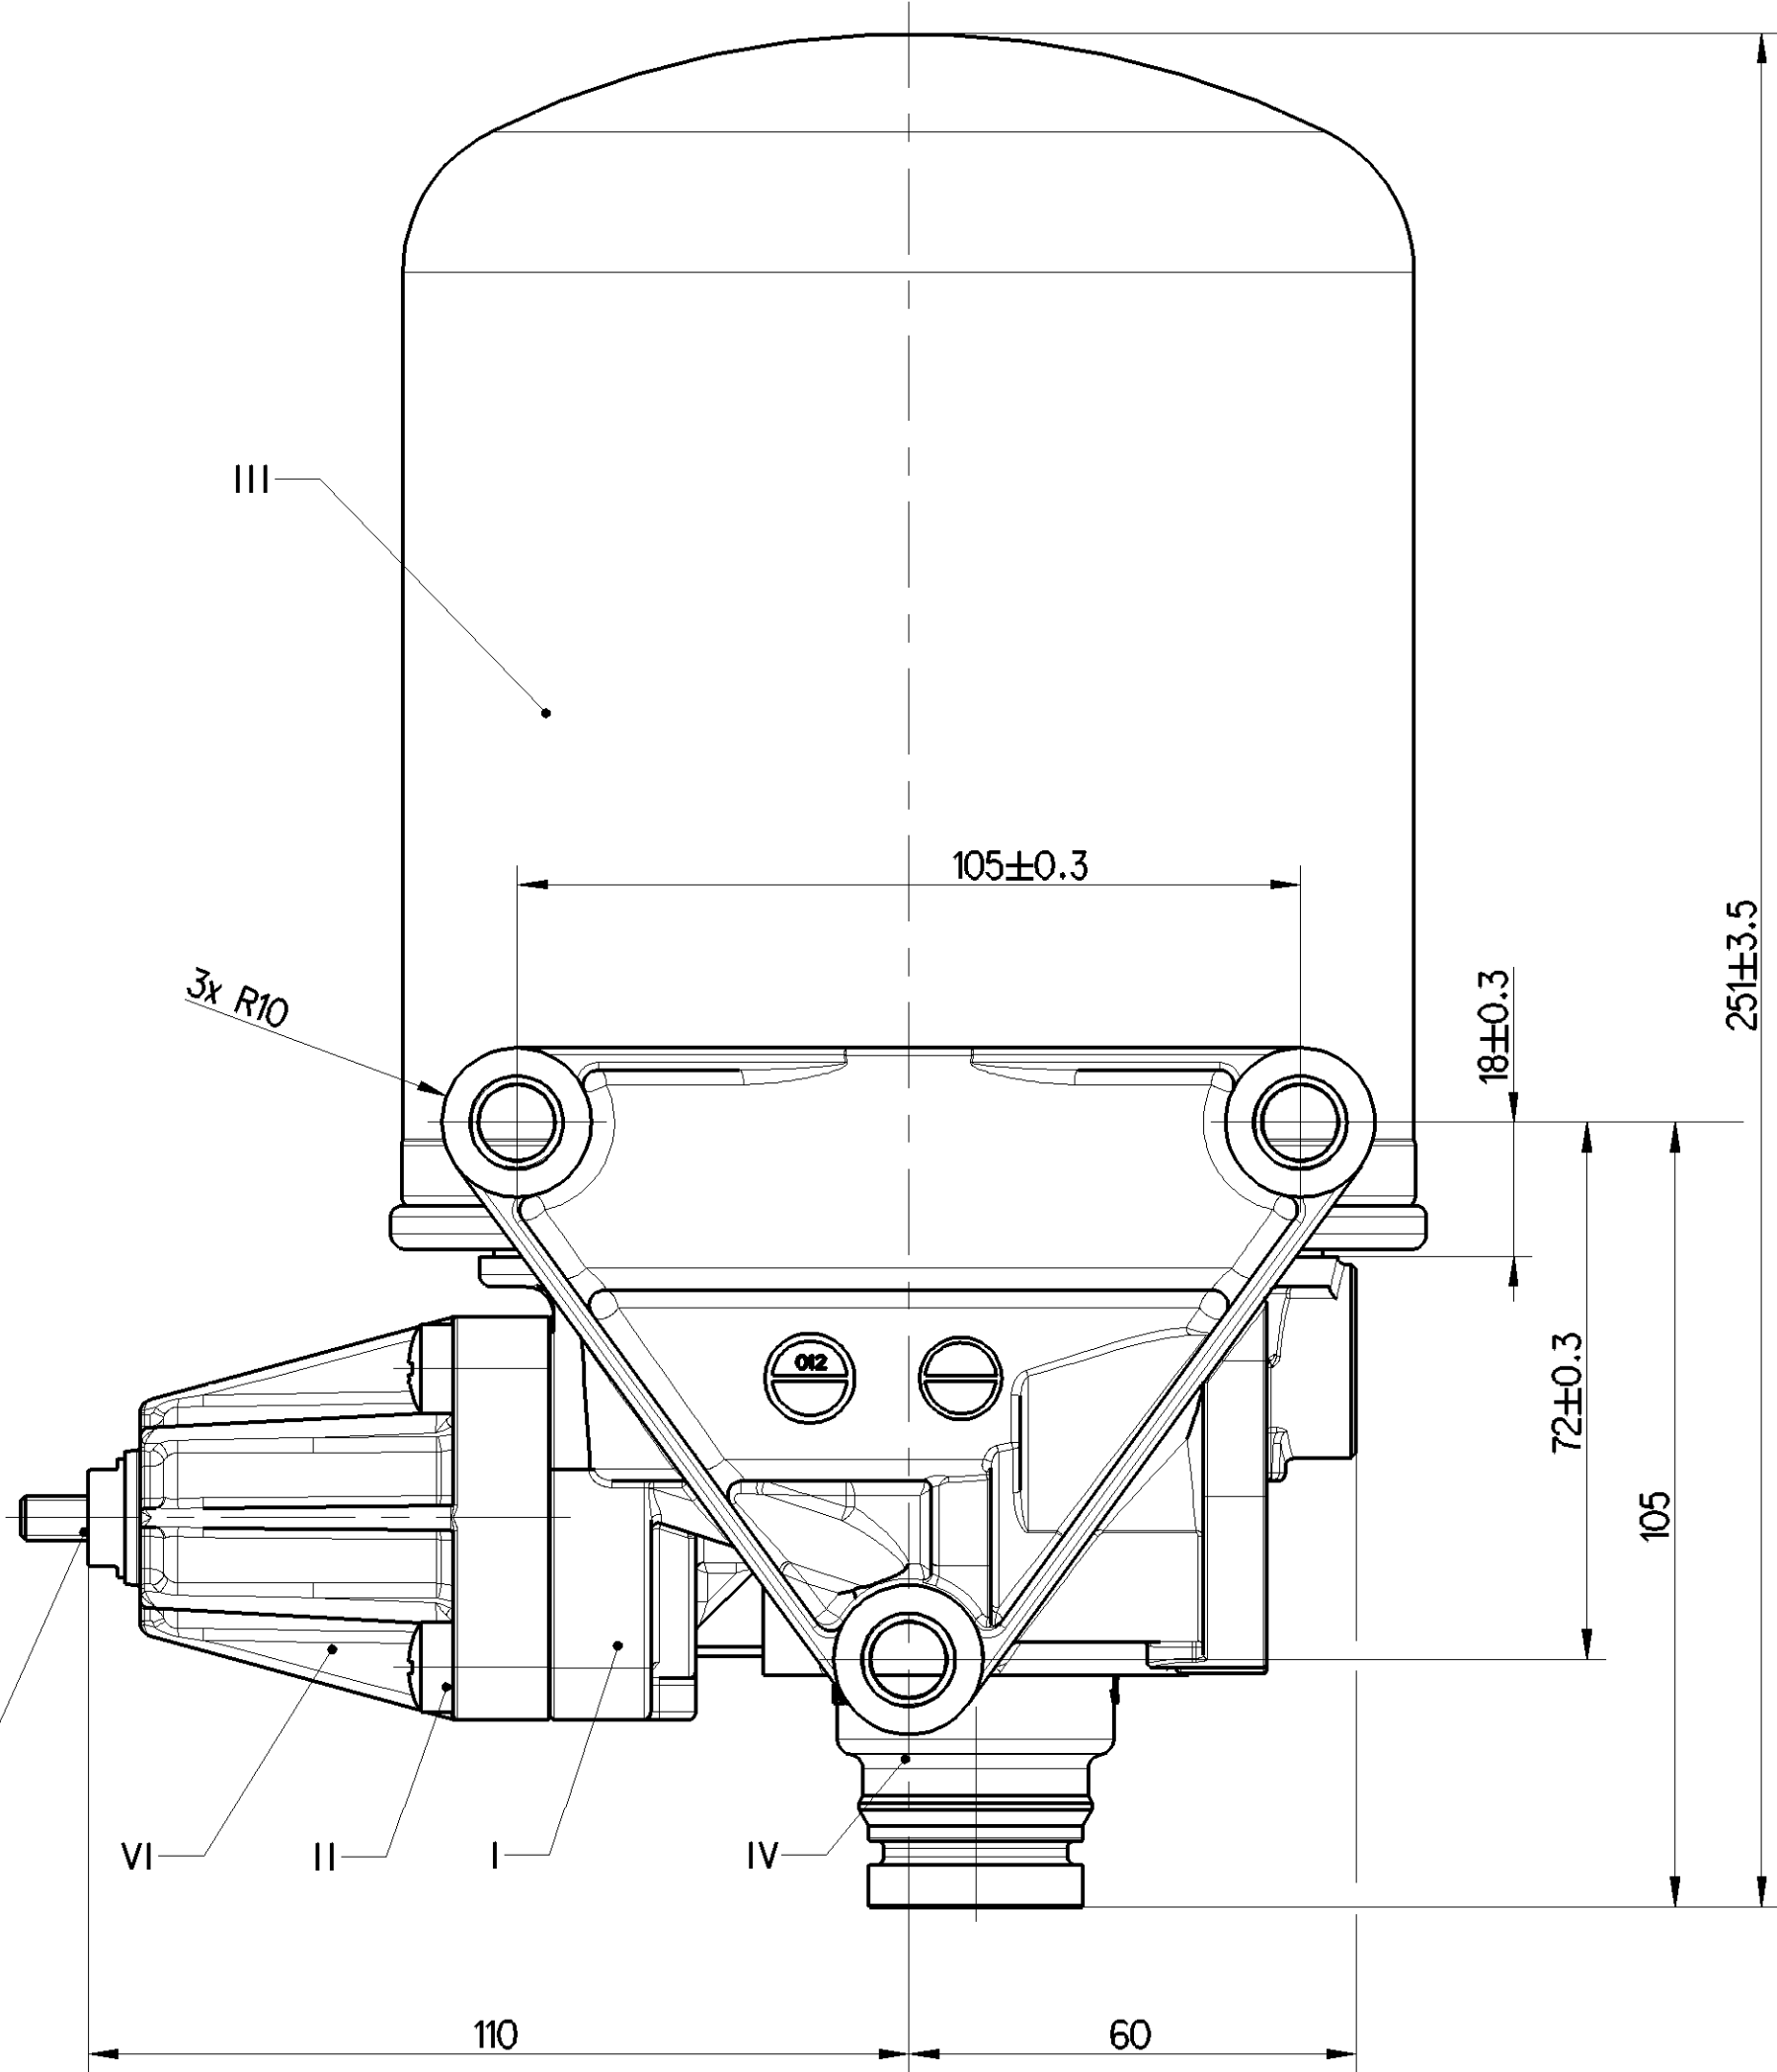



MOUNTING HEIGHT
MONTAGEHOEHE
HAUTEUR DE MONTAGE
POSIZIONE DI MONTAGGIO

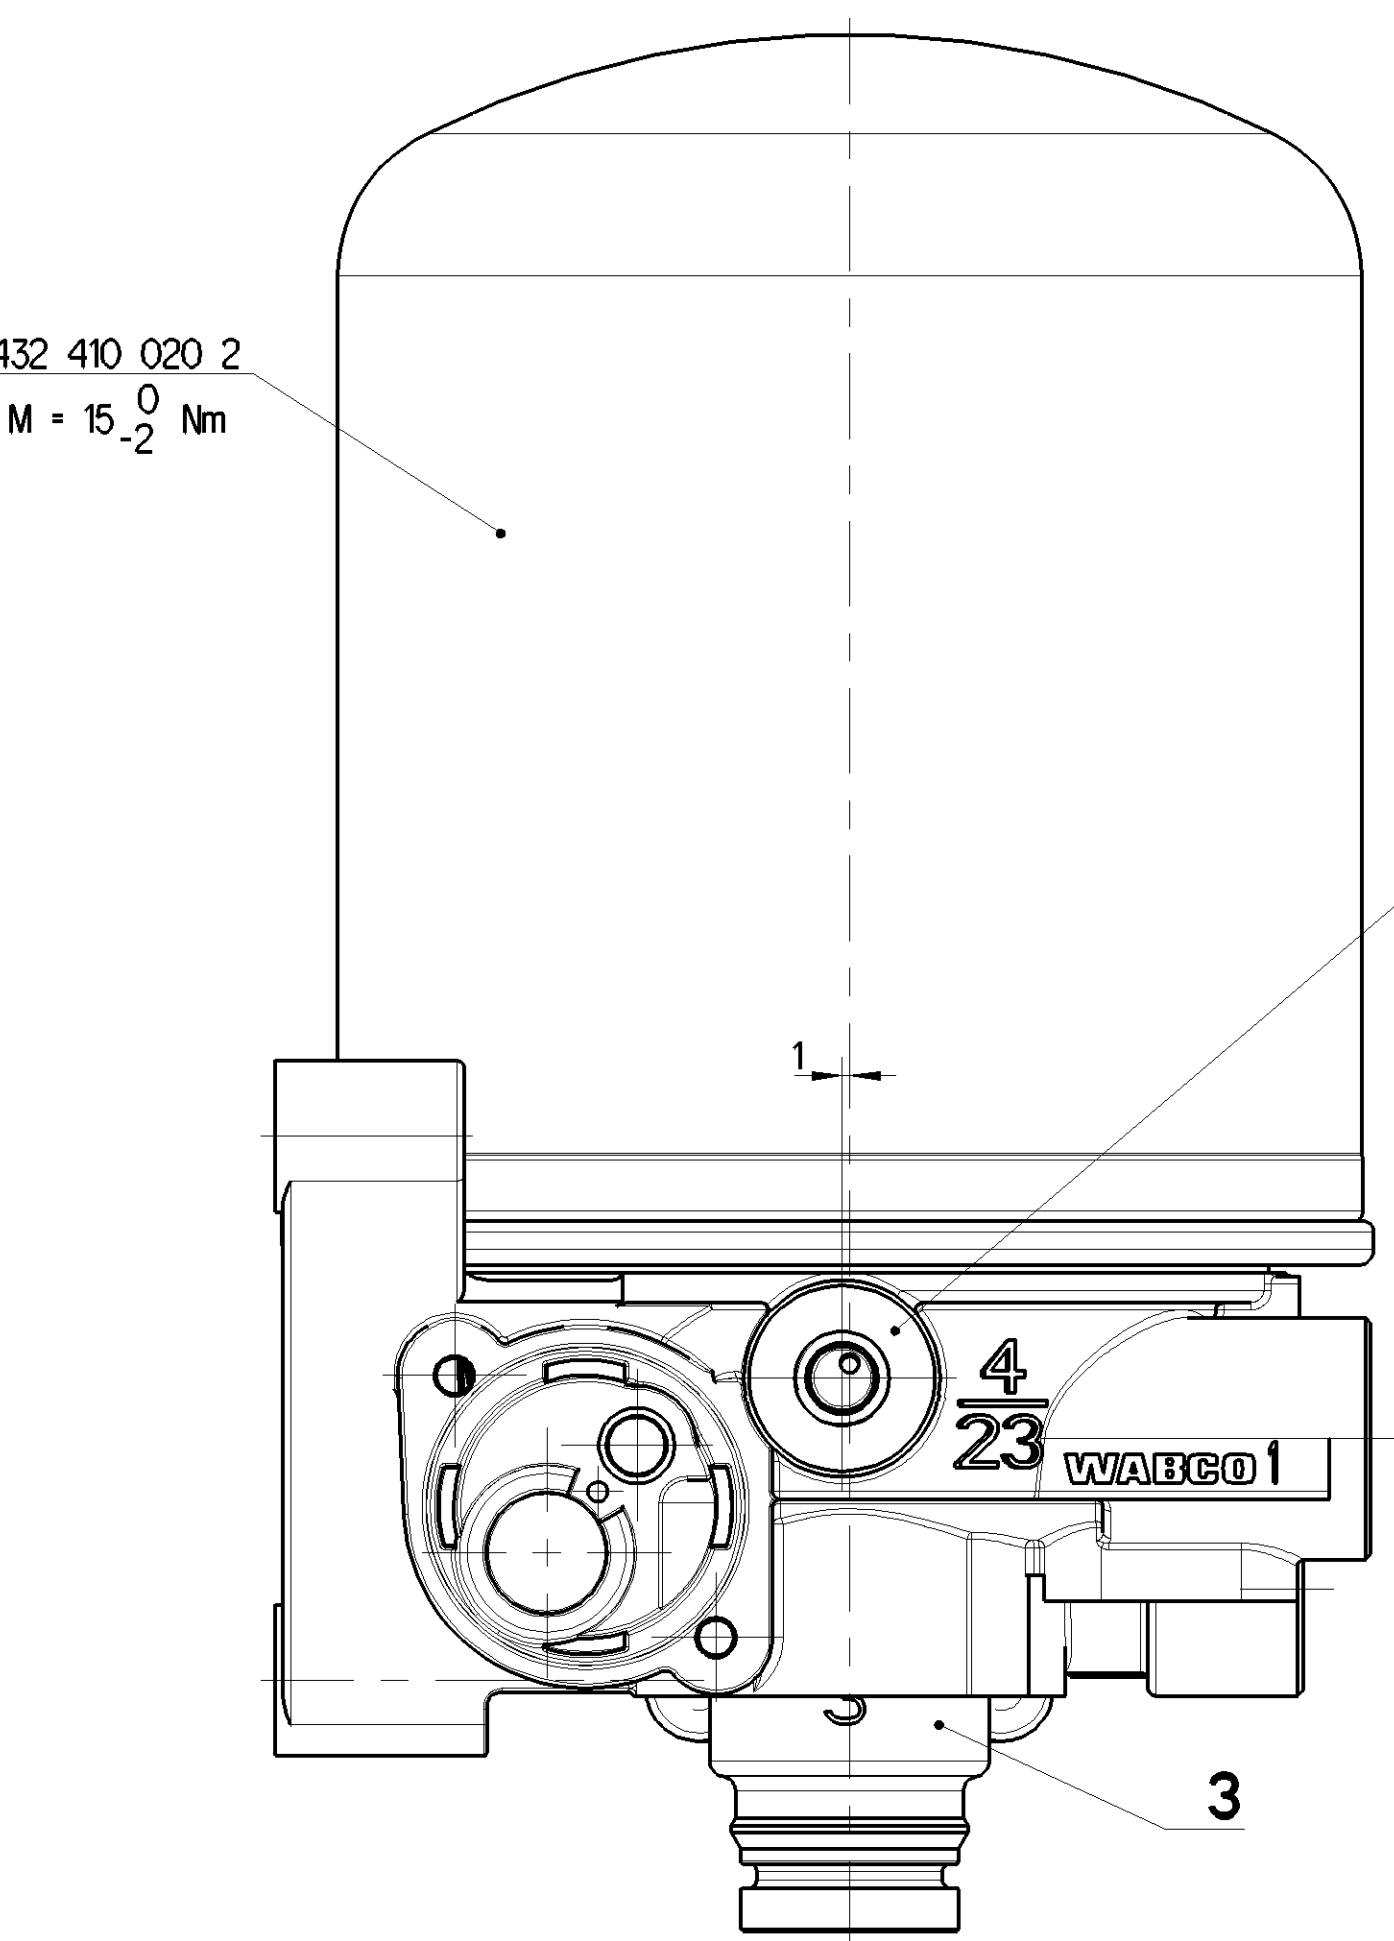



ADJUSTMENT MARKER WITH PAINT
EINSTELLUNG MIT LACK GEKENNZEICHNET
ADJUSTAGE MARQUE AVEC VERNIS
REGOLAZIONE MARCATO CON VERNICE

TECHNICAL DATA, TECHNISCHE DATEN, CARACTERISTIQUES TECHNIQUES, CARATTERISTICHE TECNICHE

THERMAL RANGE OF CONTINUOUS APPLICATION: TERMISCHER DAUERANWENDUNGSBEREICH: PLAGE DE TEMPERATURE EN UTILISATION CONTINUE: COMPO DI APPLICAZIONE CONTINUA:	-40°C... +65°C
RESISTANCE TO HEAT: WAERMEBESTAENDIGKEIT: RESISTANCE A LA CHALEUR: RESISTANZA AL CALORE:	+80°C MAX
MEDIUM: COMPRESSED AIR MEDIUM: DRUCKLUFT FLUIDE: AIR COMPRI ME FLUIDO: ARIA COMPRESSA	
WORKING PRESSURE: BETRIEBSDRUCK: PRESSION DE SERVICE: PRESSIONE D' ESERCIZIO:	Pe MAX=13 bar
MAX. PREMISSIBLE FREQUENCY MAX. ZULAESSIGE FREQUENZ MAX. ADMISSIBLE FREQUENCE MAX. AMMISSIBLE FREQUENZA	50 Hz
MAX. PREMISSIBLE ACCELERATION MAX. ZULAESSIGE BESCHLUNIGUNG ACCELERATION MAX. ADMISSIBLE ACCELERAZIONE MAX. AMMESSA	10 g
COMBINED UNLOADER: DRUCKREGLER: REGULATEUR DE PRESSION: GRUPPO DI REGOLAZIONE:	
CUT OUT PRESSURE: ABSCHALTDRUCK: PRESSION D'OUVERTURE: PRESSIONE D' APERTURA:	11.0±0.2 bar
OPERATING RANGE: SCHALTSPANNE: PLAGE DE REGULATION: GAMMA DI REGOLAZIONE:	0.7 ^{+0.6} / ₀ bar
DYNAMIC PRESSURE OF SAFETY VALVE: STAUDRUCK DES SICHERHEITSVENTILES: PRESSION DYNAMIQUE DU SOUPEPE DE SECURITE: PRESSIONE DINAMICA DELLA VALVOLA DI SICUREZZA:	13 ⁺¹ / ₀ bar (BEI Vn=100dm ³ /min.)
TORQUES FOR CONNECTIONS: ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: COUPLE DE SERRAGE DES RACCORDS: COPPIA DI SERRAGGIO DEI RACCORDI:	M12x1.5: Mmax = 21 Nm M22x1.5: Mmax = 53 Nm

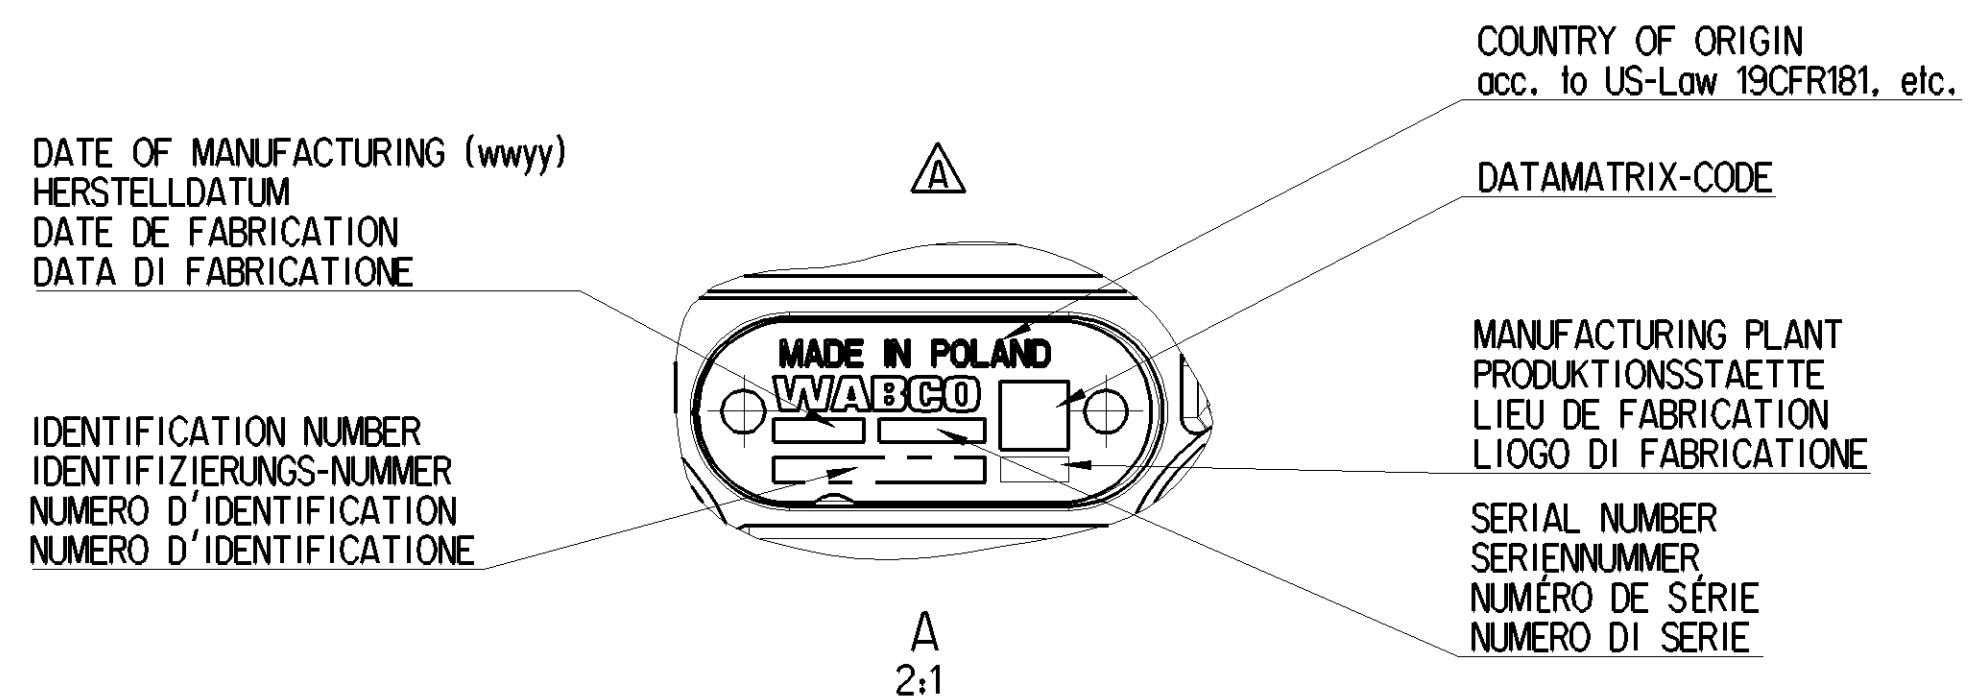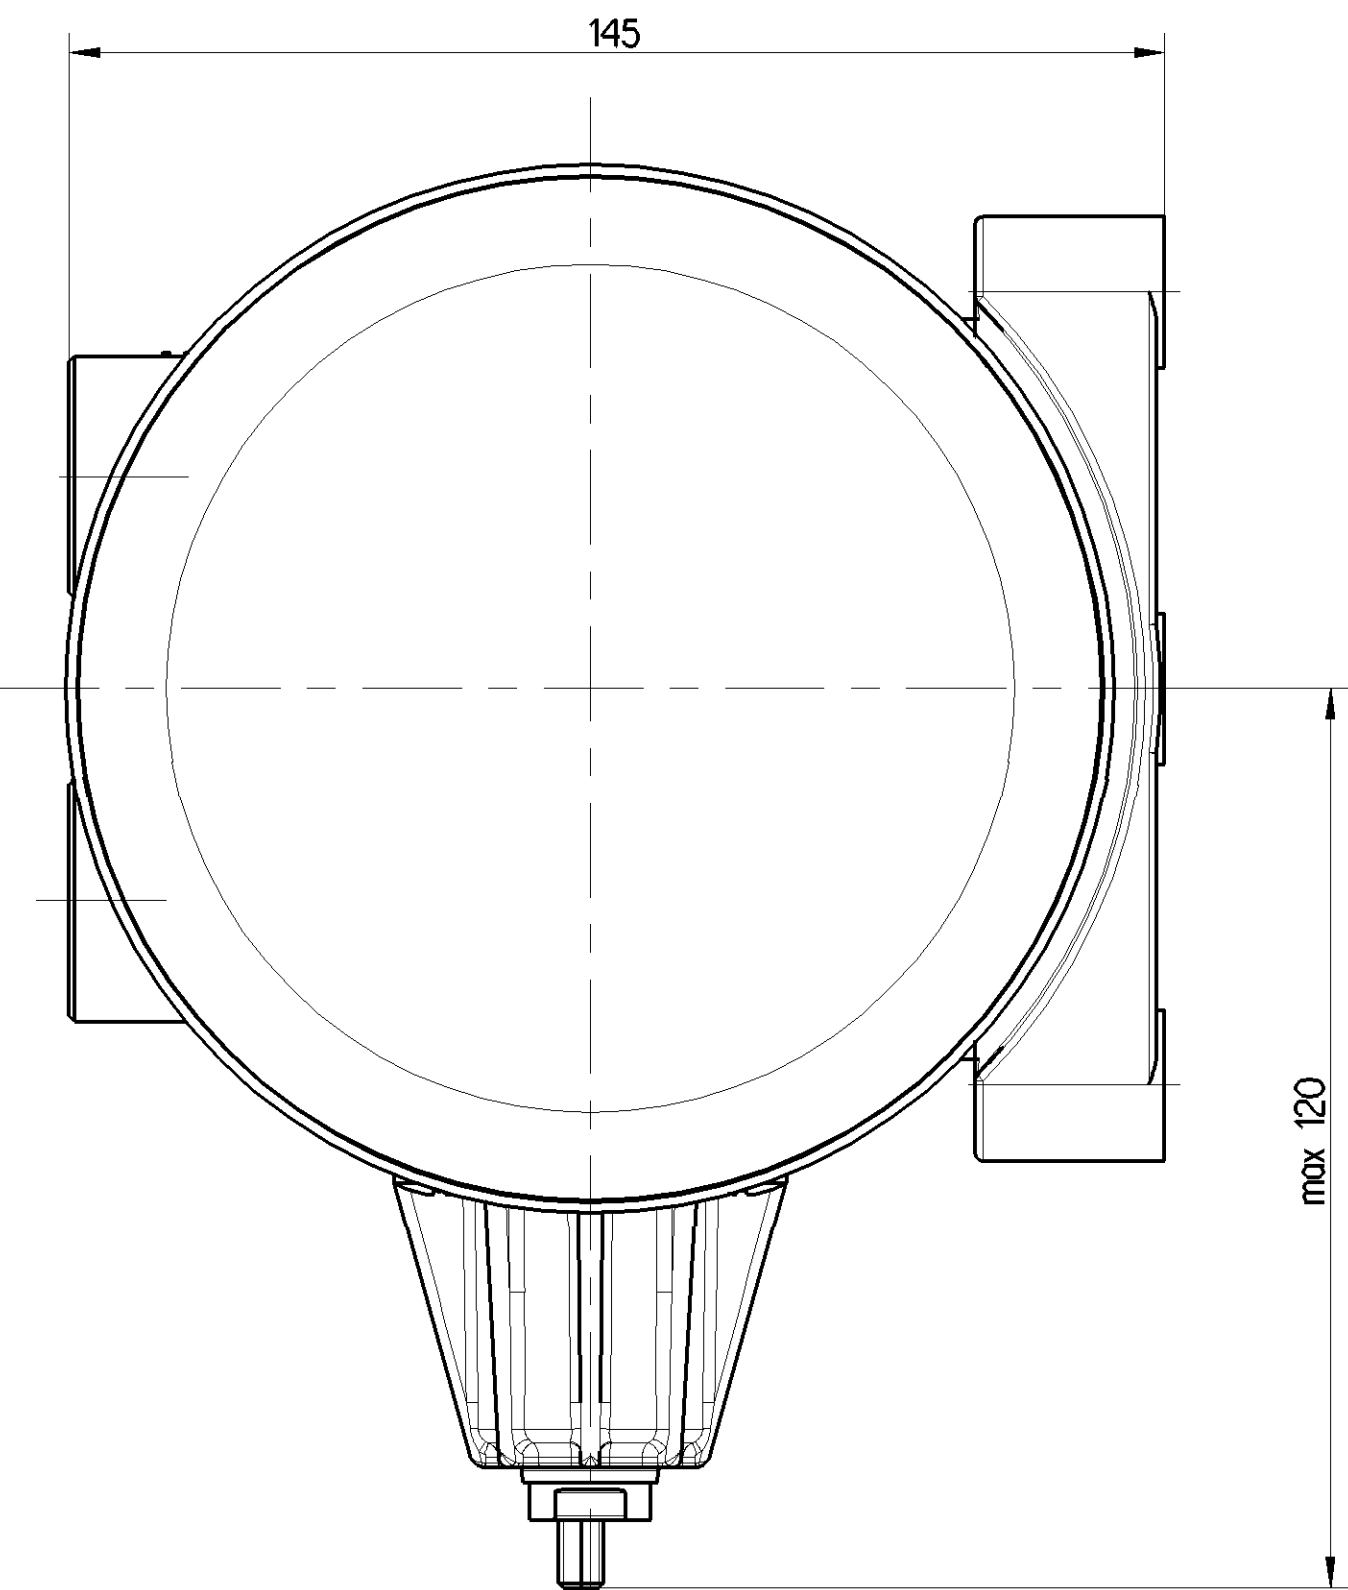

PORT ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNCTION FONCTION FUNZIONE	THREAD GEWINDE FILETAGE FILETTATURA
1	FROM THE COMPRESSOR VOM KOMPRESSOR PROVENANT DU COMPRESSEUR PROVENIENTE DEL COMPRESSORE	M22x1.5 d=15
21	TO THE RESERVOIRS ZU DEN LUTBEHAEL TERN AUX RESERVOIR AL SERBATOII PER	M22x1.5 d=24.5
22	TO THE RESERVOIRS FOR REGENERATED AIR ZUM REGENERATIONS-LUTBEHALTER AUX RESERVOIRS D' AIR REGENERE AL SERBATOII PER L' ARIA RIGENERATIA	M12x1.5 d=12
4/23	CONTROL PORT STEUERANSCHLUSS ORIFICE DE COMMANDE ORIFIZIO DI COMANDO	M12x1.5 d=12
3	EXHAUST FOR COMPRESSED AIR ENTLUFTUNG FUER DRUCKLUFT ECHAPPEMENT POUR AIR COMPRI ME SCARICO PER ARIA COMPRESSA	-

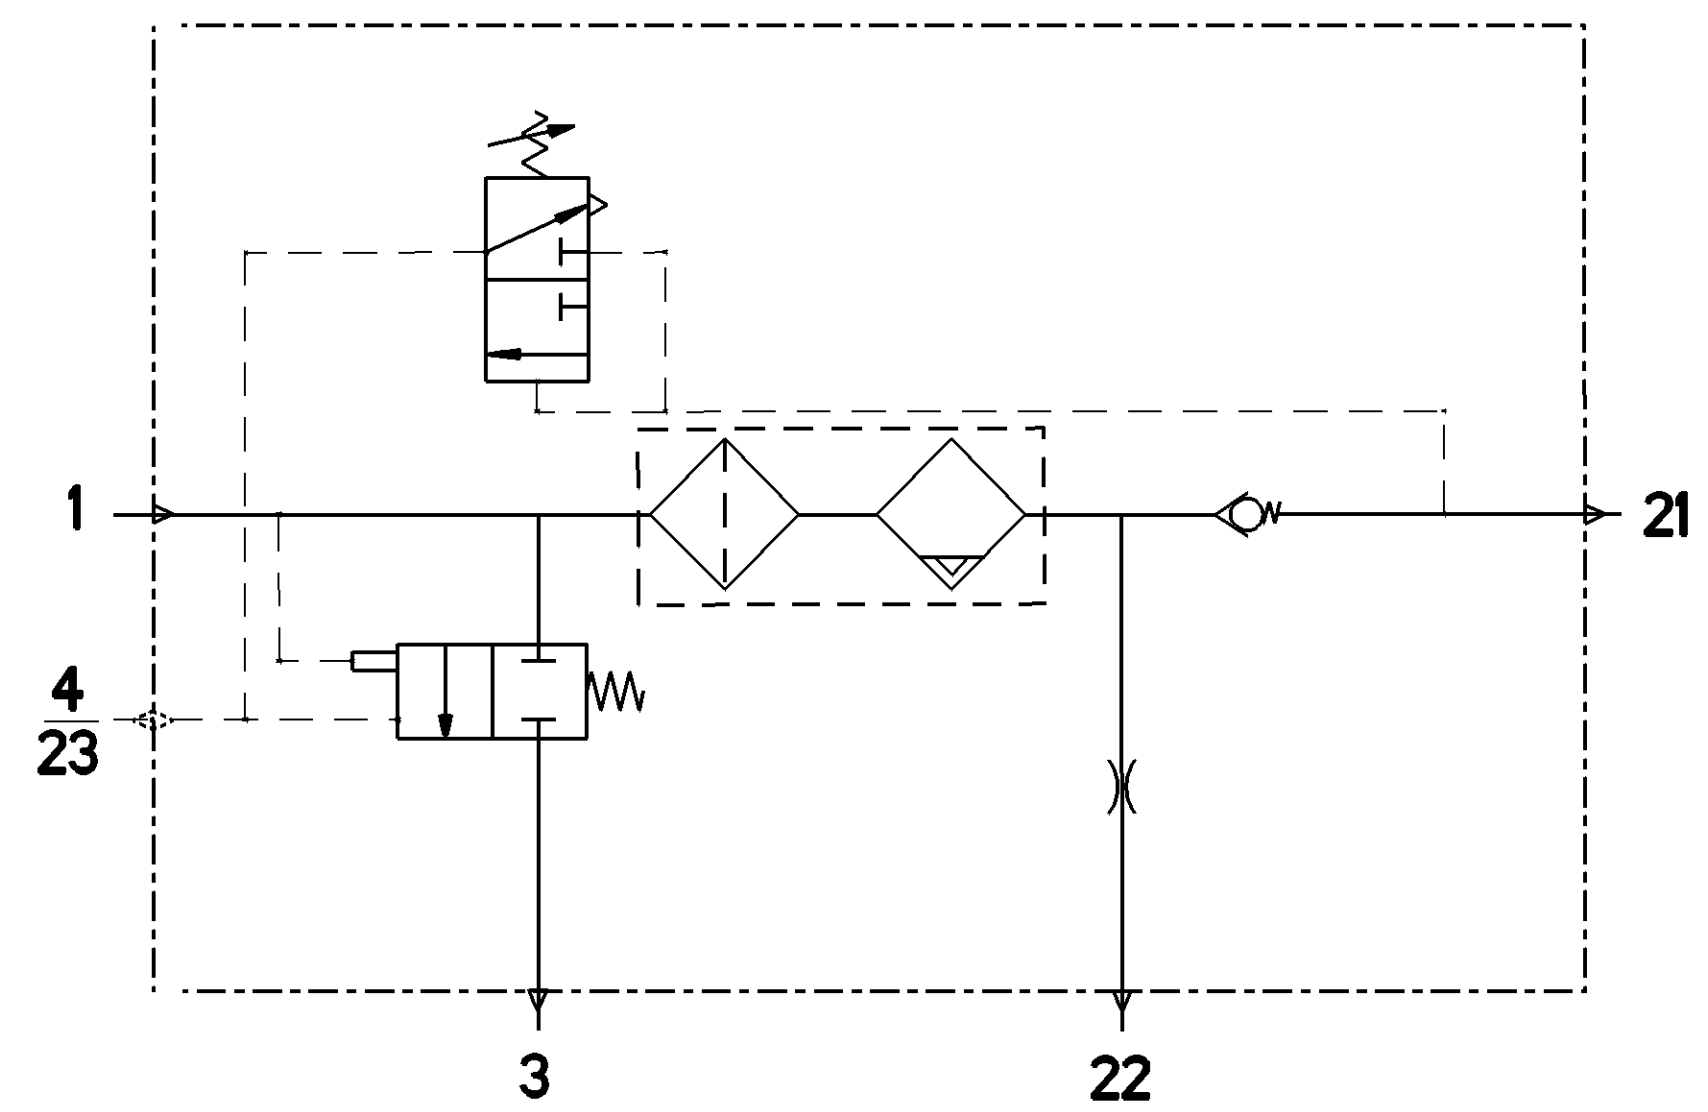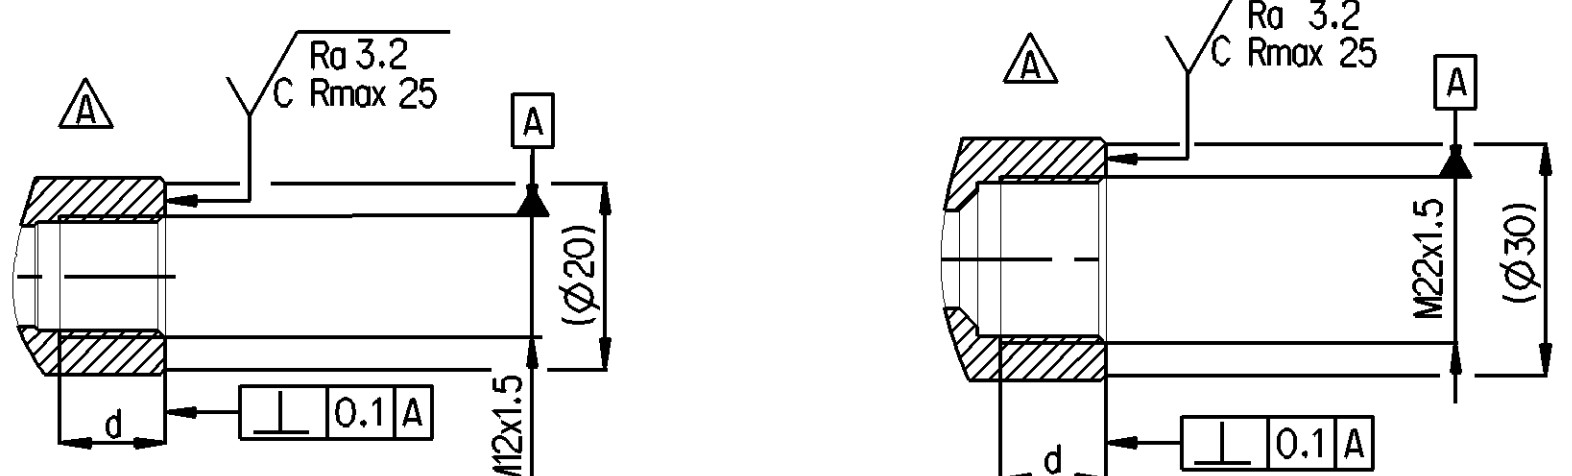

General Specification: ISO 8476, JED-534-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data: Product Specification		Date: 2022-07-13		Sheet: 1 To: 4	
Doc. Code: 0351		Class: 1		Signature: Karzyński	
General Tolerances: JED-261		Date: 2022-09-02		Signature: Kosztywno	
Class: 11		Range of nominal dimensions in mm		Material No.	
Tolerance		Tolerance		Date of first issue: 2016-01-11	
4.20		1:1		005 ML 1/1	
Size: 432 410 073 0		Revision: 4 x A		Tolerance: 0.050	
Tapped Holes acc. JED-152		Revision: 4 x A		Replacement for: -	
Tolerance: 0.050		Revision: 4 x A		Replacement for: -	