

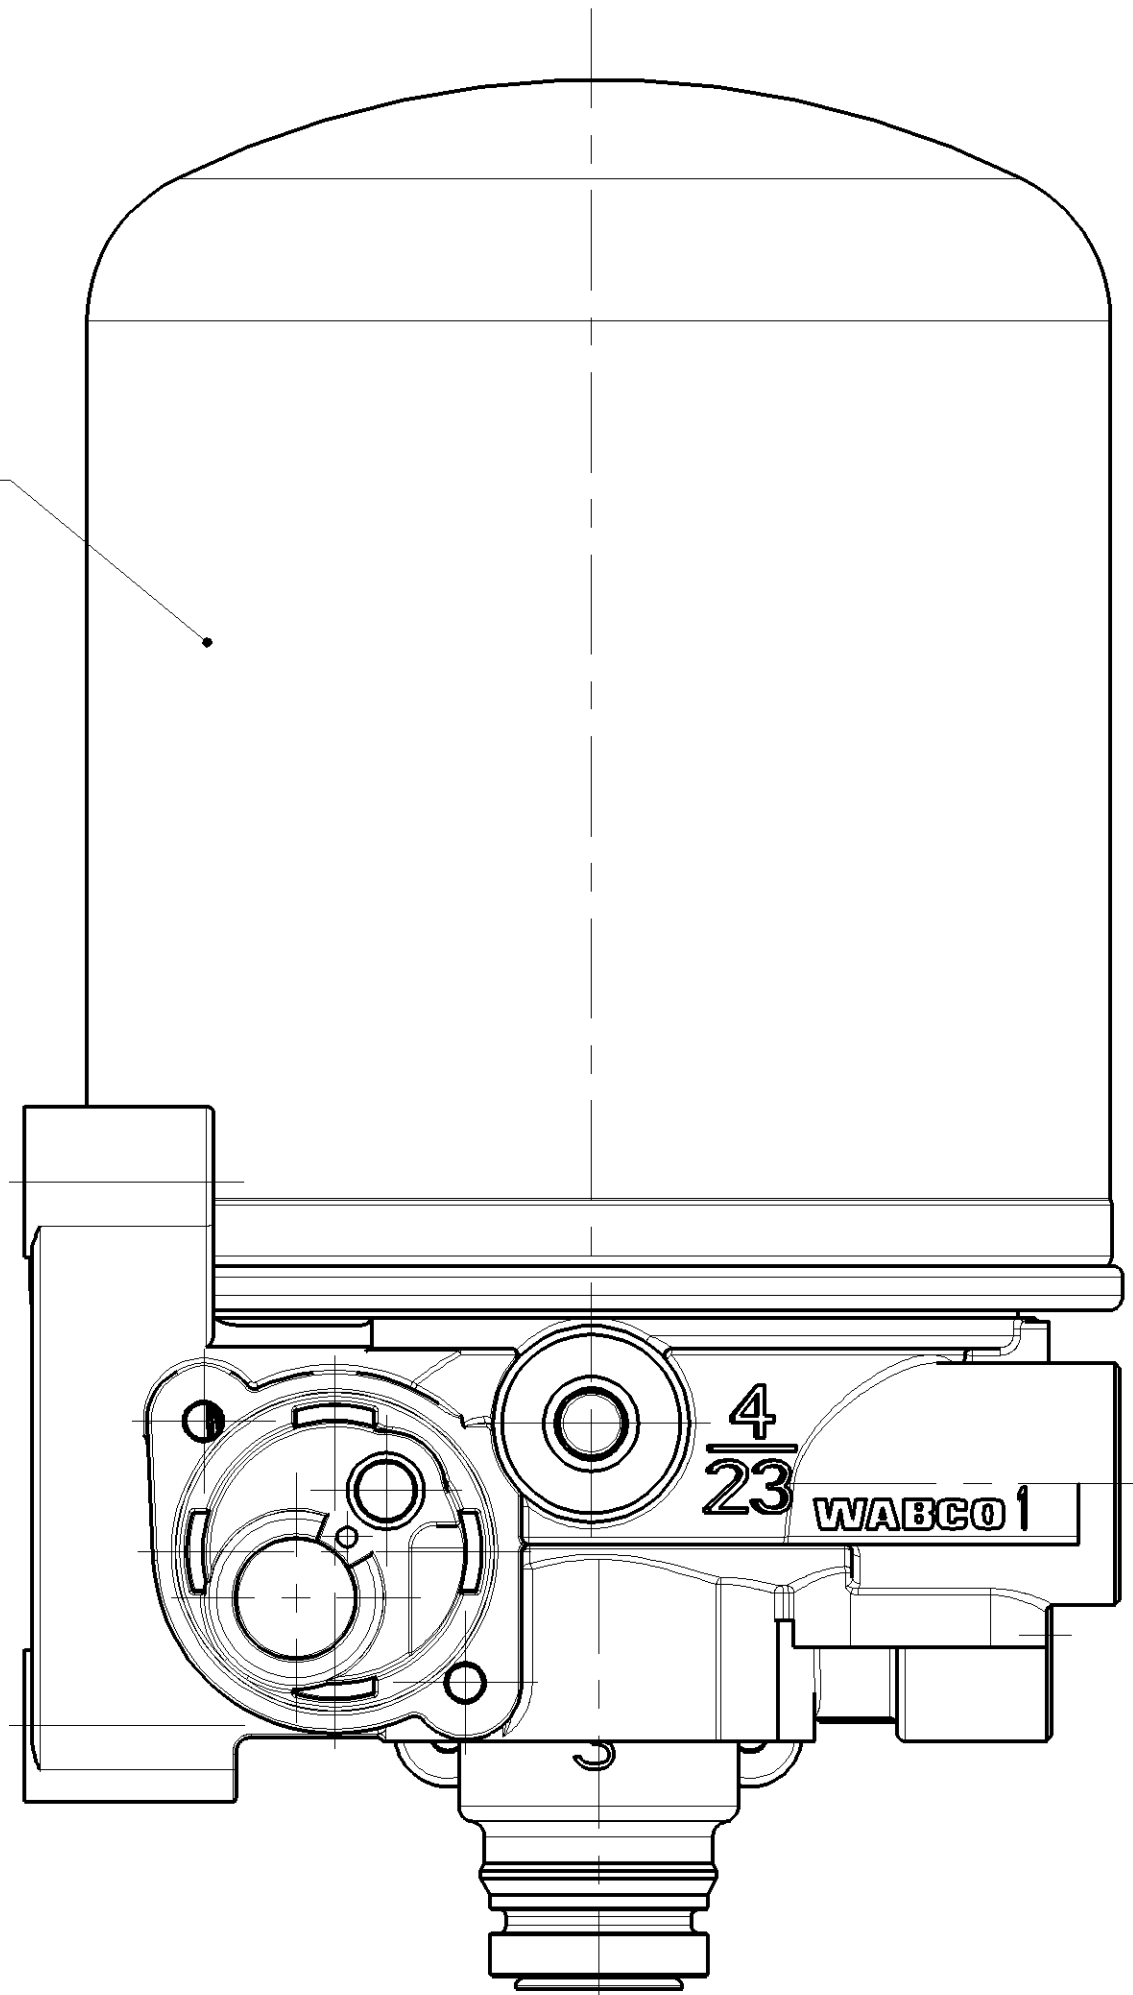
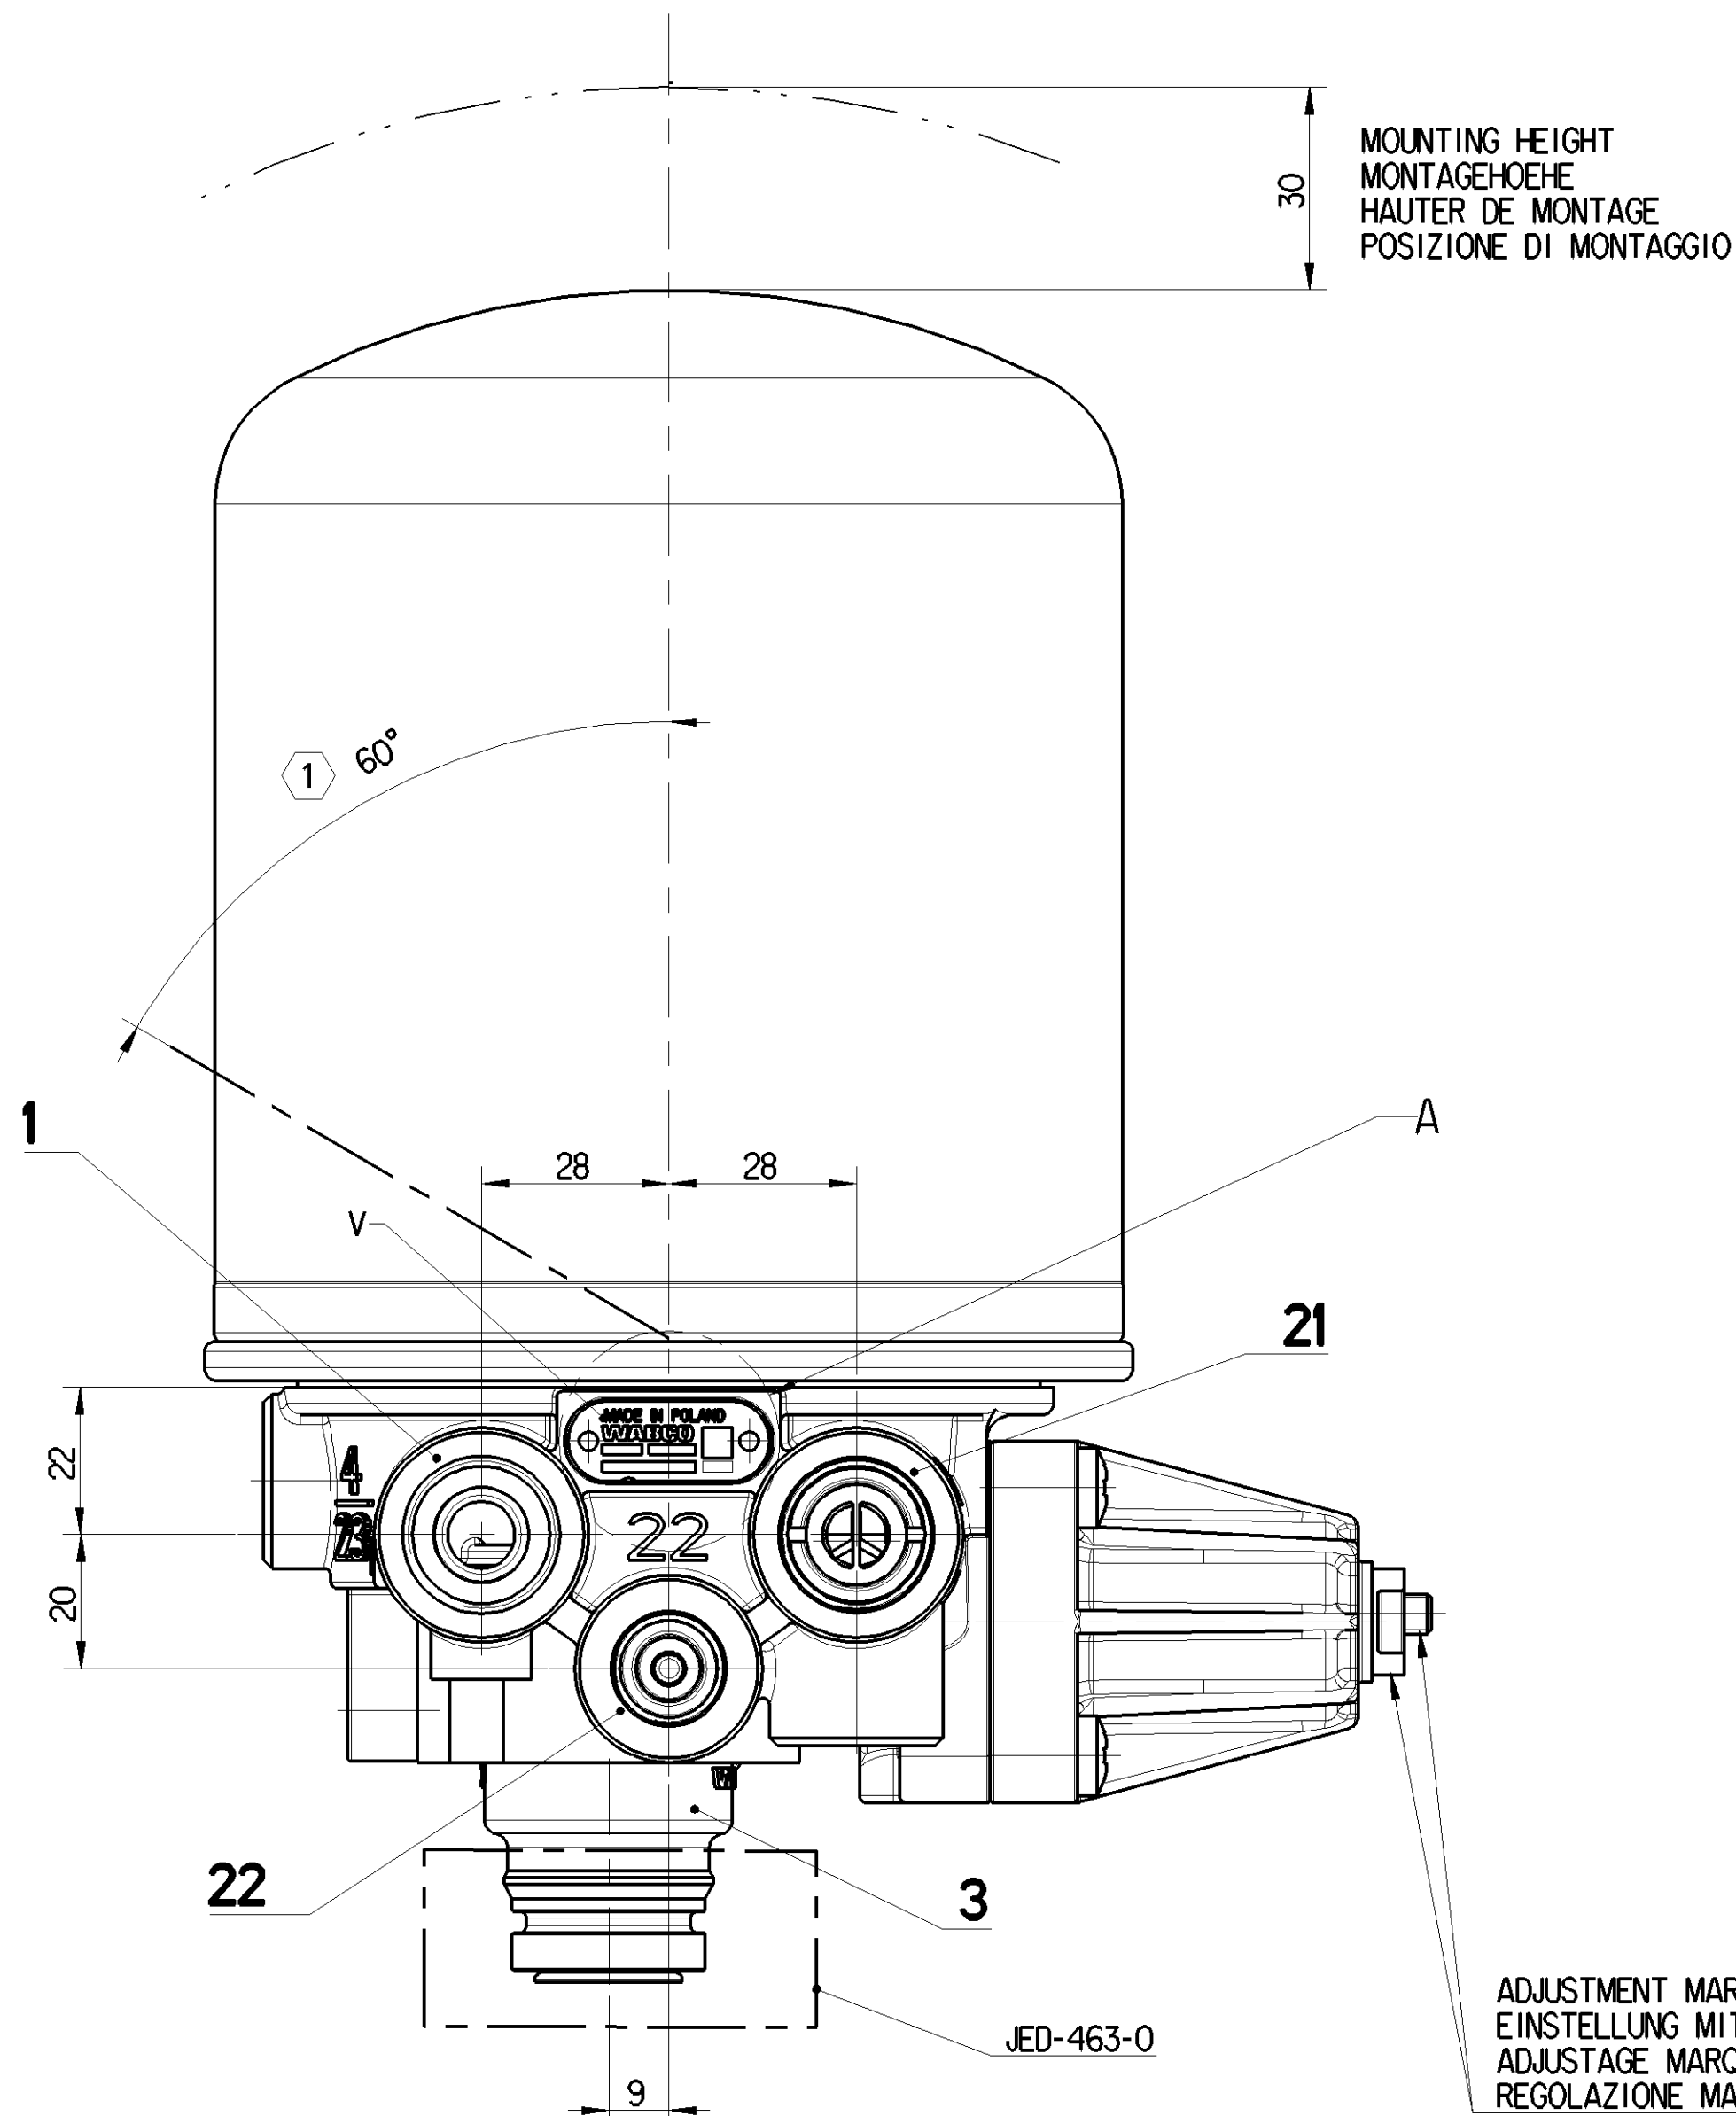
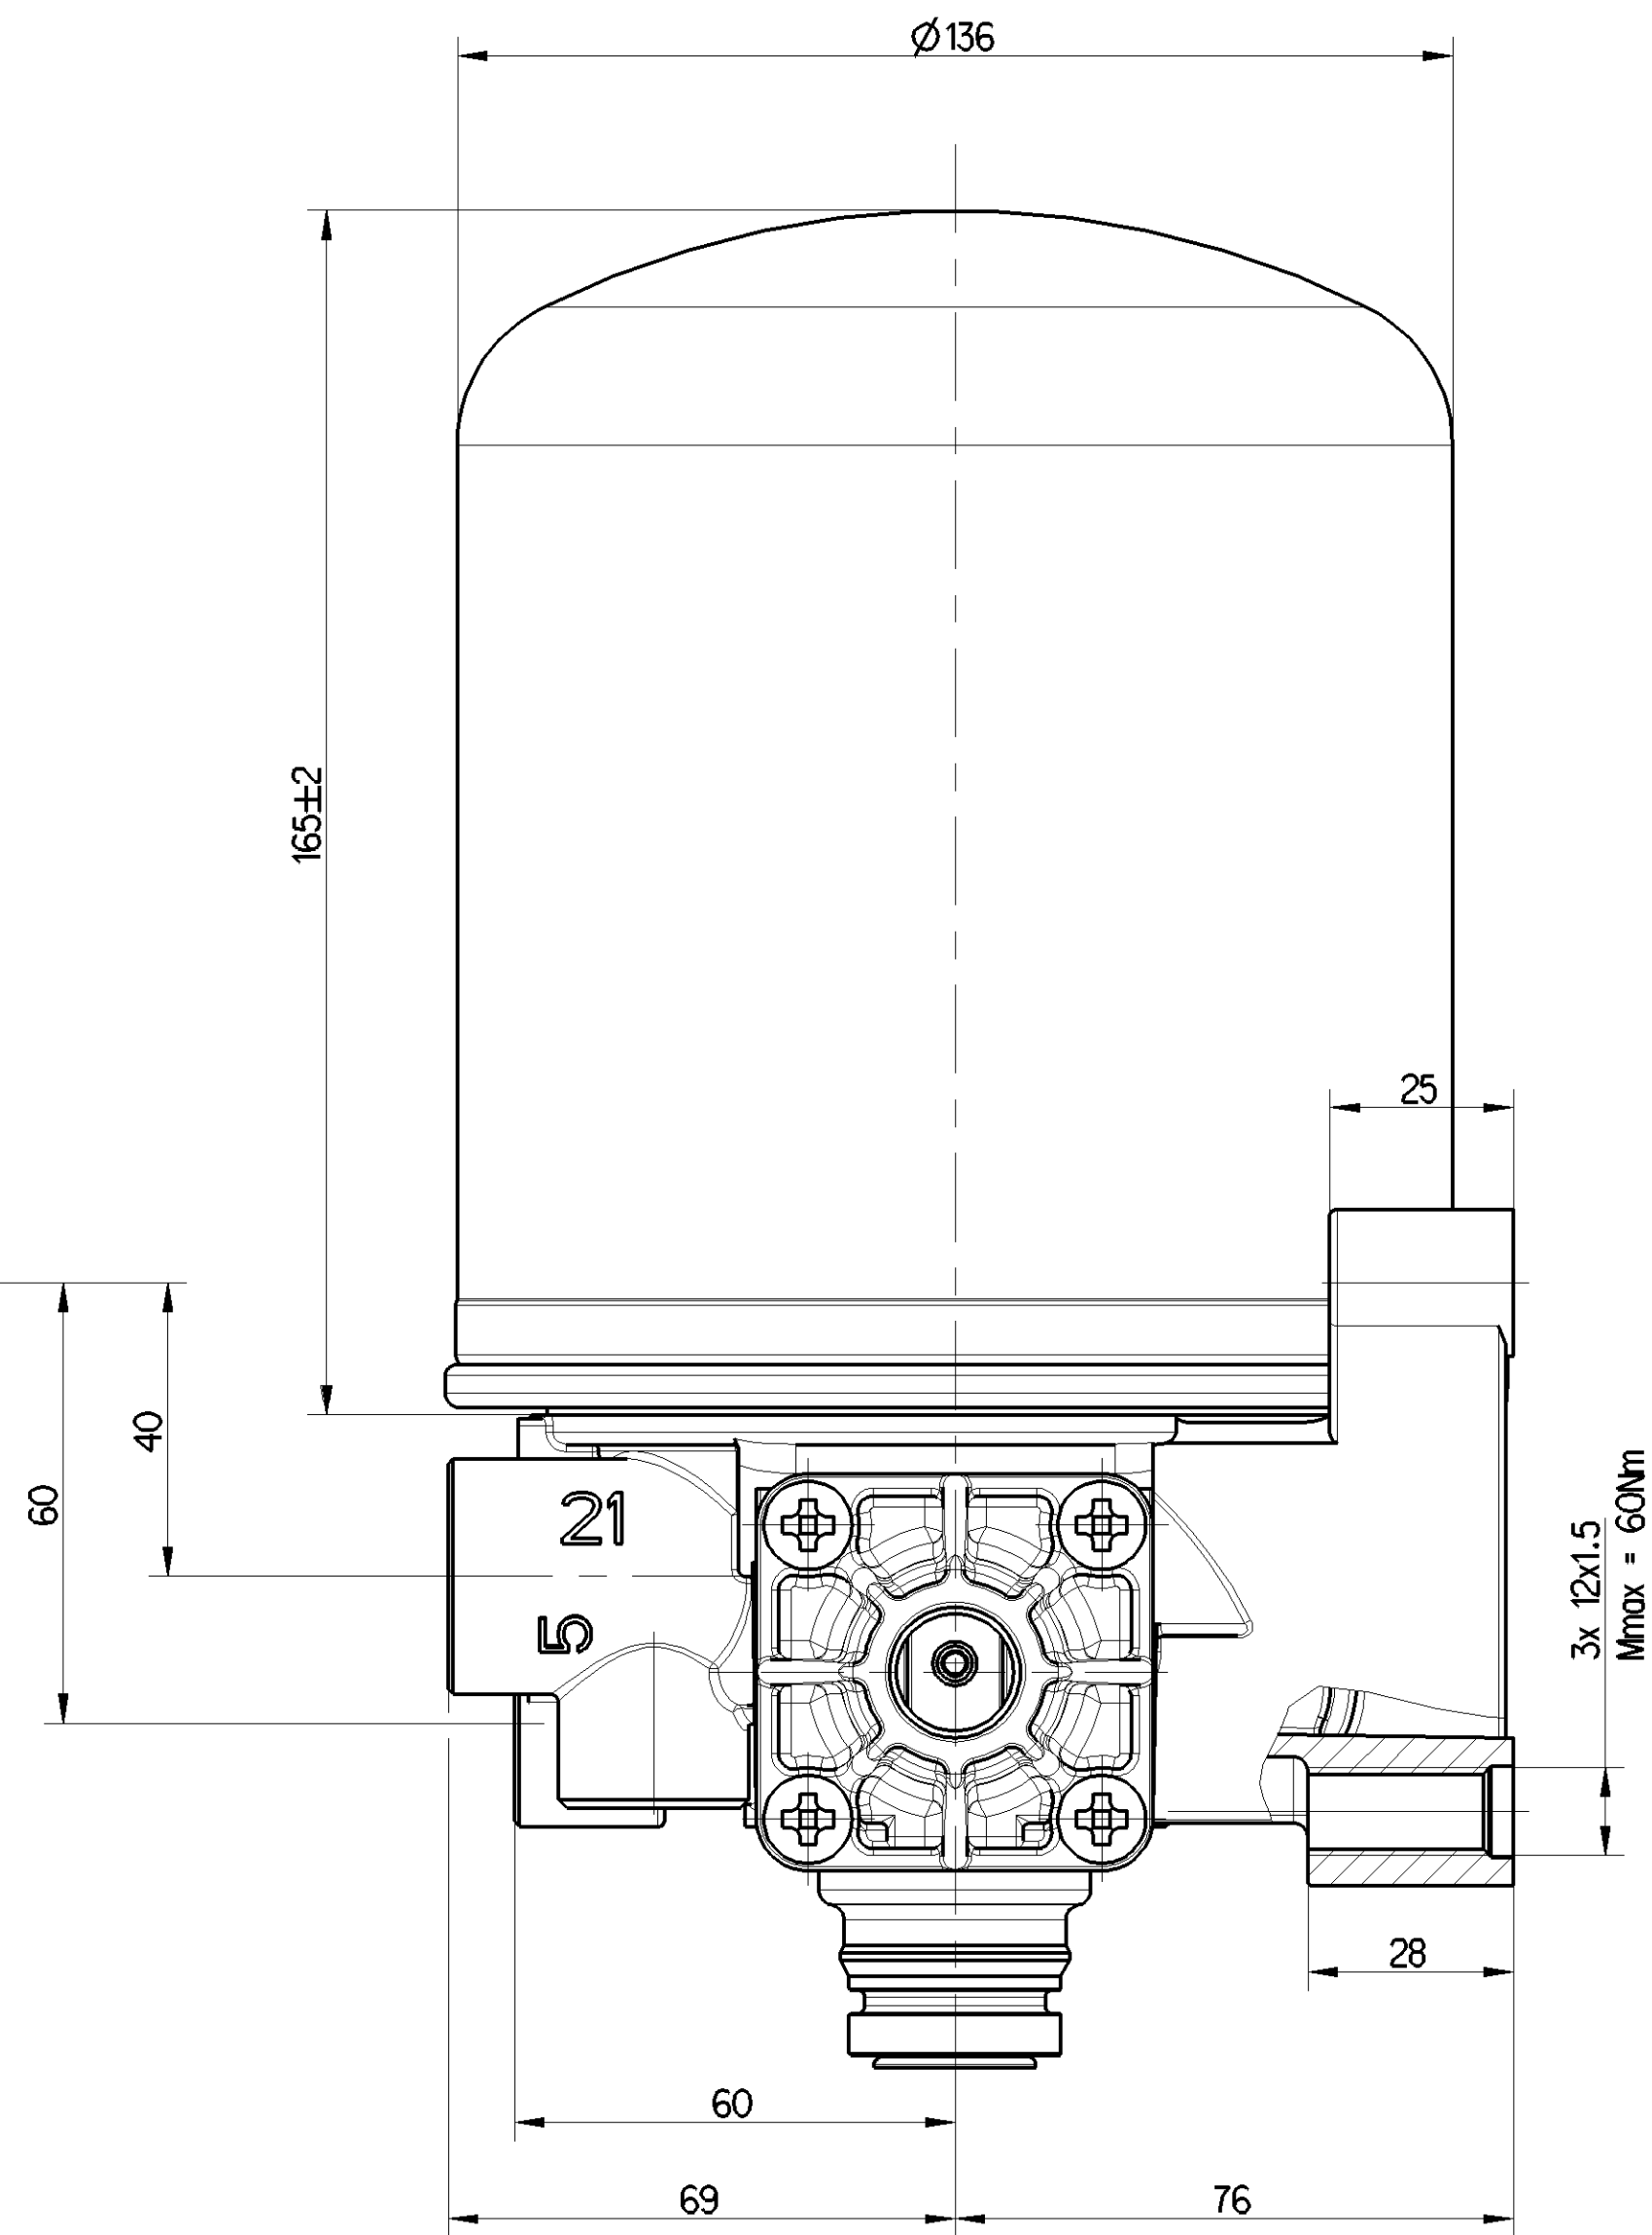
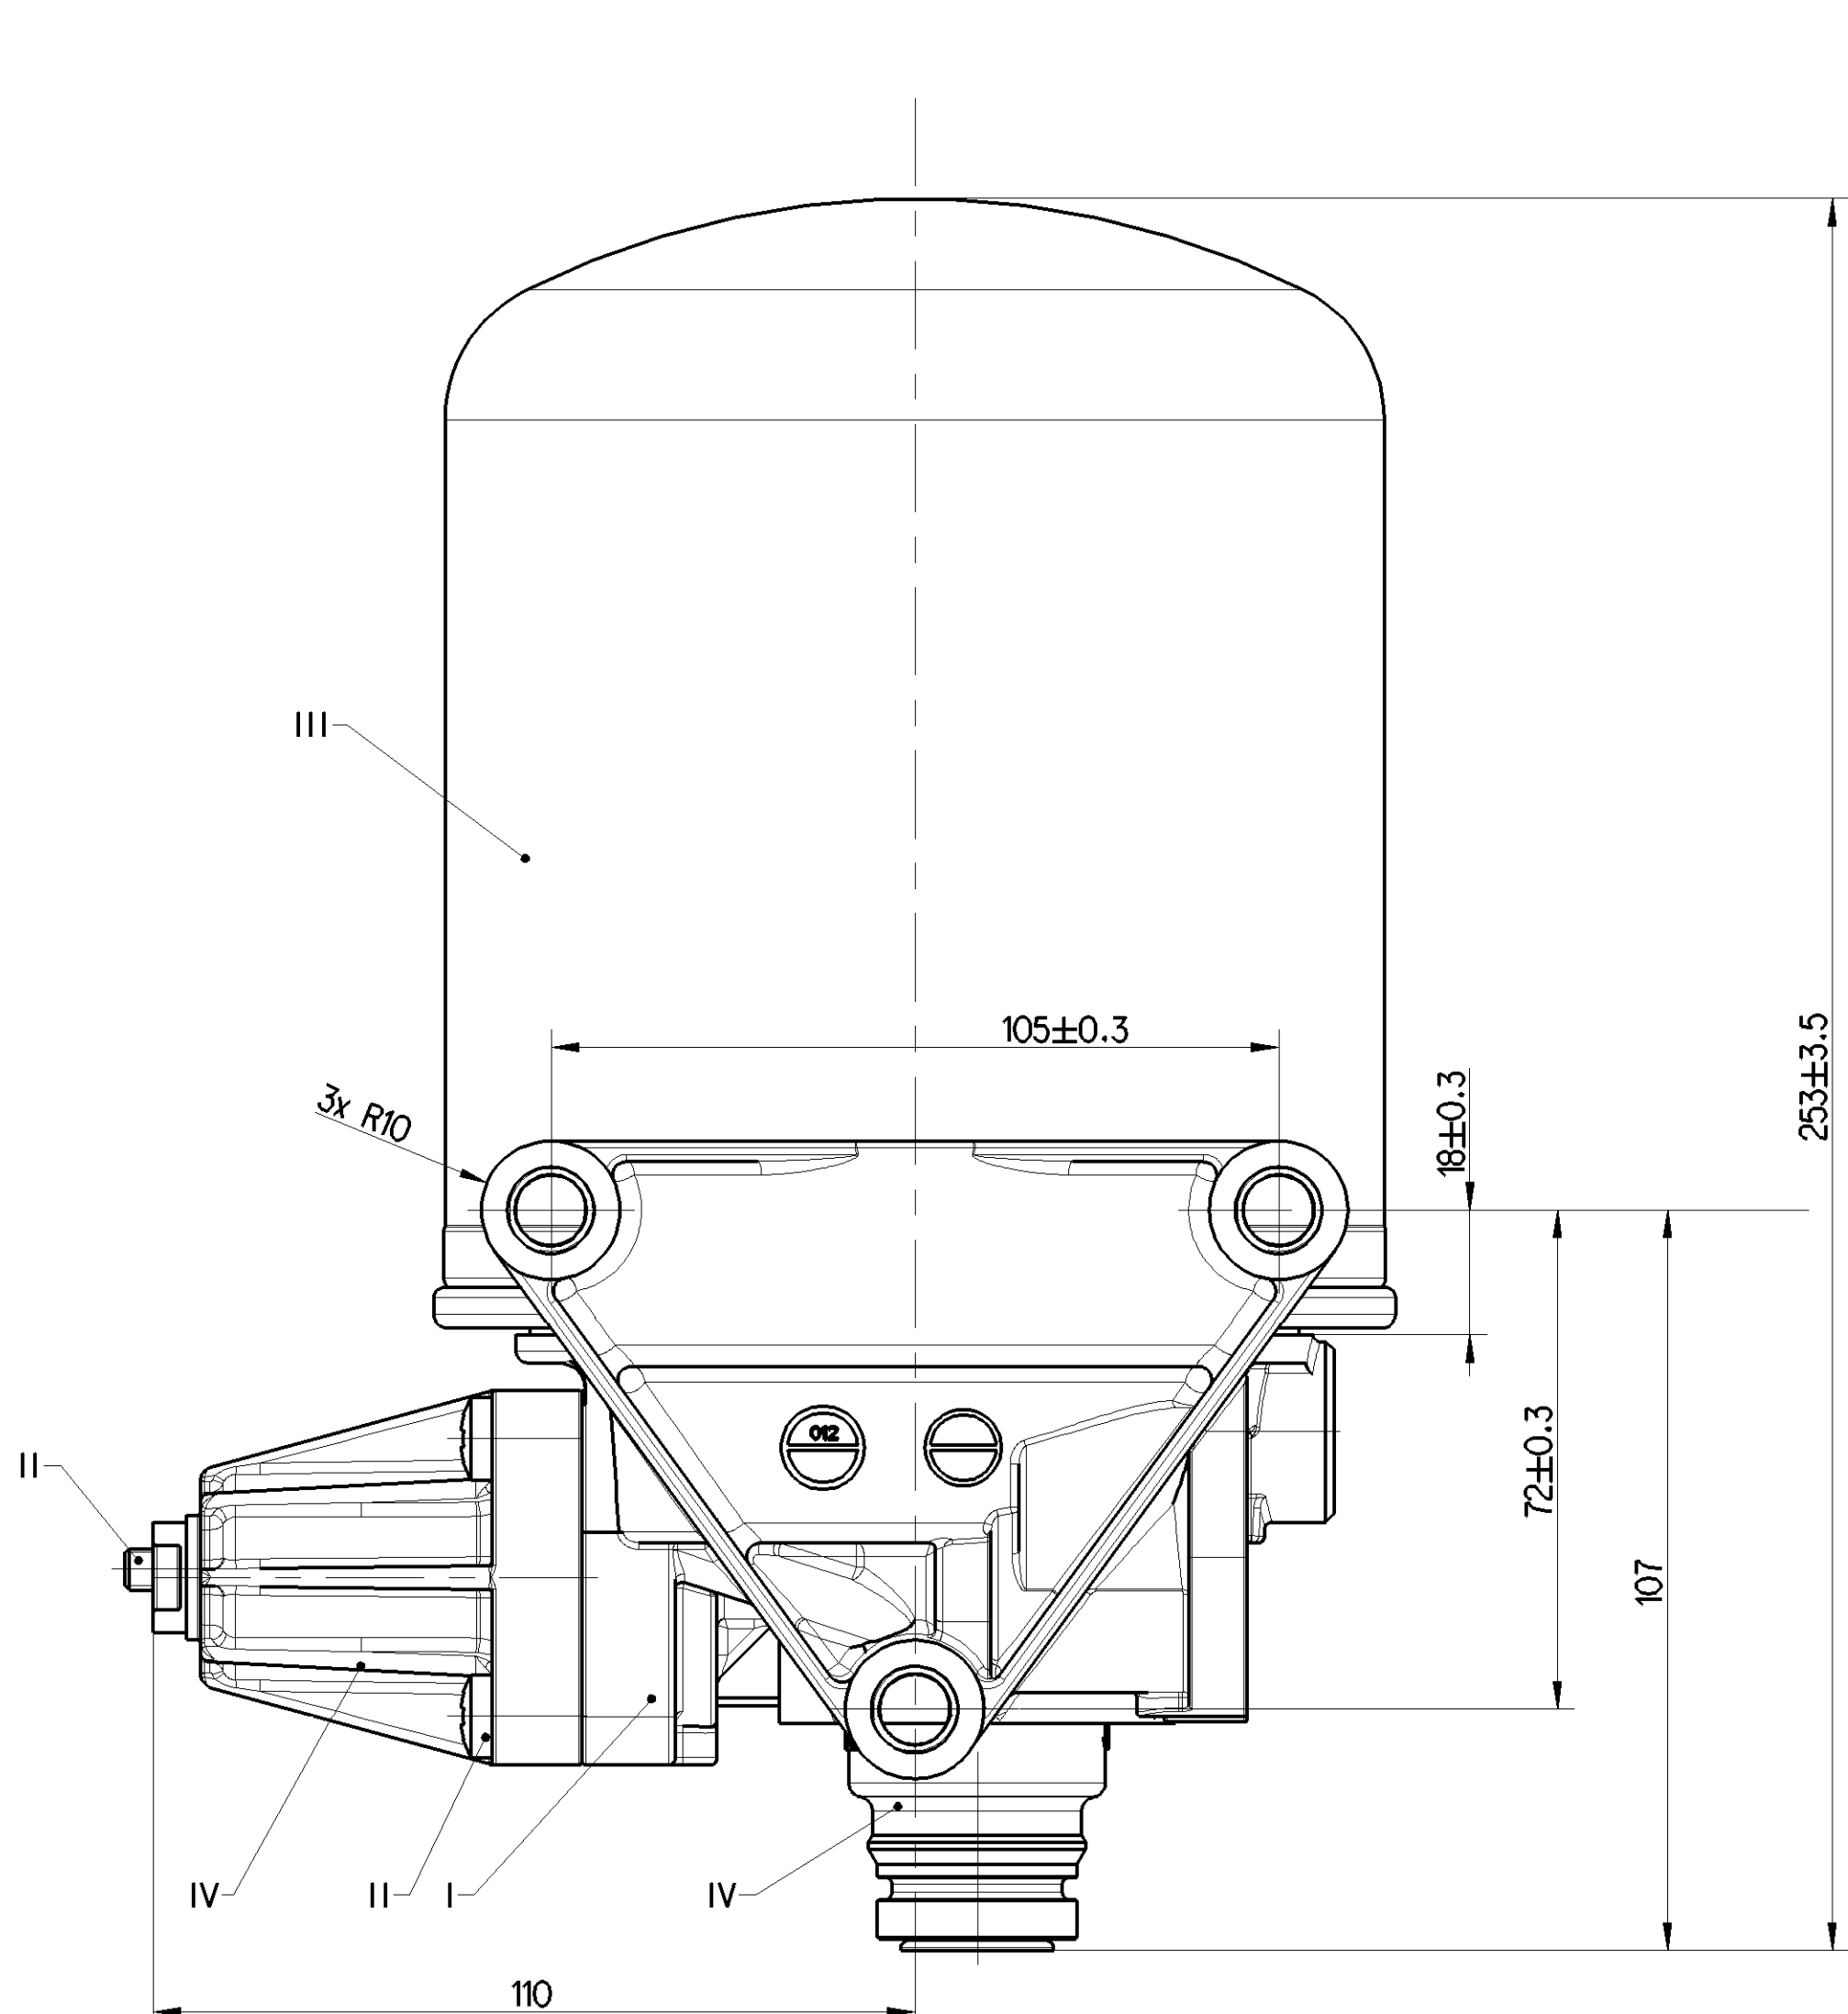
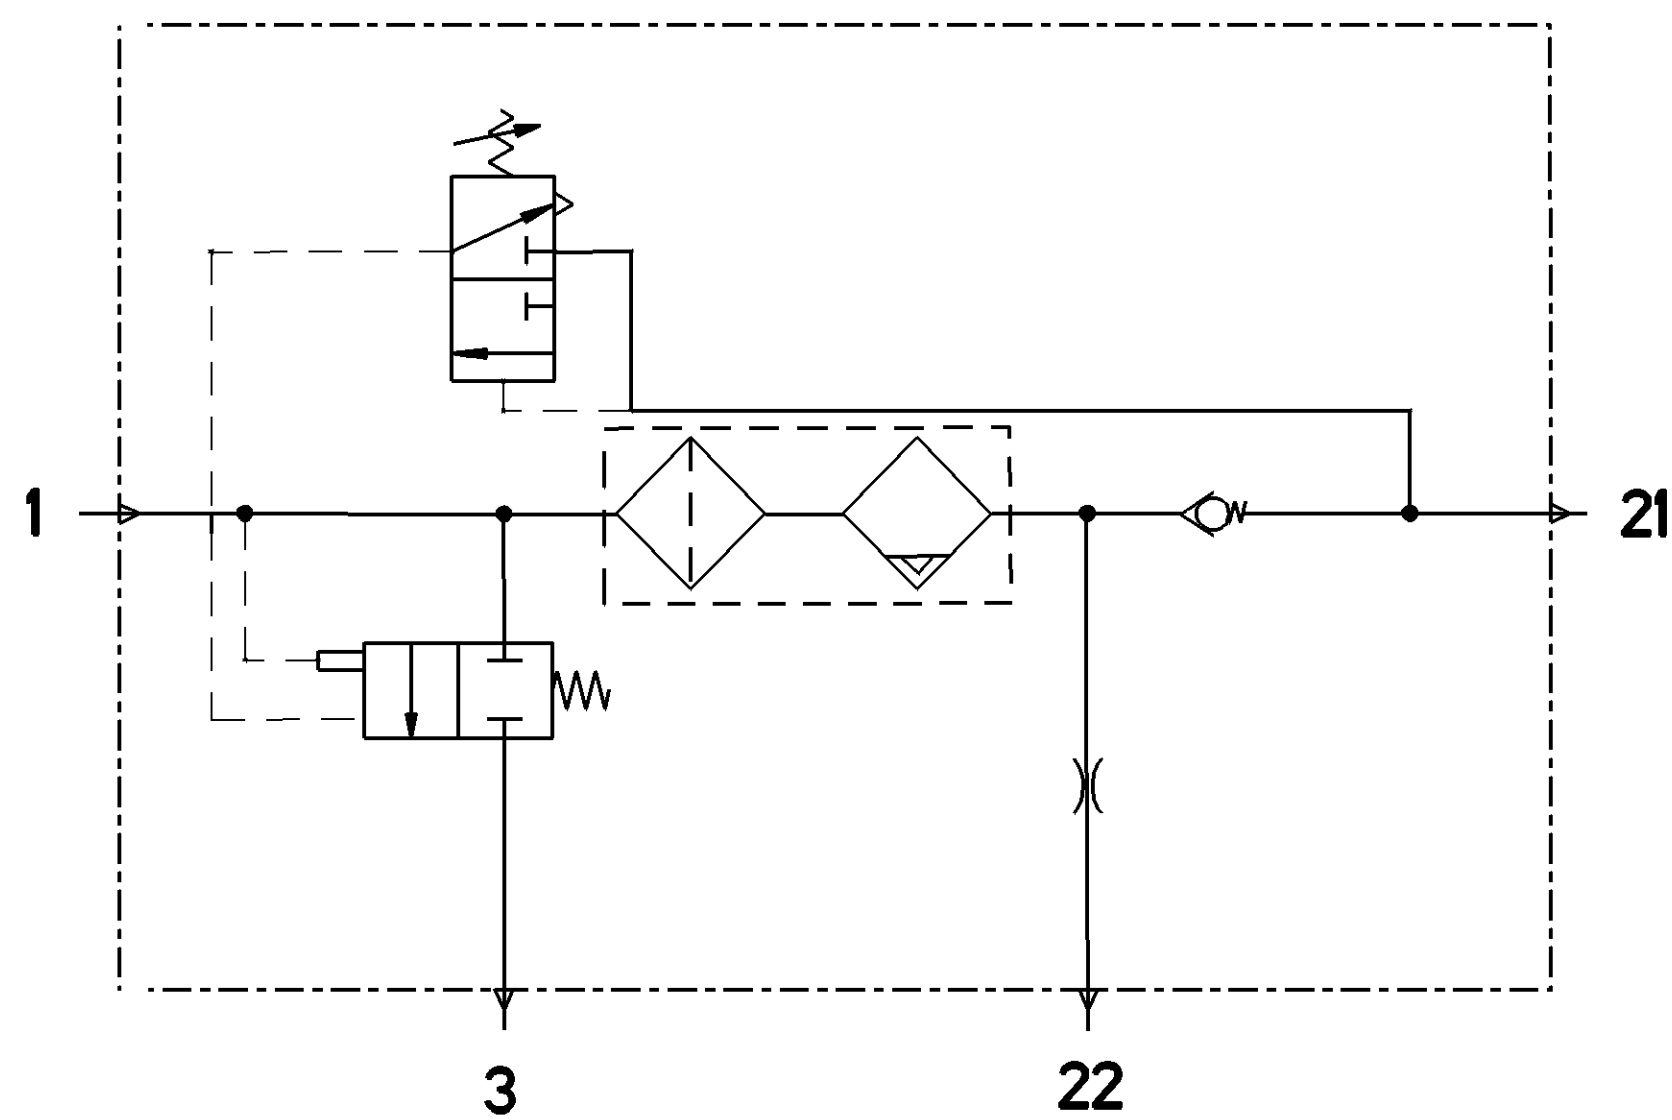


PART CODE	MATERIAL	SURFACE PROTECTION
I	ALUMINIUM ALLOY	CHROMATED
II	STEEL	ZINK PLATED
III	STEEL	PAINTED
IV	PLASTIC	NO TREATMENT
V	ALUMINIUM	ANODIC OXIDATION

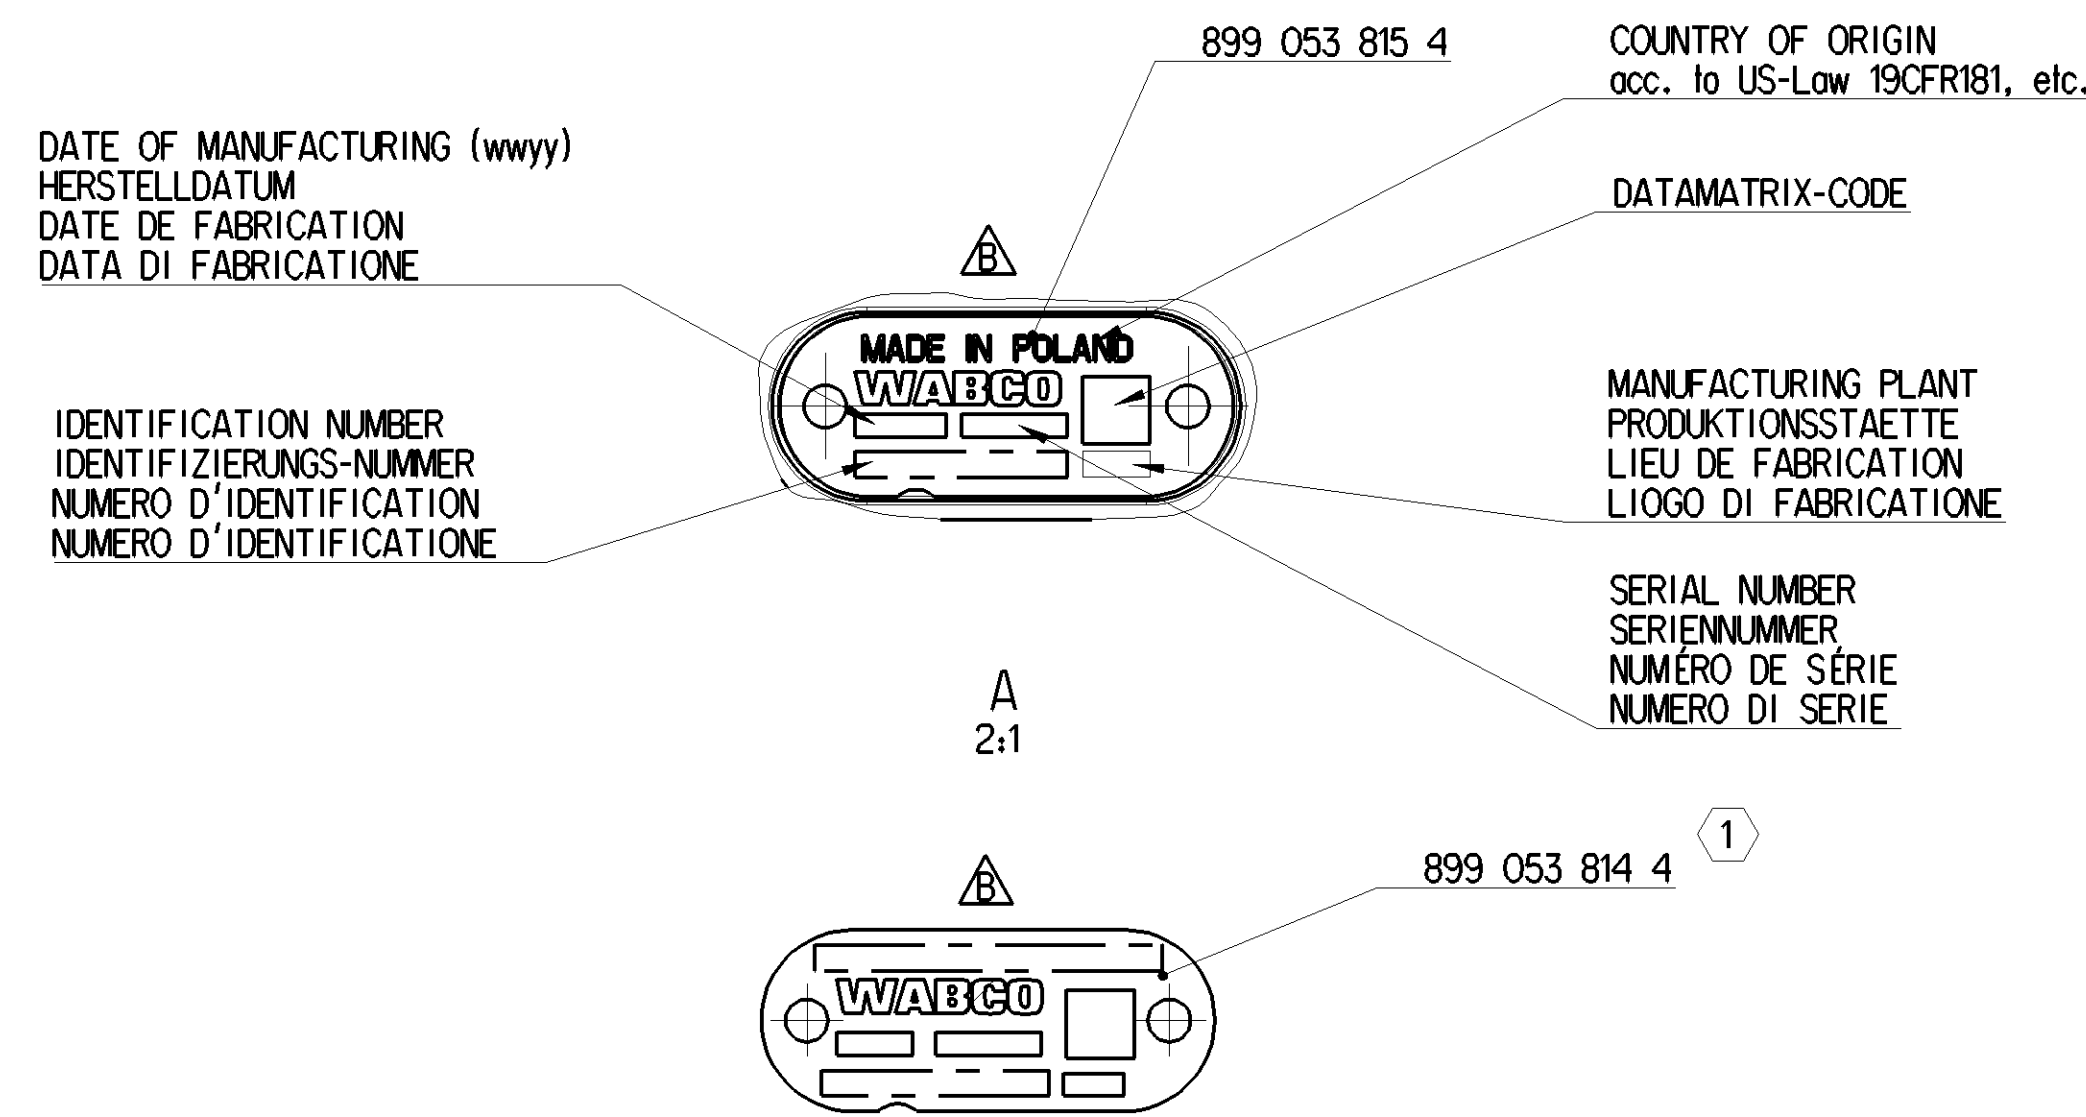


TECHNICAL DATA, TECHNISCHE DATEN, CARACTERISTIQUES TECHNIQUES, CARATTERISTICHE TECNICHE

THERMAL RANGE OF CONTINUOUS APPLICATION: TERMISCHER DAUERANWENDUNGSBEREICH: PLAGE DE TEMPERATURE EN UTILISATION CONTINUE: COMPO DI APPLICAZIONE CONTINUA:	-40°C... +65°C
RESISTANCE TO HEAT: WÄRMEBESTÄNDIGKEIT: RESISTANCE A LA CHALEUR: RESISTANZA AL CALORE:	+80°C MAX
MEDIUM: COMPRESSED AIR MEDIUM: DRUCKLUFT FLUIDE: AIR COMPRIME FLUIDO: ARIA COMPRESSA	
WORKING PRESSURE: BETRIEBSDRUCK: PRESSION DE SERVICE: PRESSIONE D'ESERCIZIO:	Pe MAX=13 bar
MAX. PERMISSIBLE FREQUENCY MAX. ZULÄSSIGE FREQUENZ MAX. ADMISSIBLE FREQUENCE MAX. AMMISSIBILE FREQUENZA	50 Hz
MAX. PERMISSIBLE ACCELERATION MAX. ZULÄSSIGE BESCHLEUNIGUNG ACCELERATION MAX. ADMISSIBILE ACCELERAZIONE MAX. AMMESSA	±10x g
COMBINED UNLOADER: DRUCKREGLER: REGULATEUR DE PRESSION: GRUPPO DI REGOLAZIONE:	
OUT OUT PRESSURE: ABSCHALTDRUCK: PRESSION D'OUVRETURE: PRESSIONE D'APERTURA:	8.5±0.2 bar
OPERATING RANGE: SCHALTSPANNE: PLAGE DE REGULATION: GAMMA DI REGOLAZIONE:	0.6 ^{+0.4} ₀ bar
DYNAMIC PRESSURE OF SAFETY VALVE: STAUDRUCK DES SICHERHEITSVENTILES: PRESSION DYNAMIQUE DU SOUPAPE DE SECURITE: PRESSIONE DINAMICA DELLA VALVOLA DI SICUREZZA:	10 ⁻⁴ 0 (BEI $\dot{V}_n=100dm^3/min.$)
TORQUES FOR CONNECTIONS: ANZUGSMOMENT FÜR EINSCHRAUBSTUTZEN: COUPLE DE SARRAGE DES RACCORDS: COPPIA DI SERRAGGIO DEI RACCORDI:	M16x1.5: Mmax = 34 Nm M22x1.5: Mmax = 53 Nm

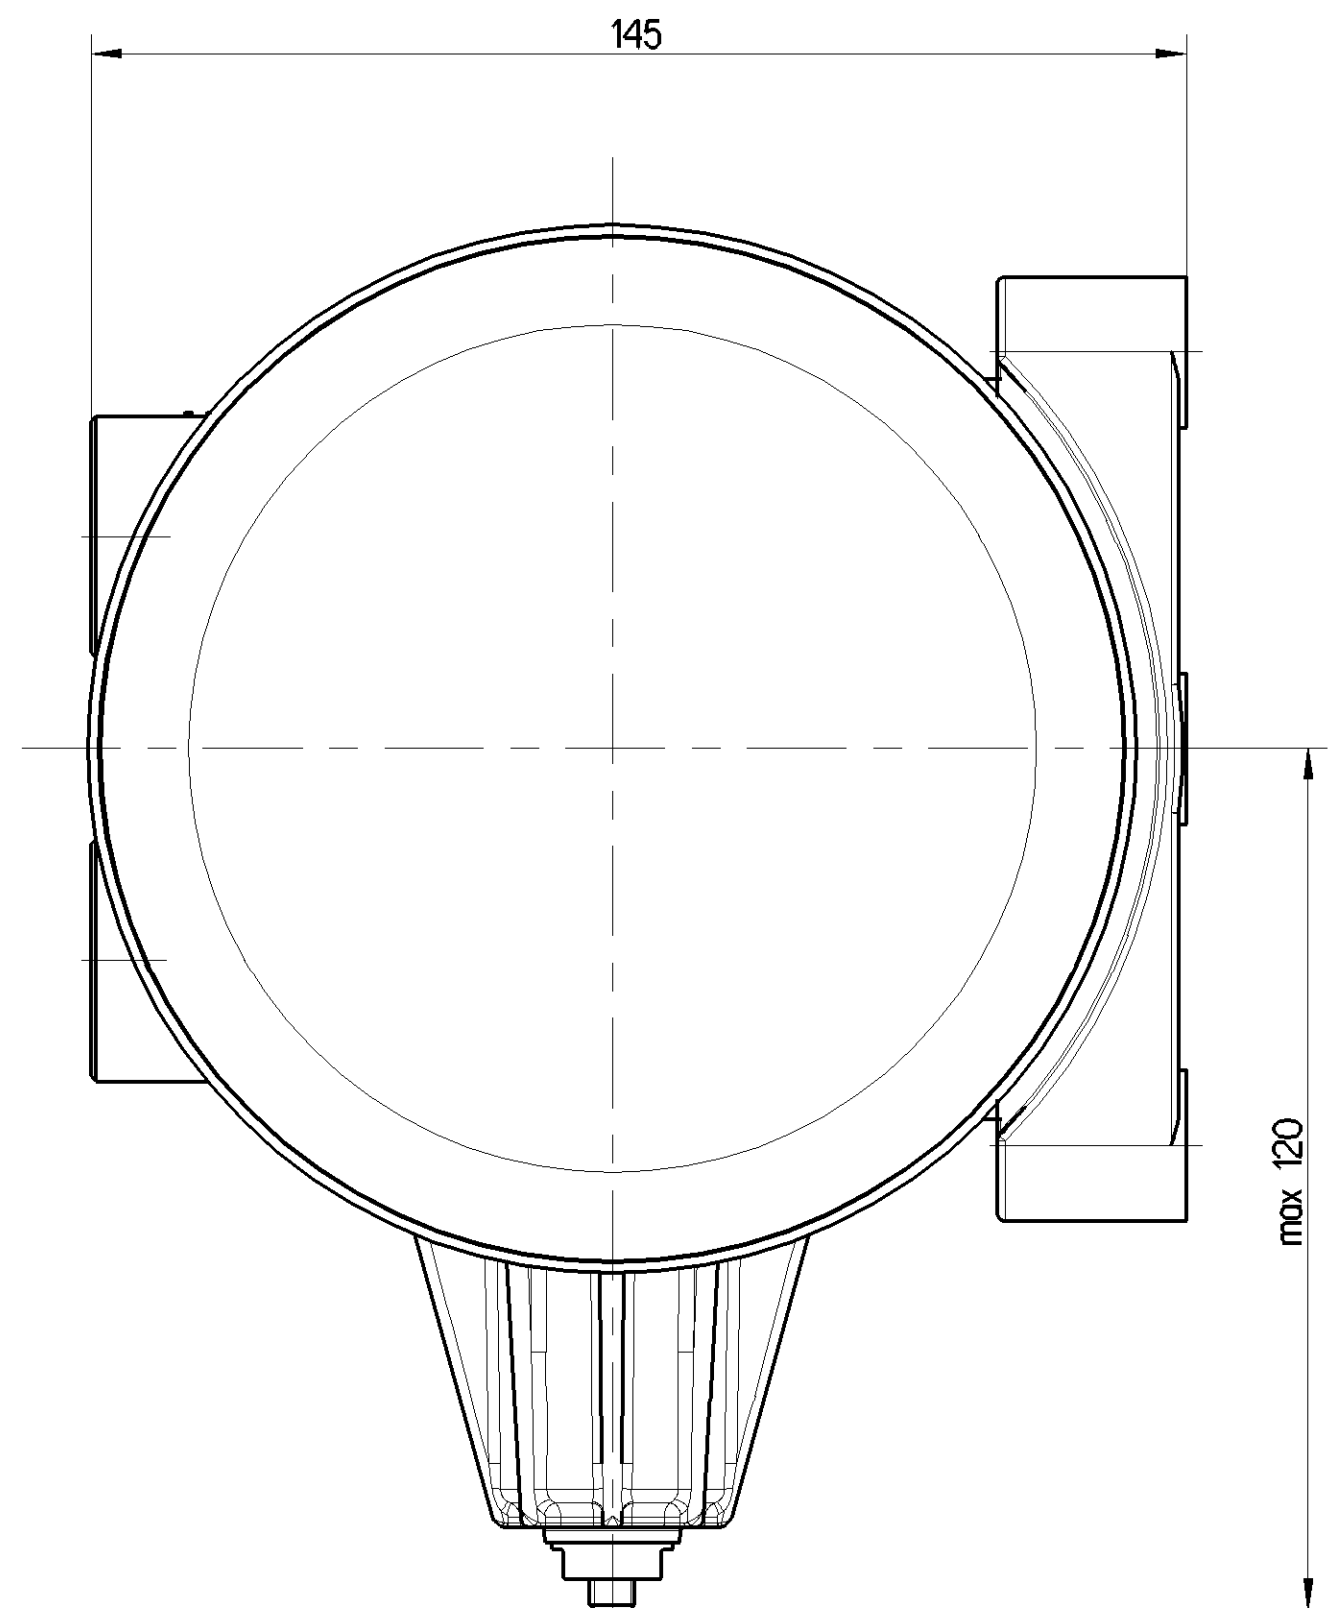

PORT ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNCTION FONCTION FUNZIONE	THREAD GEWINDE FILETTAGE FILETTATURA
1 ②	FROM THE COMPRESSOR VOM KOMPRESSOR PROVENANT DU COMPRESSEUR PROVENIENTE DEL COMPRESSORE	M22x1.5 JED-152 d=15
21	TO THE RESERVOIRS ZU DEN LUFTBEHÄLTERN AUX RESERVOIR AL SERBATOII PER	M22x1.5 JED-388
22	TO THE RESERVOIRS FOR REGENERATED AIR ZUM REGENERATIONS-LUFTBEHÄLTNER AUX RESERVOIRS D' AIR REGENERE AL SERBATOII PER L' ARIA RIGENERATA	M16x1.5 JED-388
3	EXHAUST FOR COMPRESSED AIR ENTLUEFTUNG FÜR DRUCKLUFT ECHAPPEMENT POUR AIR COMPRIME SCARICO PER ARIA COMPRESSA	-

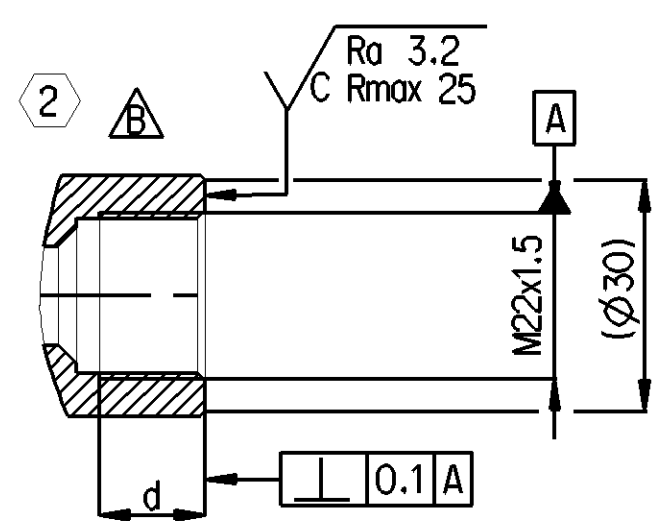

① FOR MAN

① INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D' INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

PERMITTED SILENCER:
FREIGELEGEBENER GERÄUSCHDAEMPFER
SILENCIEUX PERMIS
SILENZIATORE AMMESSO

432 407 012 0

General Specification ISO 8476, JED-534-1, Size ISO 14405 LP		Copyright 2016		Date: 2023-03-28		Signature: Kurzyński		Logo: ZP	
Further Technical Data: Product Specification		Doc. Code: 0355		Sheet: 1		To: 4		Date of first issue: 2014-11-05	
Class: 11		± 50		± 180		± 400		± 400	
Fine		±0.05		±0.1		±0.15		±0.2	
Medium		±0.1		±0.2		±0.3		±0.4	
Coarse		±0.2		±0.35		±0.5		±0.65	
Tapped Holes acc. JED-152 / JED-388		ISO 8476		ISO 14405 LP		ISO 14405 LP		ISO 14405 LP	
① Tolerance class: Special (assumed)		A 0		CERO		SC245		4 x 8	
432 410 115 0		005		ML		1/1		REMOVED FROM 432407010	