
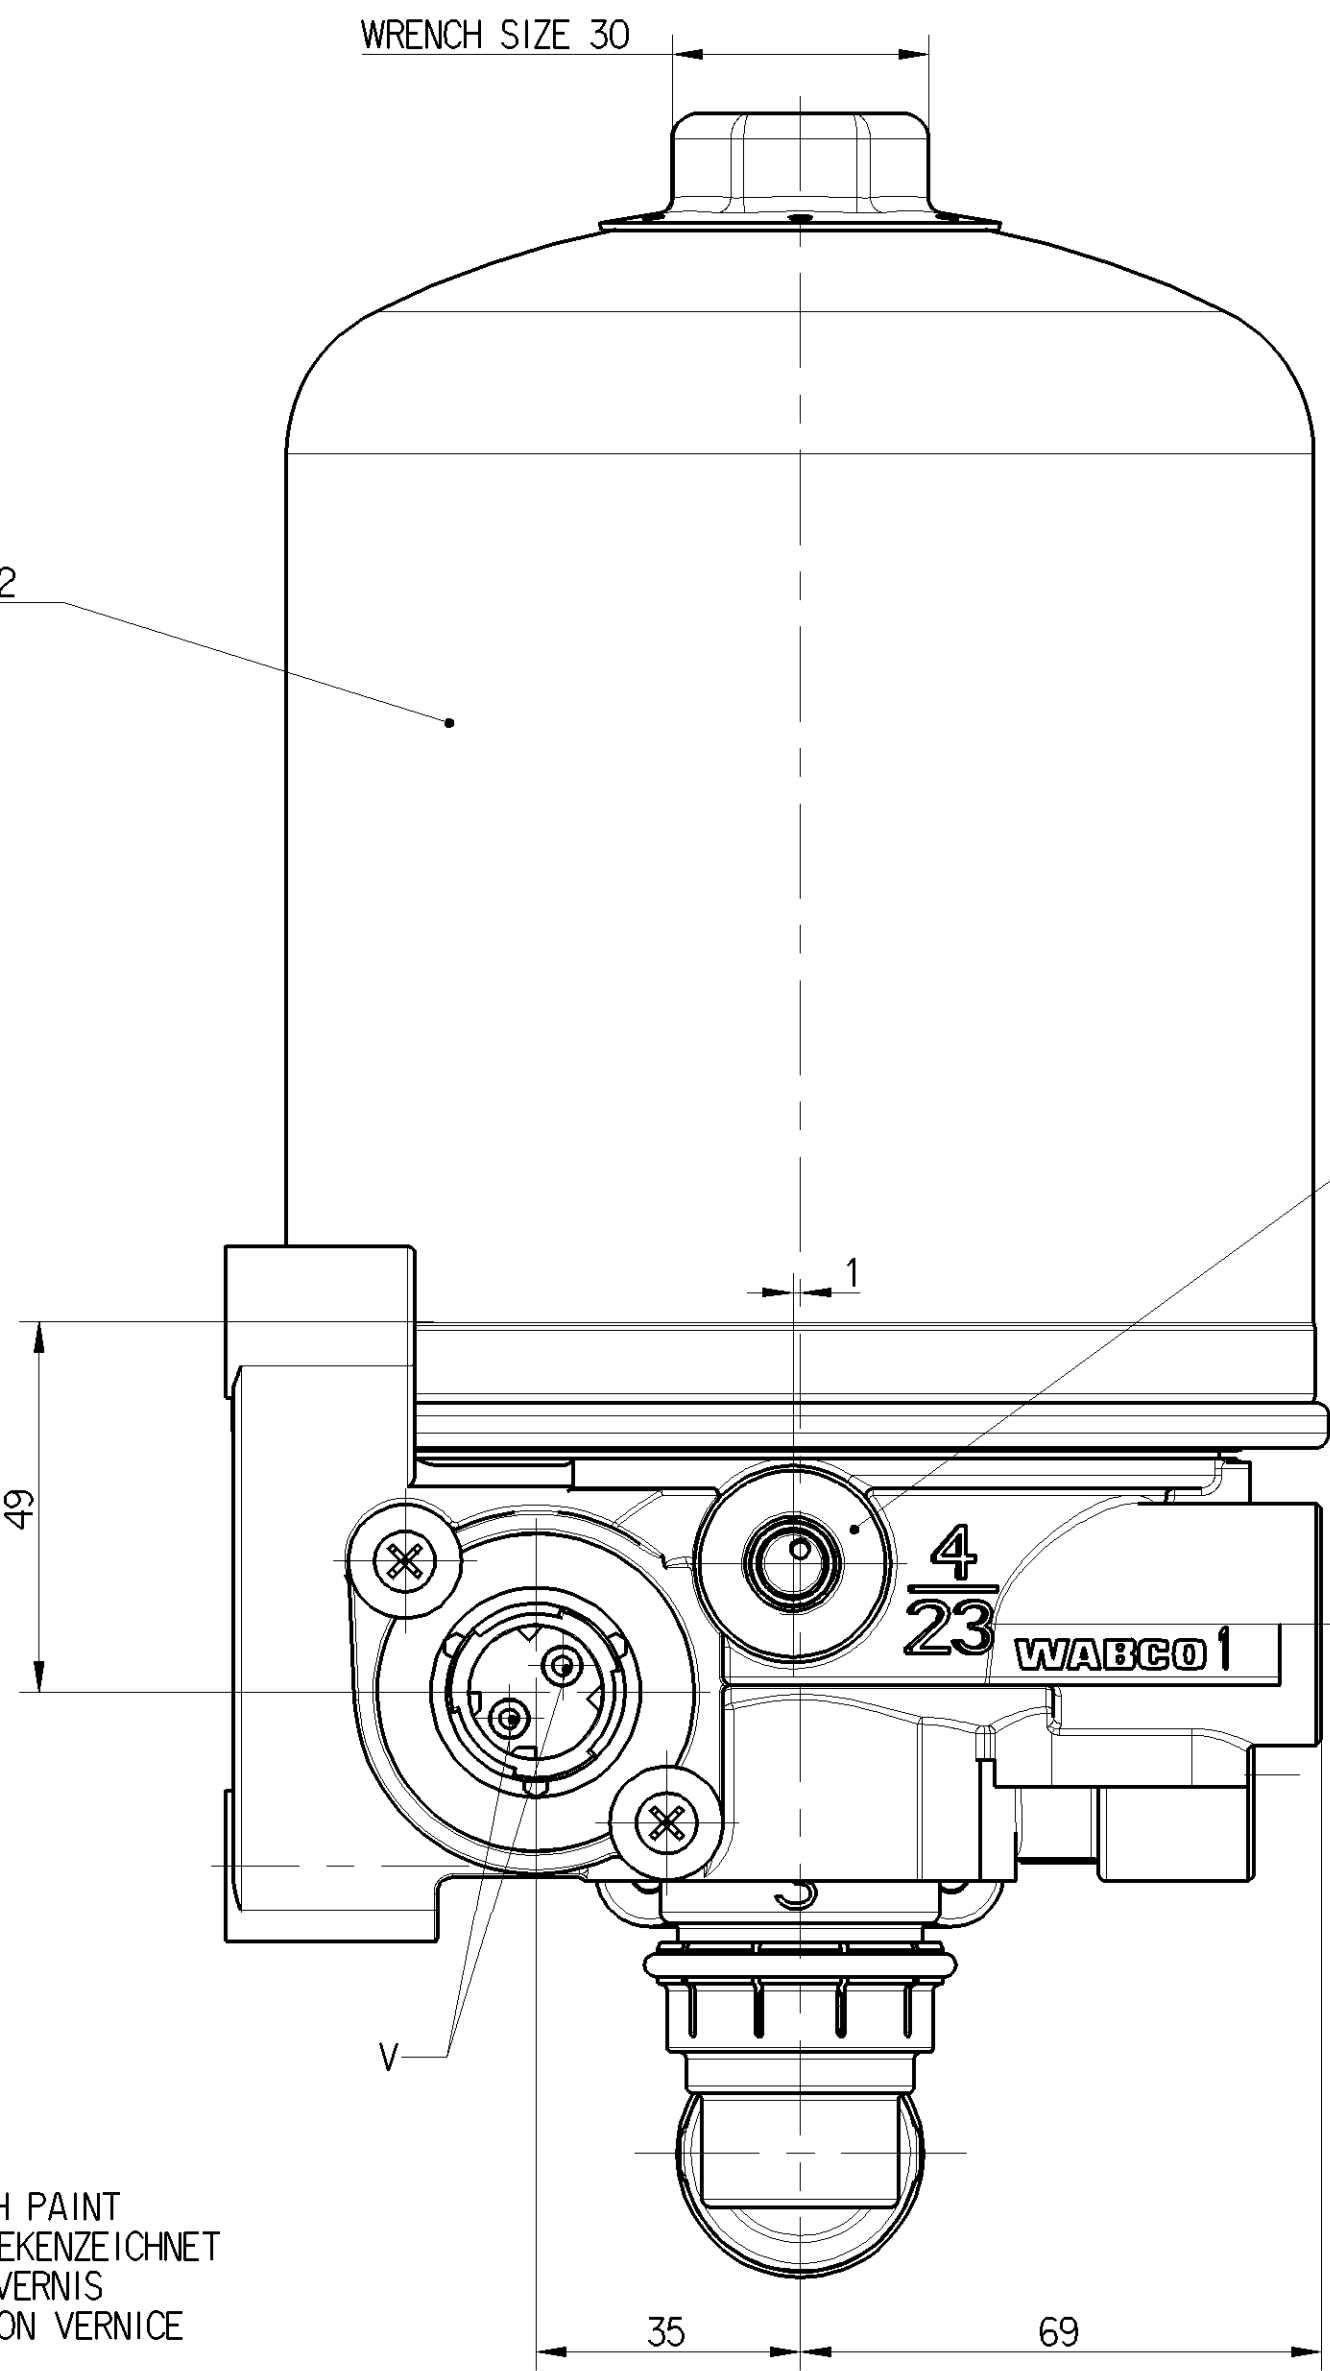
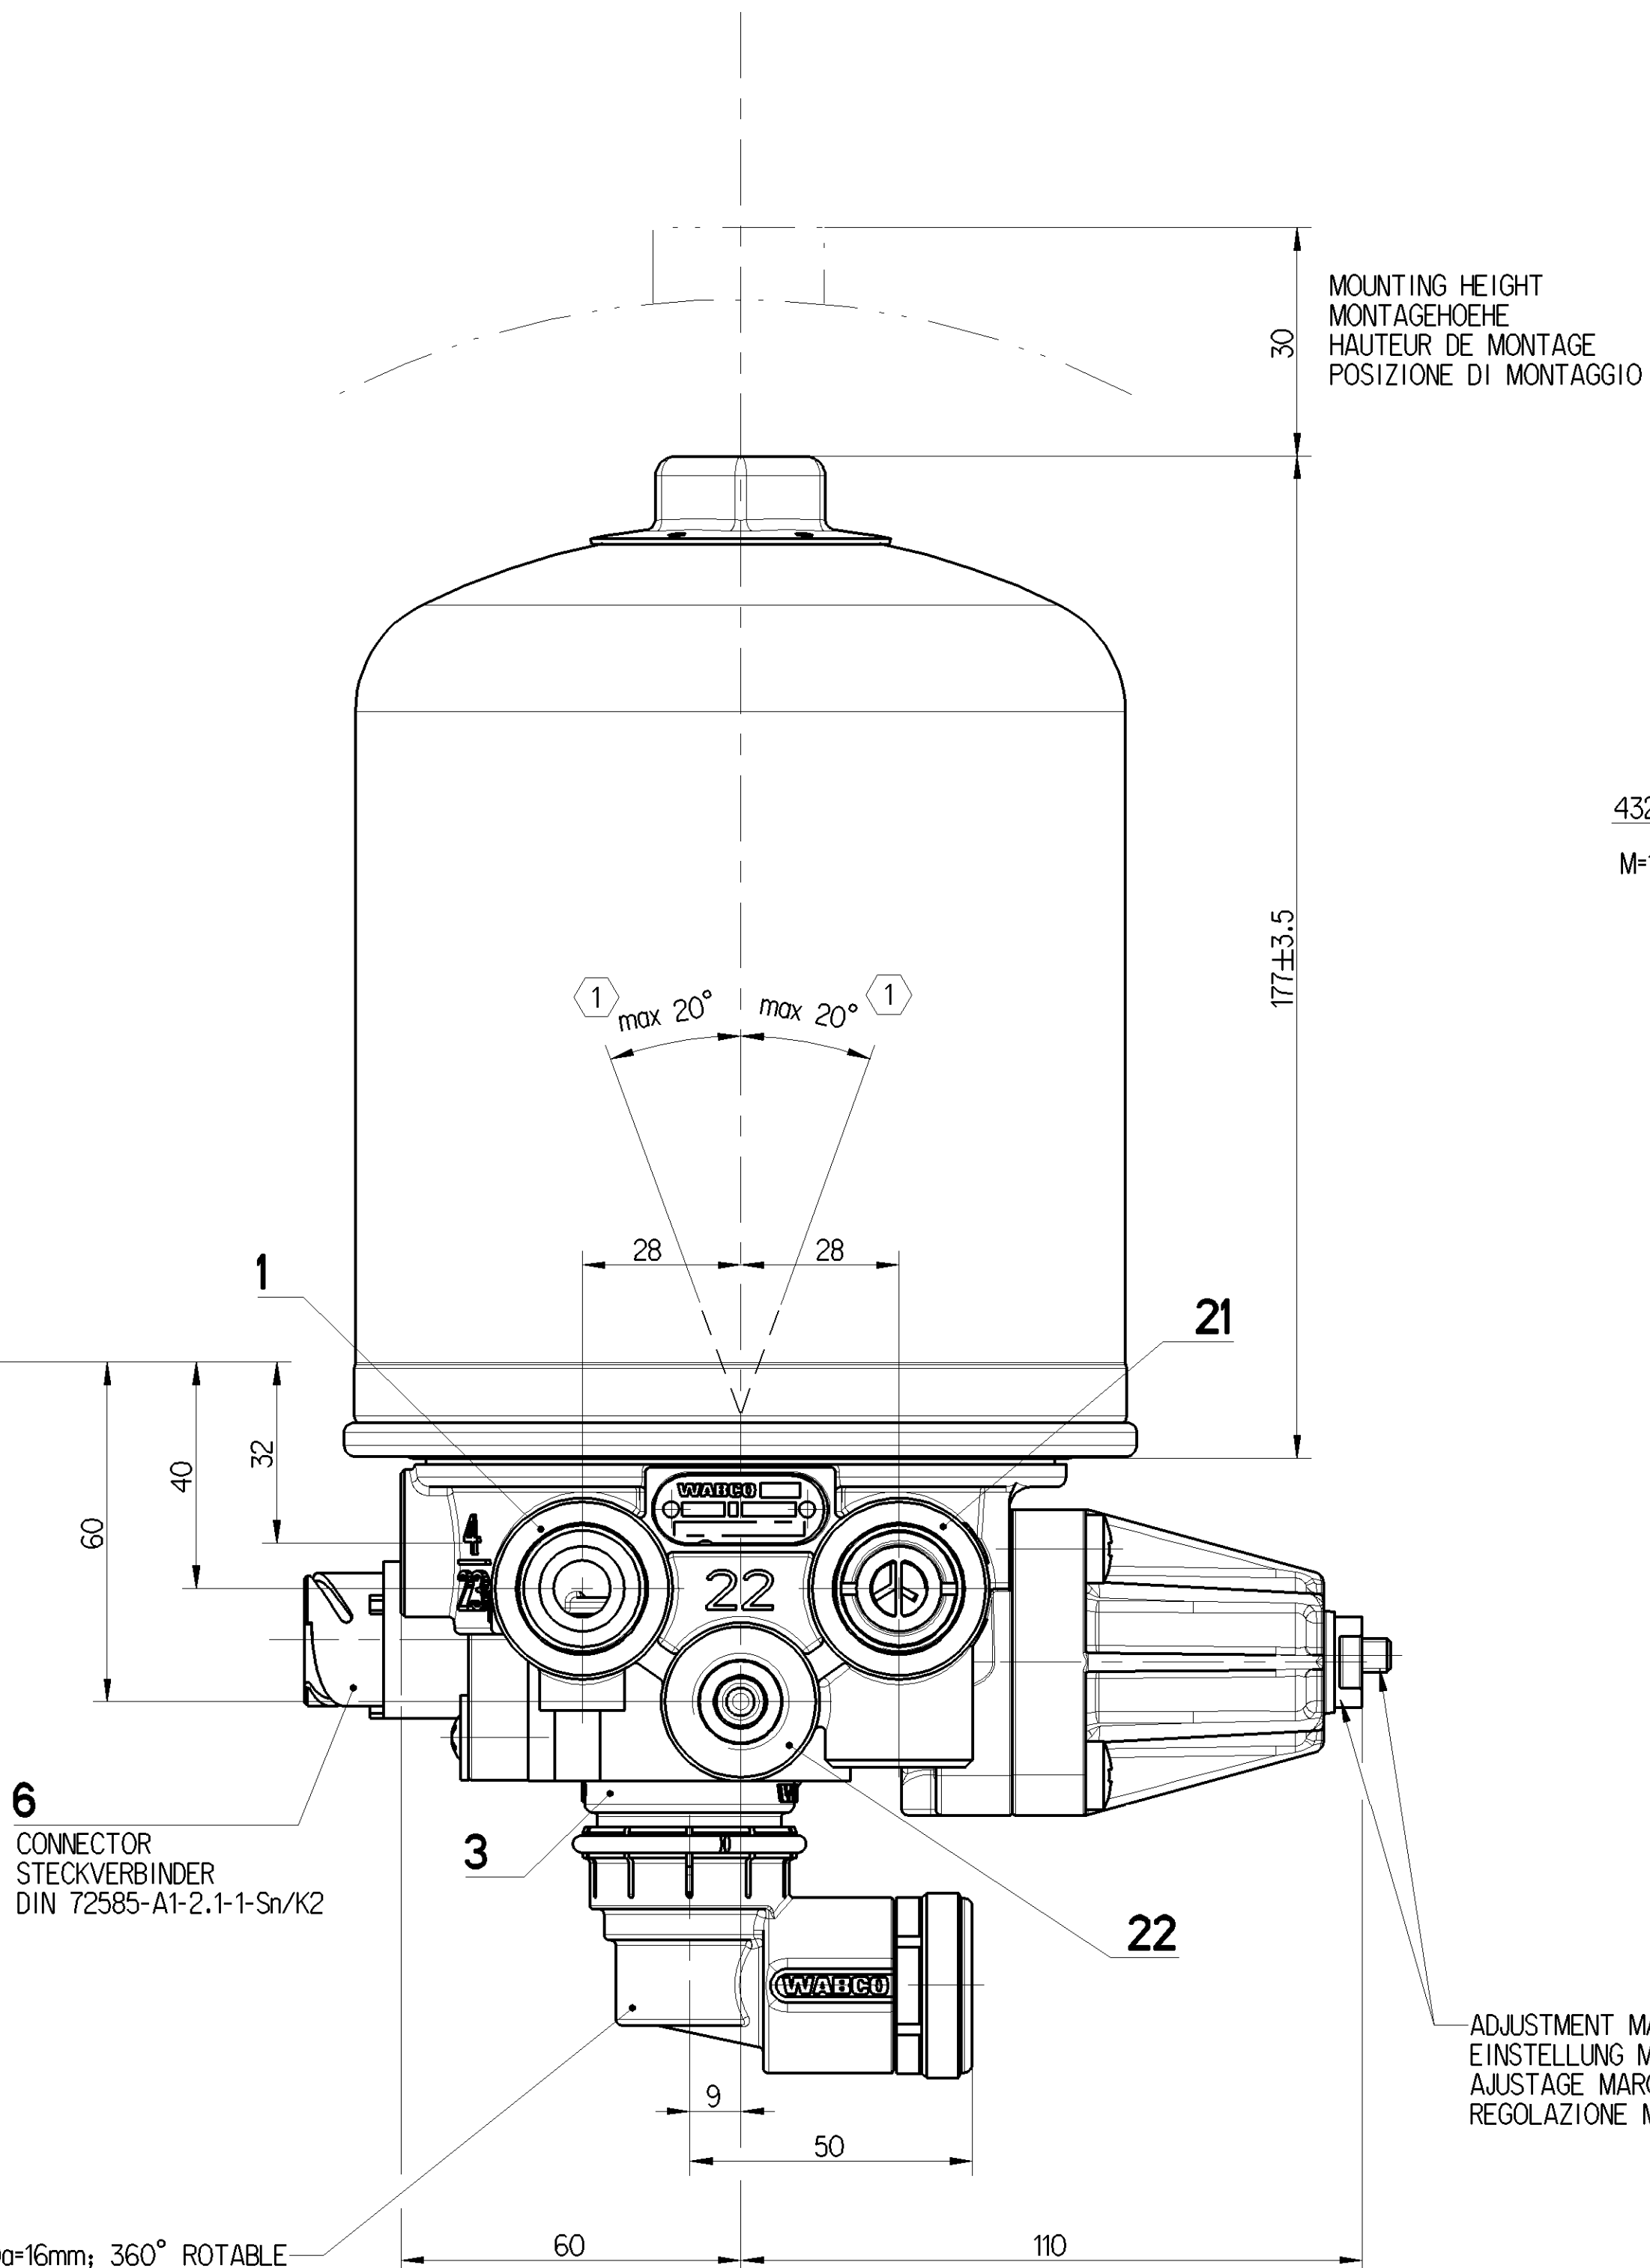
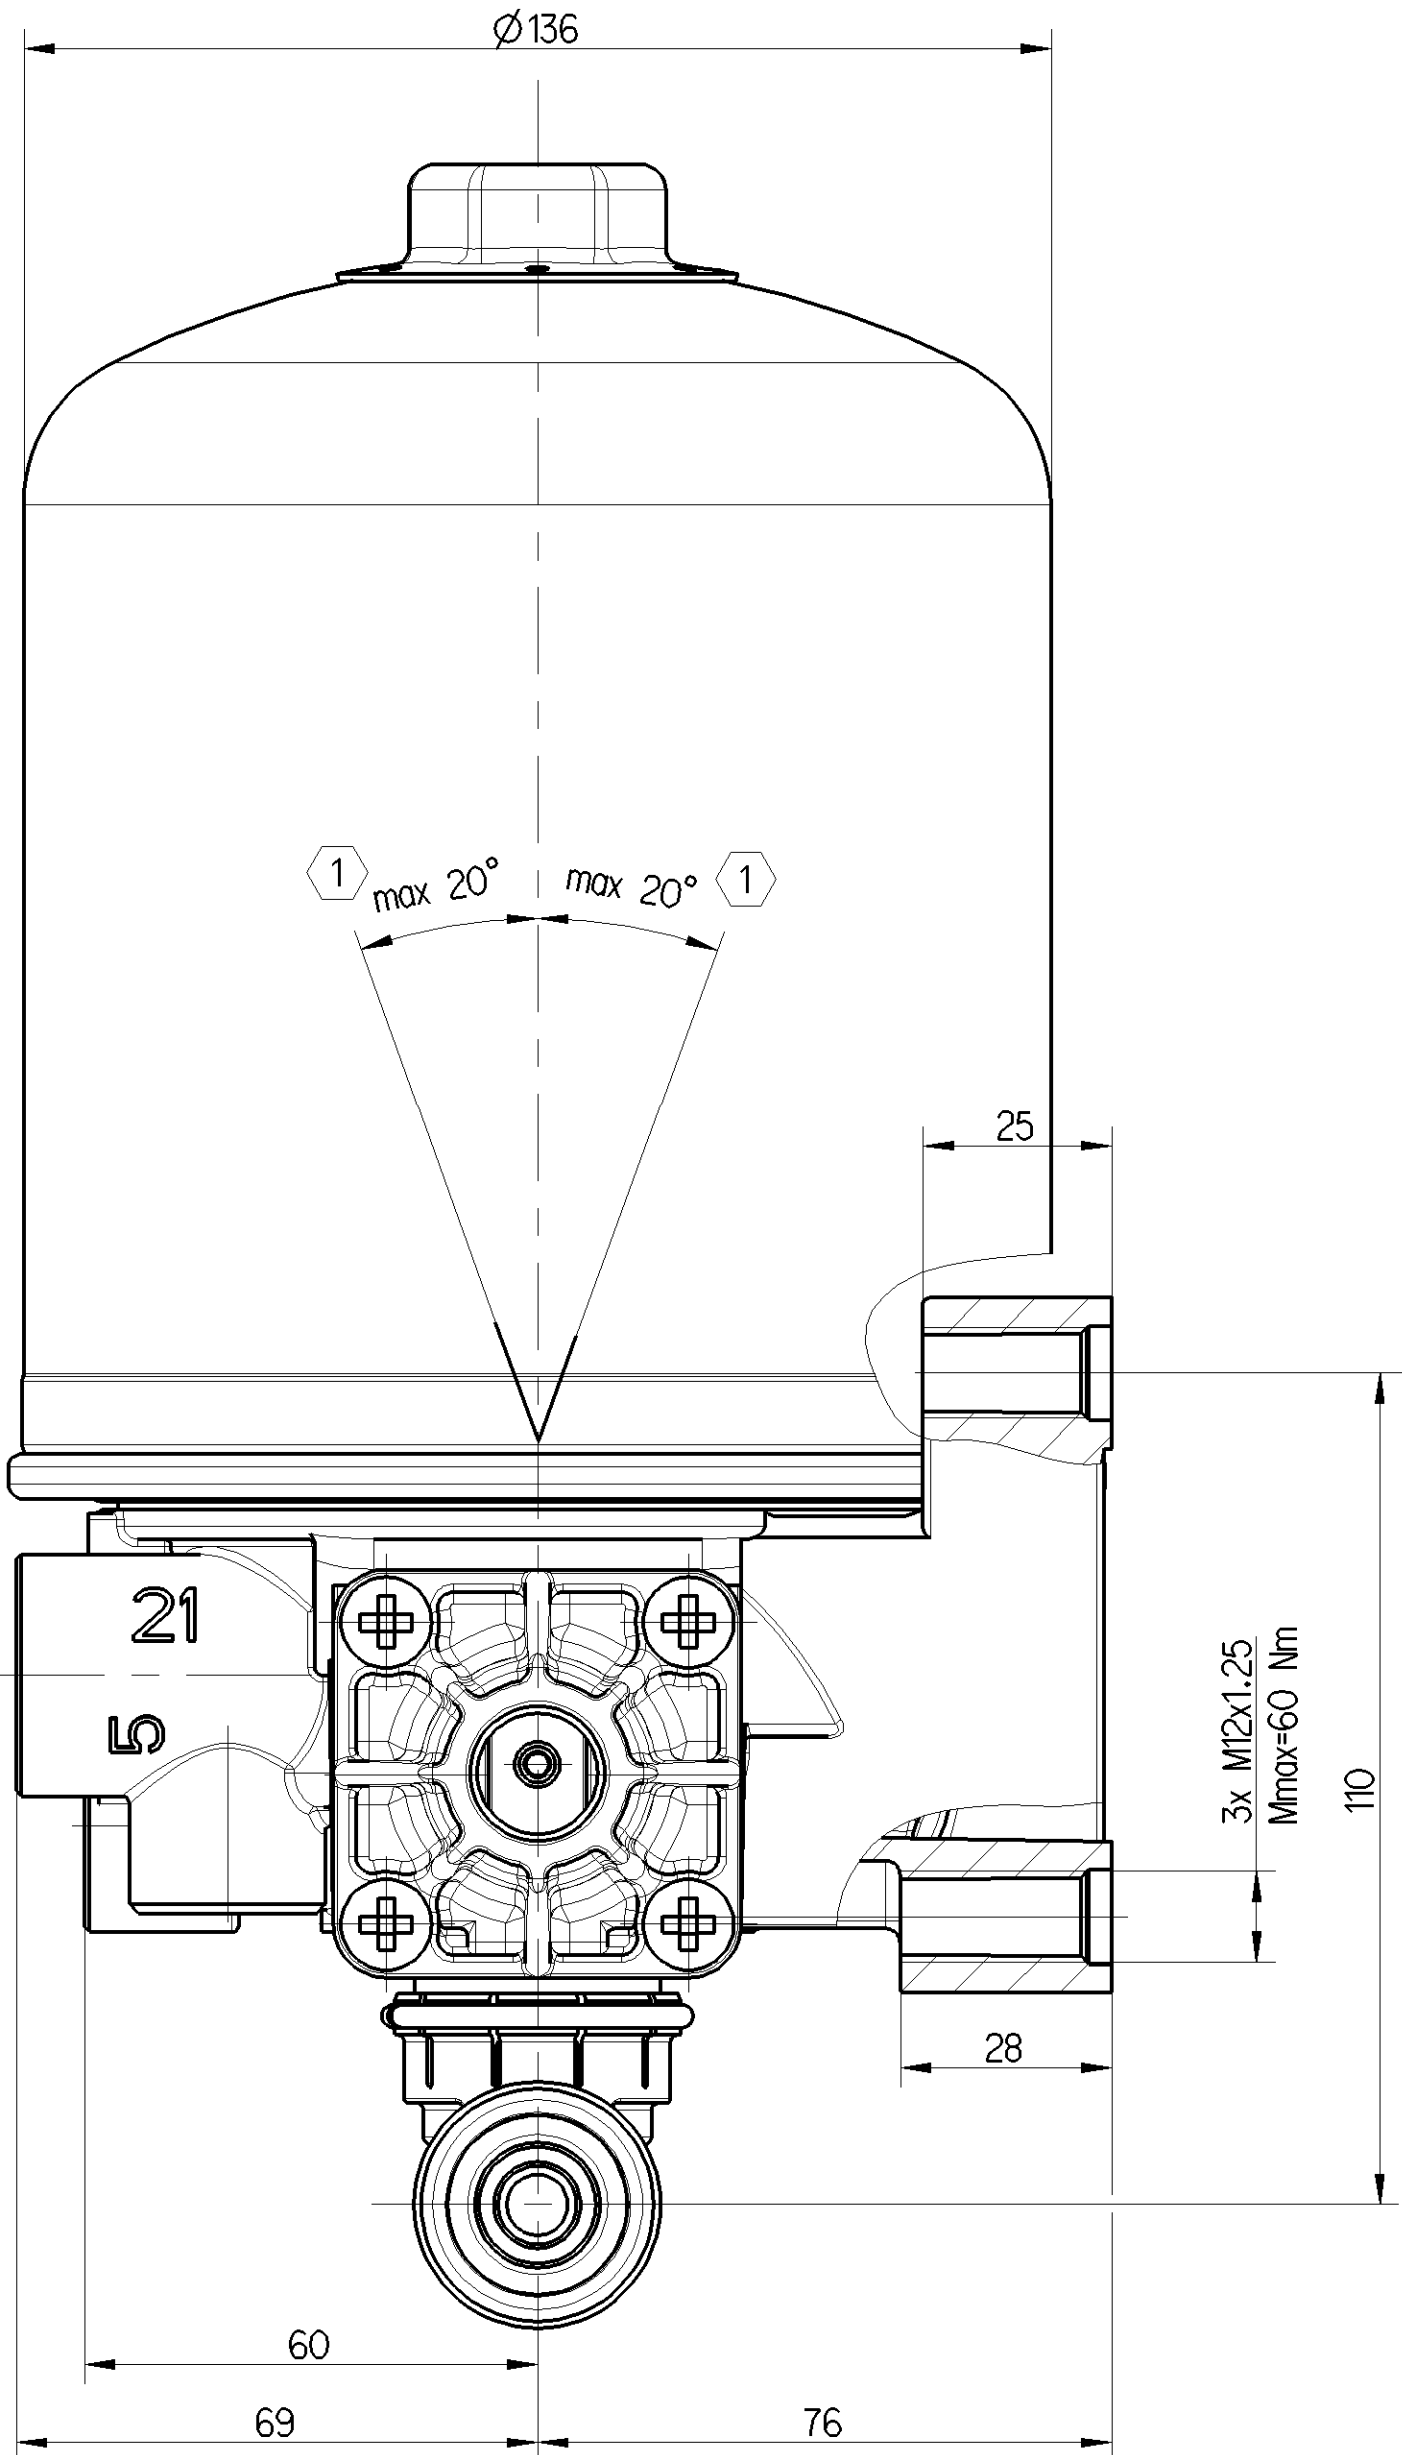


EXTERNAL SURFACE ÄUSSERE OBERFLÄCHE SURFACE EXTERIEURE SUPERFICIE ESTERNA
I JED-259
II JED-256
III JED-471-O SILVER
IV PLASTIC/KUNSTSTOFF
V JED-570-322

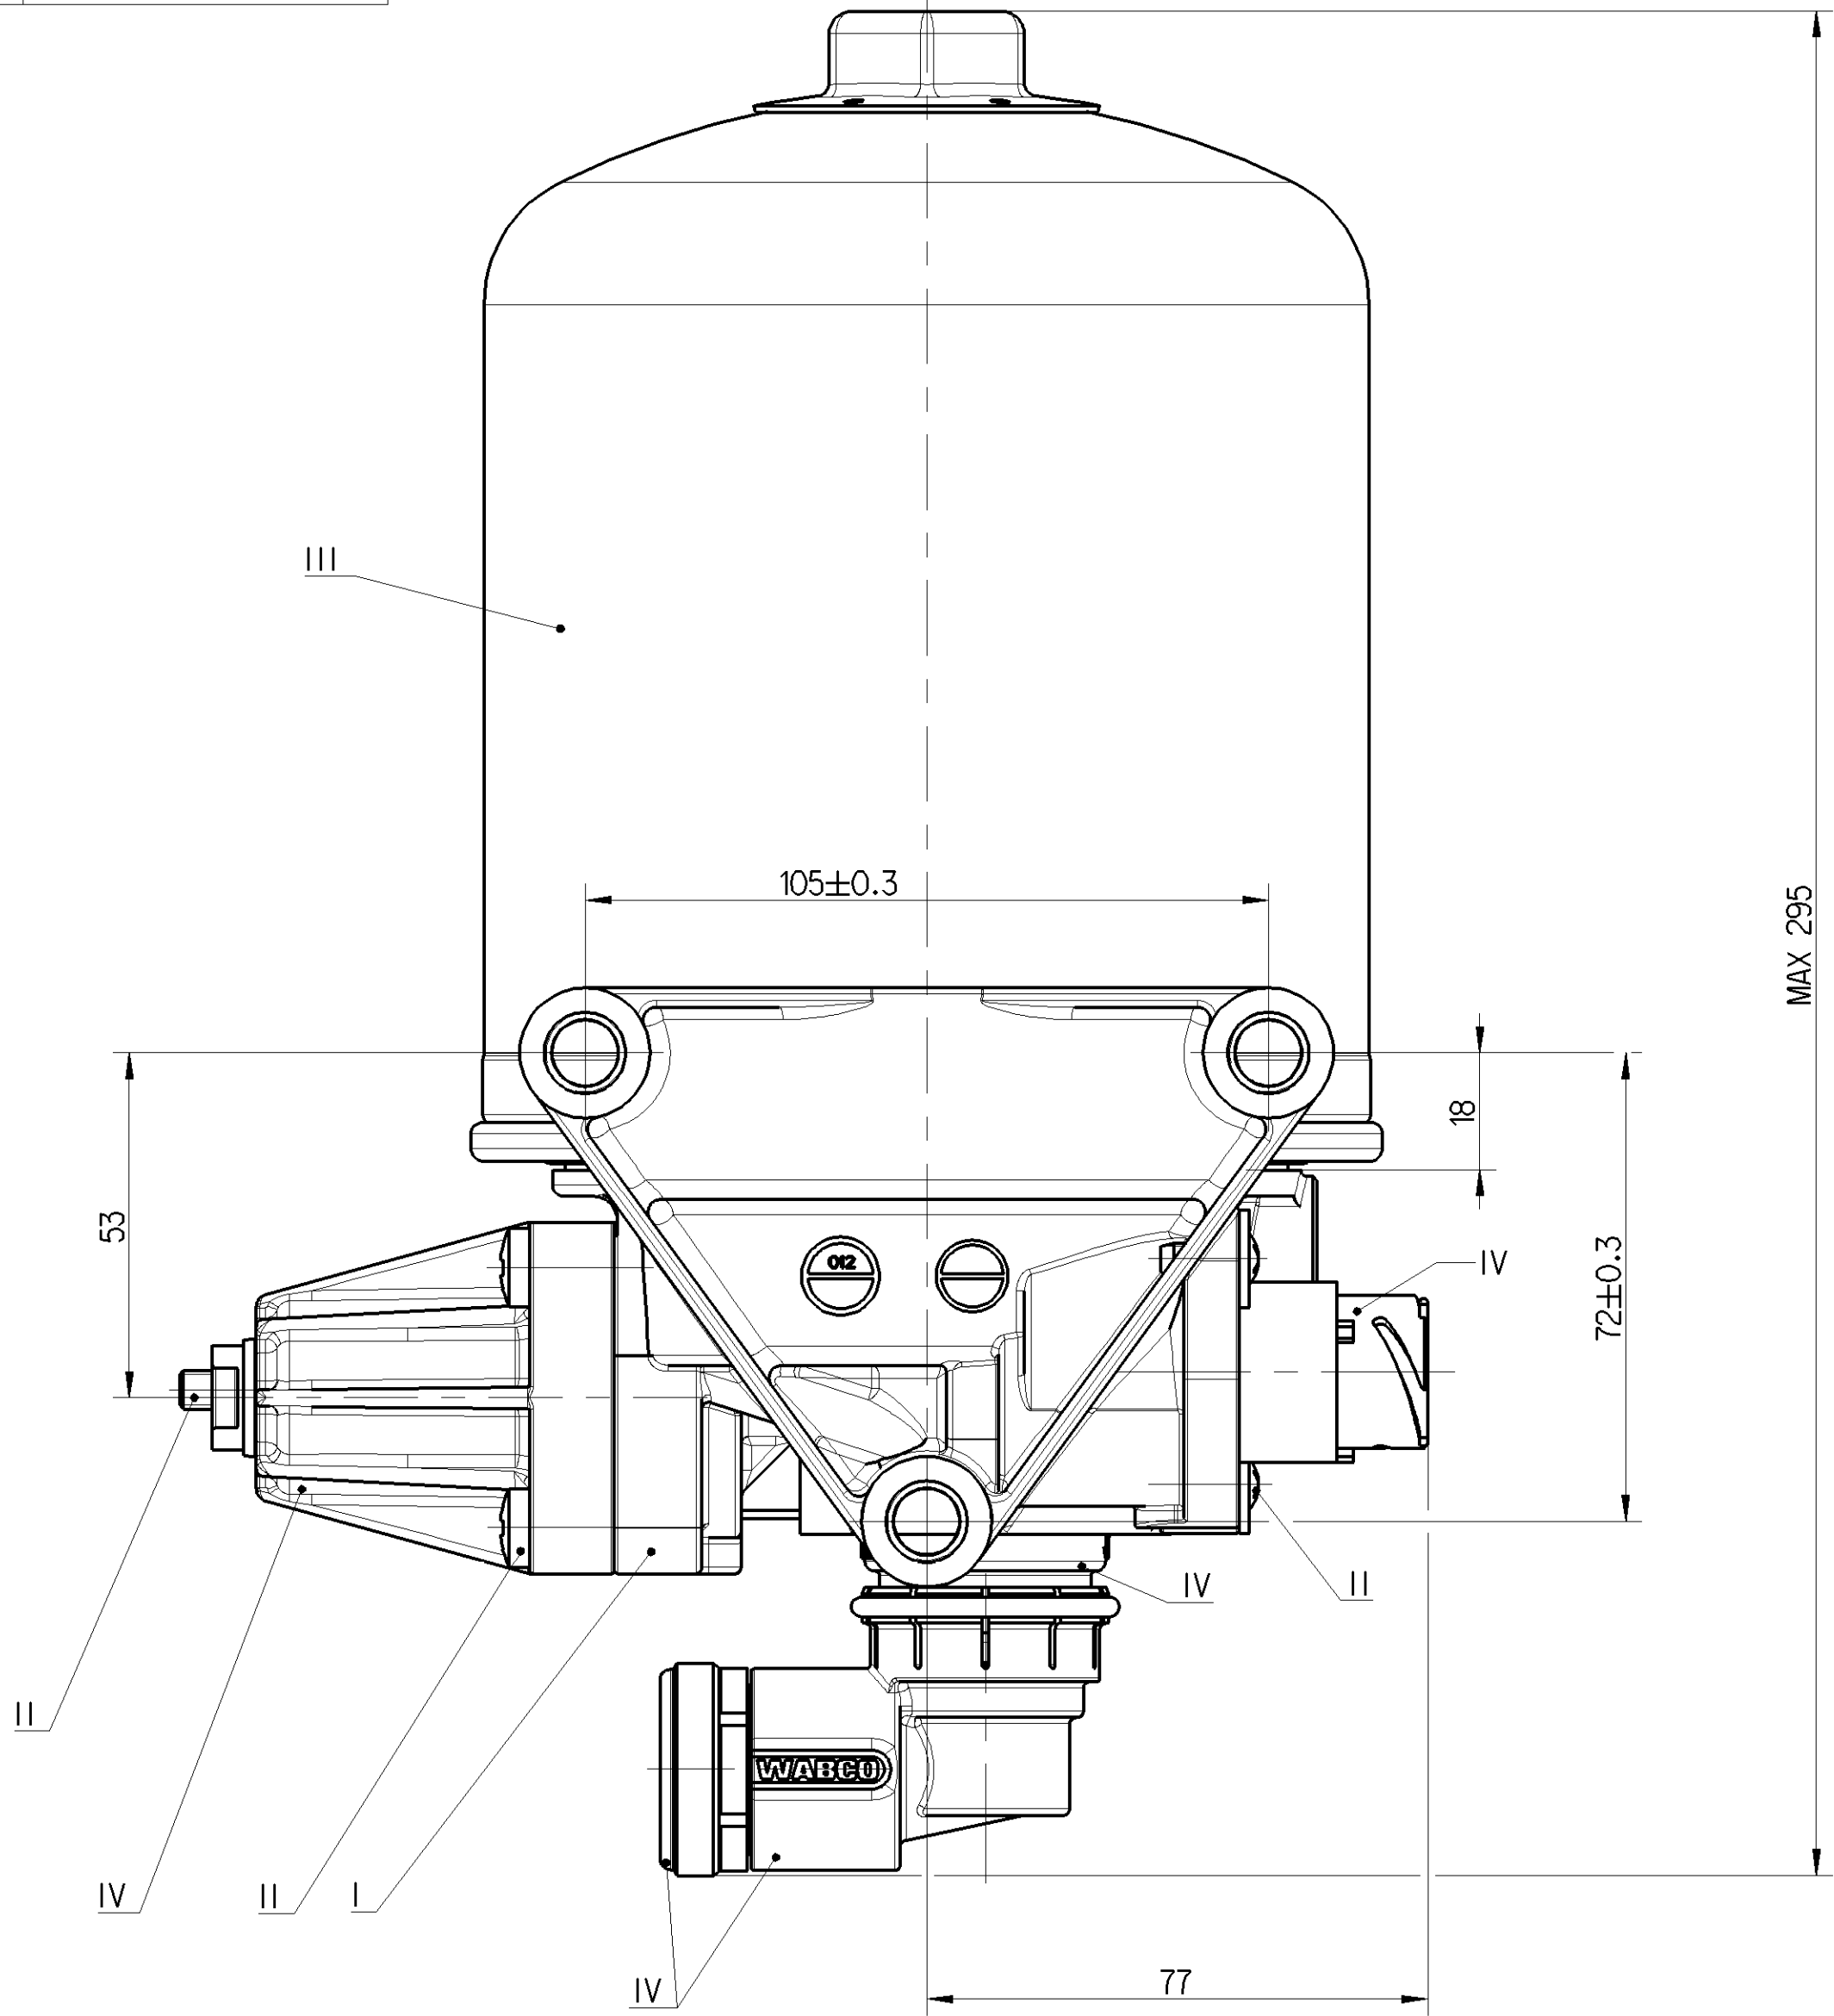

CONNECTION FOR PA-TUBE ØDø=16mm; 360° ROTABLE
ANSCHLUSS FÜR PA-ROHR ØDø=16mm; UM 360° DREHBAR
RECORD POUR TUYAU PA ØDø=16mm; ORIENTABLE 360°
RECCORDO PER TUBO PA ØDø=16mm; GIREVOLE PER 360°

TECHNICAL DATA, TECHNISCHE DATEN, CARACTERISTIQUES TECHNIQUES, CARATTERISTICHE TECNICHE

THERMAL RANGE OF CONTINUOUS APPLICATION:
THERMISCHER DAUERANWENDUNGSBEREICH:
PLAGE DE TEMPERATURE EN UTILISATION CONTINUE:
COMPO DI APPLICAZIONE CONTINUA:

-40°C... +65 °C

RESISTANCE TO HEAT:
WÄRMESTÄNDIGKEIT:
RESISTANCE A LA CHALEUR:
RESISTANZA AL CALORE:

+80°C max

MEDIUM: COMPRESSED AIR
MEDIUM: DRUCKLUFT
FLUIDE: AIR COMPRIE
FLUIDO: ARIA COMPRESSA

WORKING PRESSURE:
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D' ESERCIZIO:

Pe max=13 bar

MAX. PERMISSIBLE FREQUENCY
MAX. ZULÄSSIGE FREQUENZ
MAX. ADMISSIBLE FREQUENCE
MAX. AMMISSIBILE FREQUENZA

50 Hz

MAX. PERMISSIBLE ACCELERATION
MAX. ZULÄSSIGE BESCHLÜNNIGUNG
ACCELERATION MAX. ADMISSIBLE
ACCELERAZIONE MAX. AMMESSA

±10 x g


DYNAMIC PRESSURE OF SAFETY VALVE:
STAHDROCK DES SICHERHEITSVENTILES:
PRESSION DYNAMIQUE DU SOUPAPE DE SECURITE:
PRESSIONE DINAMICA DELLA VALVOLA DI SICUREZZA:

12⁺⁴₀ bar (BY V_n=100 dm³/min)

TORQUES FOR CONNECTIONS:
ANZUNGSOMENT FÜR EINSCHRAUBSTUTZEN:
COUPLE DE SERRAGE DES RACCORDS
COPPIA DI SERRAGGIO DEI RACCORDI:

M22x1,5; Mmax=53 Nm
PT 1/4; Mmax ≤ 21 Nm (I)
PT 3/8; Mmax ≤ 34 Nm (I)

INSTALLATION POSITION
EINBAULAGE
POSITION D' INSTALLATION
POSIZIONE DI MONTAGGIO

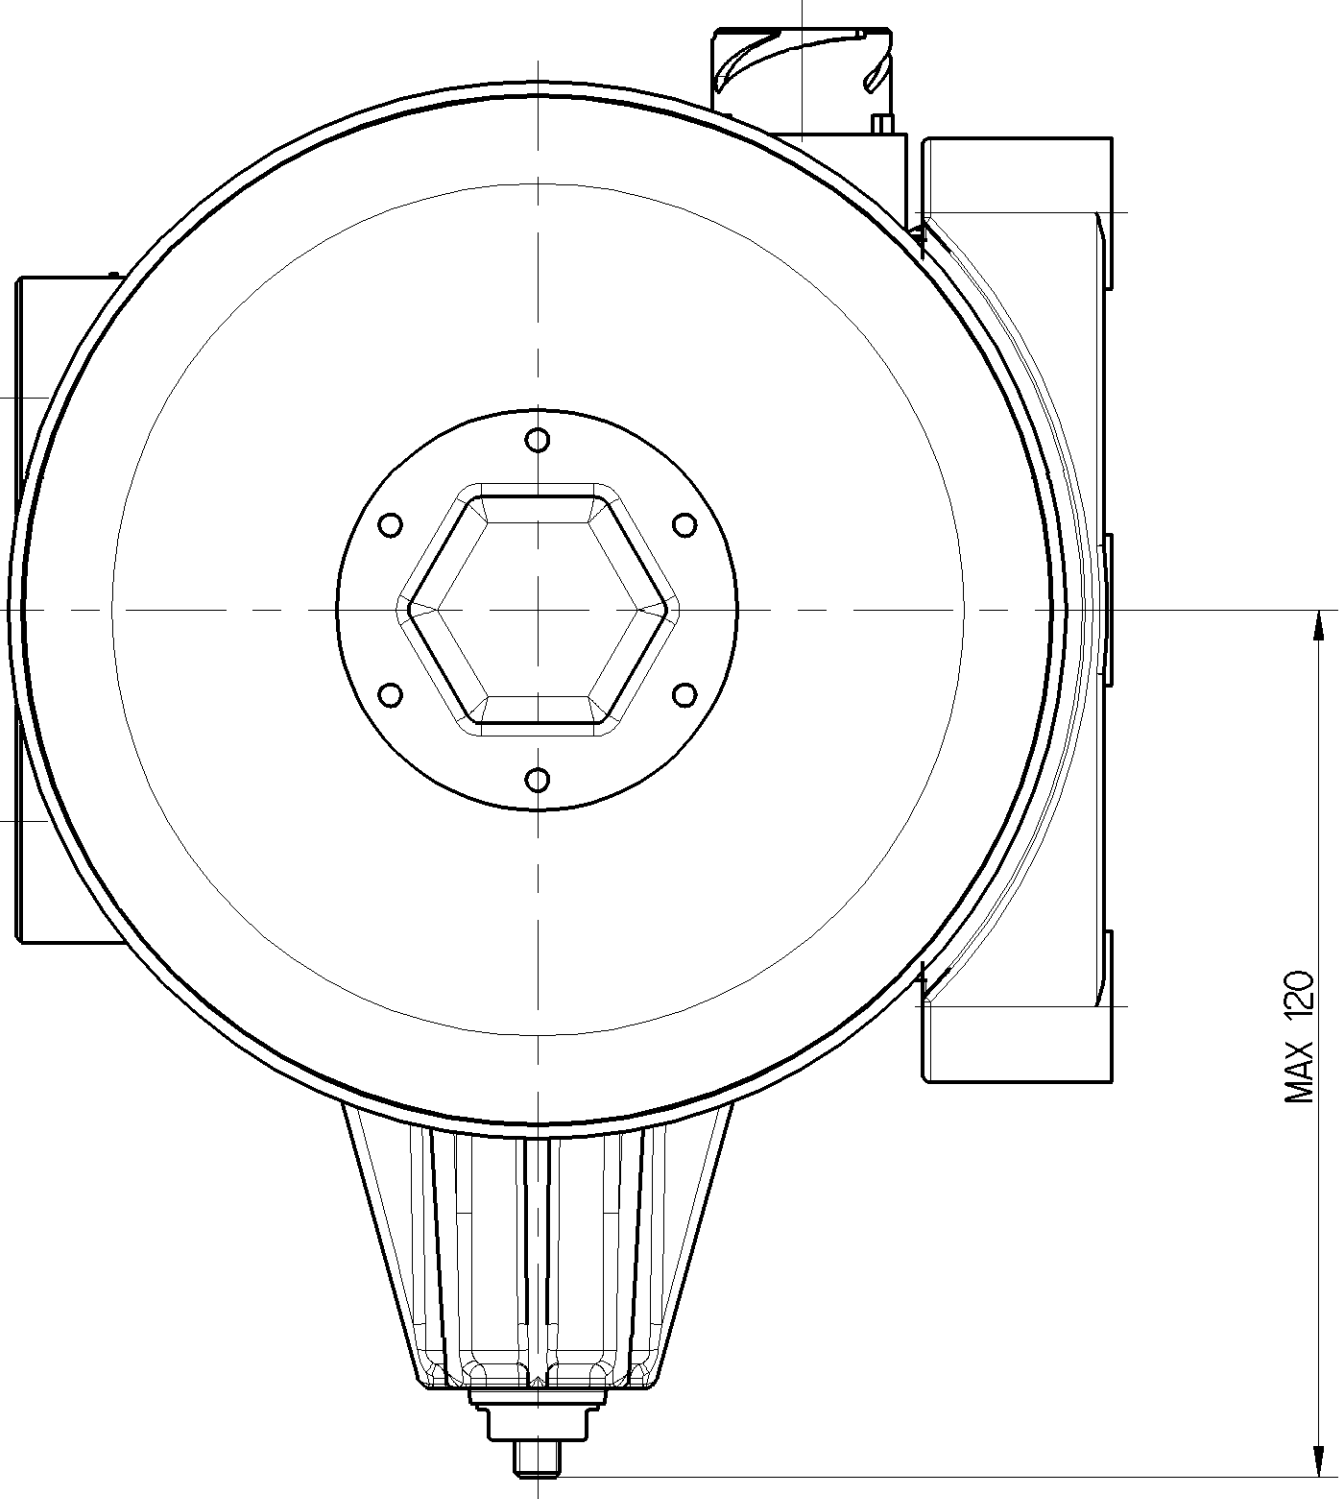

HEATING:
HEIZUNG:
CHAUFFAGE:
RISCALDAMENTO:

POWER : 100 W
LEISTUNG :
PUISSANCE :
POTENZA :


VOLTAGE : 24.0 +4.8 V DC
SPANNUNG :
VOLTAGE :
VOLTAGGIO :

CUT OUT TEMPERATURE
EINSCHALT - TEMPERATUR
TEMPERATURE DE FERMETURE
TEMPERATURA DI CHIUSURA

7 ±6 °C

CUT OUT TEMPERATURE
AUSSCHALT-TEMPERATUR
TEMPERATURE DE MISE
TEMPERATURA DI APERTURA

29.5 ±3.0 °C

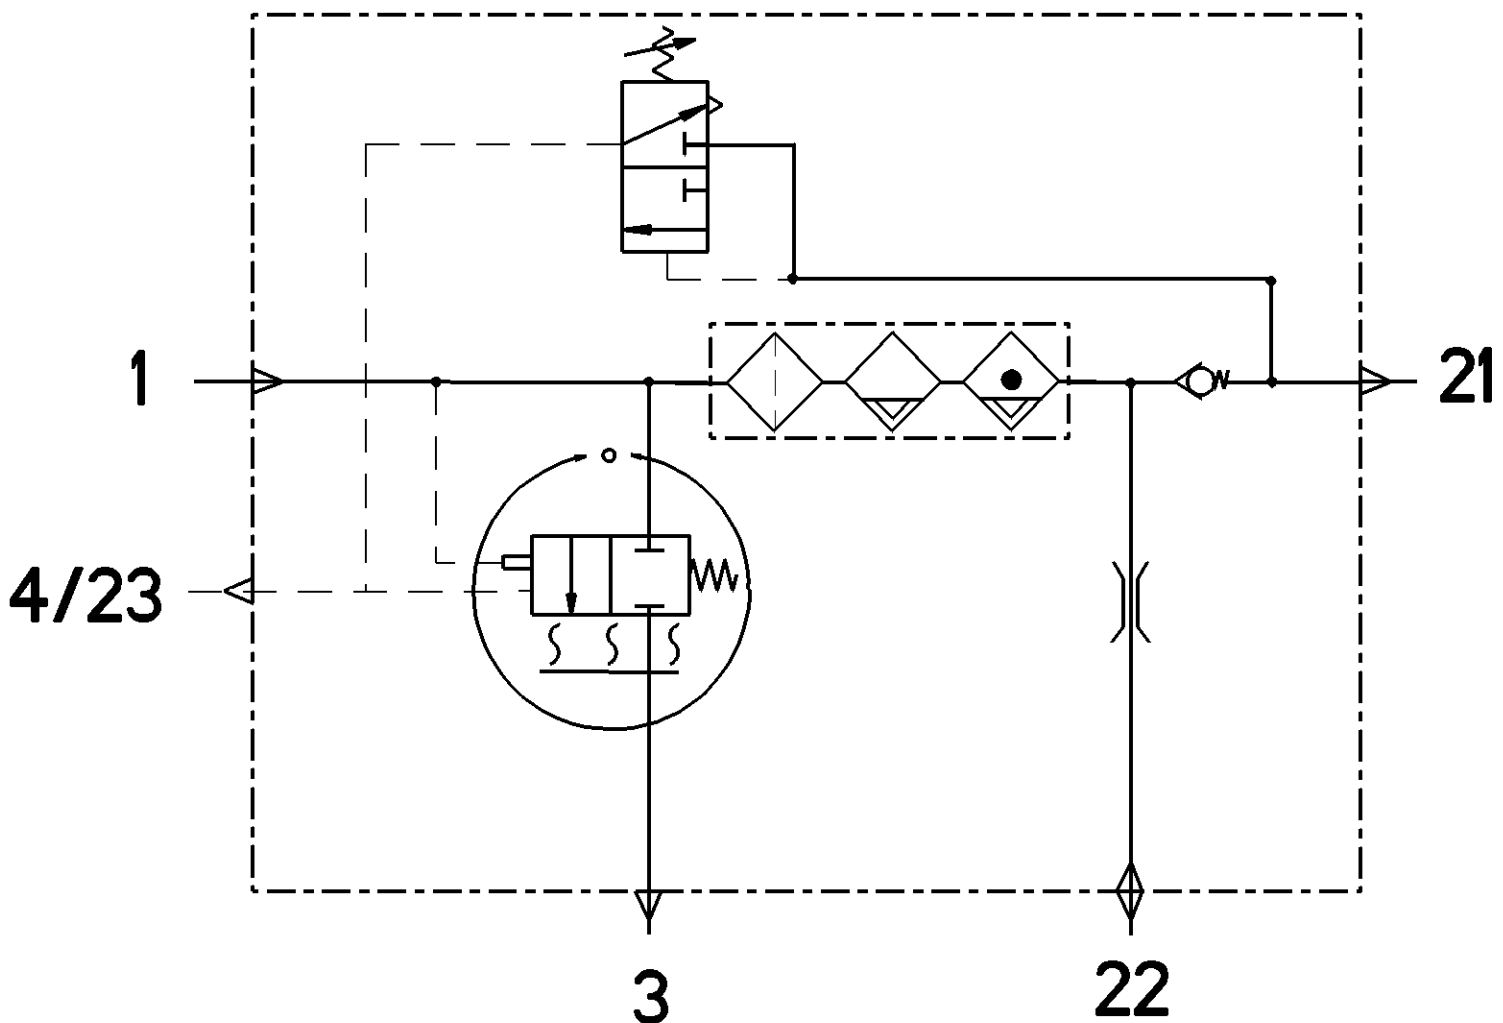

PORT ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNKTION FONCTION	THREAD GEWINDE FILETTATURA
1	FROM THE COMPRESSOR VOM KOMPRESSOR PROVENANT DU COMPRESSEUR PROVENIENTE DEL COMPRESSORE	M22x1,5 JED-388
21	TO THE RESERVOIRS ZU DEN LUTBEHAELTERN AUX RESERVOIR AL SERBATOII PER	M22x1,5 JED-388-4
22	TO RESERVOIR FOR REGENERATION AIR ZUM REGENERATIONS-LUTBEHAELTER AU RESERVOIR D'AIR DE REGENERATION AL SERBATOII PER L'ARIA RIGENERATA	PT 3/8
3	EXHAUST FOR COMPRESSED AIR ENTLUEFTUNG FÜR DRUCKLUFT ECHAPPEMENT POUR AIR COMPRIE SCARIO PER ARIA COMPRESSA	ØDø=16 PA-TUBE CONNECTOR
4/23	TO THE COMPRESSOR ZUM KOMPRESSOR AU COMPRESSEUR AL COMPRESSORE	PT 1/4
6	HEATING HEIZUNG CHAUFFAGE RISCALDAMENTO	-

General Specifications: JED-554-1, Size ISO 14400 LP		Copyright WABCO®		WABCO	
Further Technical Data: Product Specification		Date: 2016-10-04		Signature: Kurzynski	
Doc. Code: 030		Sheet: 1		To: 4	
General Tolerances: JED-261		2016-10-07		Checked: Kurzynski	
Range of Nominal Dimensions (± mm)		Exp.: Kurzynski		Lit.: Kurzynski	
Class	1	± 50	± 180	± 400	± 400
Fine	0.5	1.0	1.5	2.0	±3°
Medium	1.0	2.0	3.0	4.0	±3°
Coarse	2.0	3.5	5.0	6.5	±3°
Tapped holes acc. JED-388		Metric No.		Date of first issue: 2016-10-04	
Tolerance Class: Applied: Uncontrolled		432 410 279 0		Doc. Code: Language: Sheet	
A 0		CREO		1:1	
172017		2 x D		5050	