

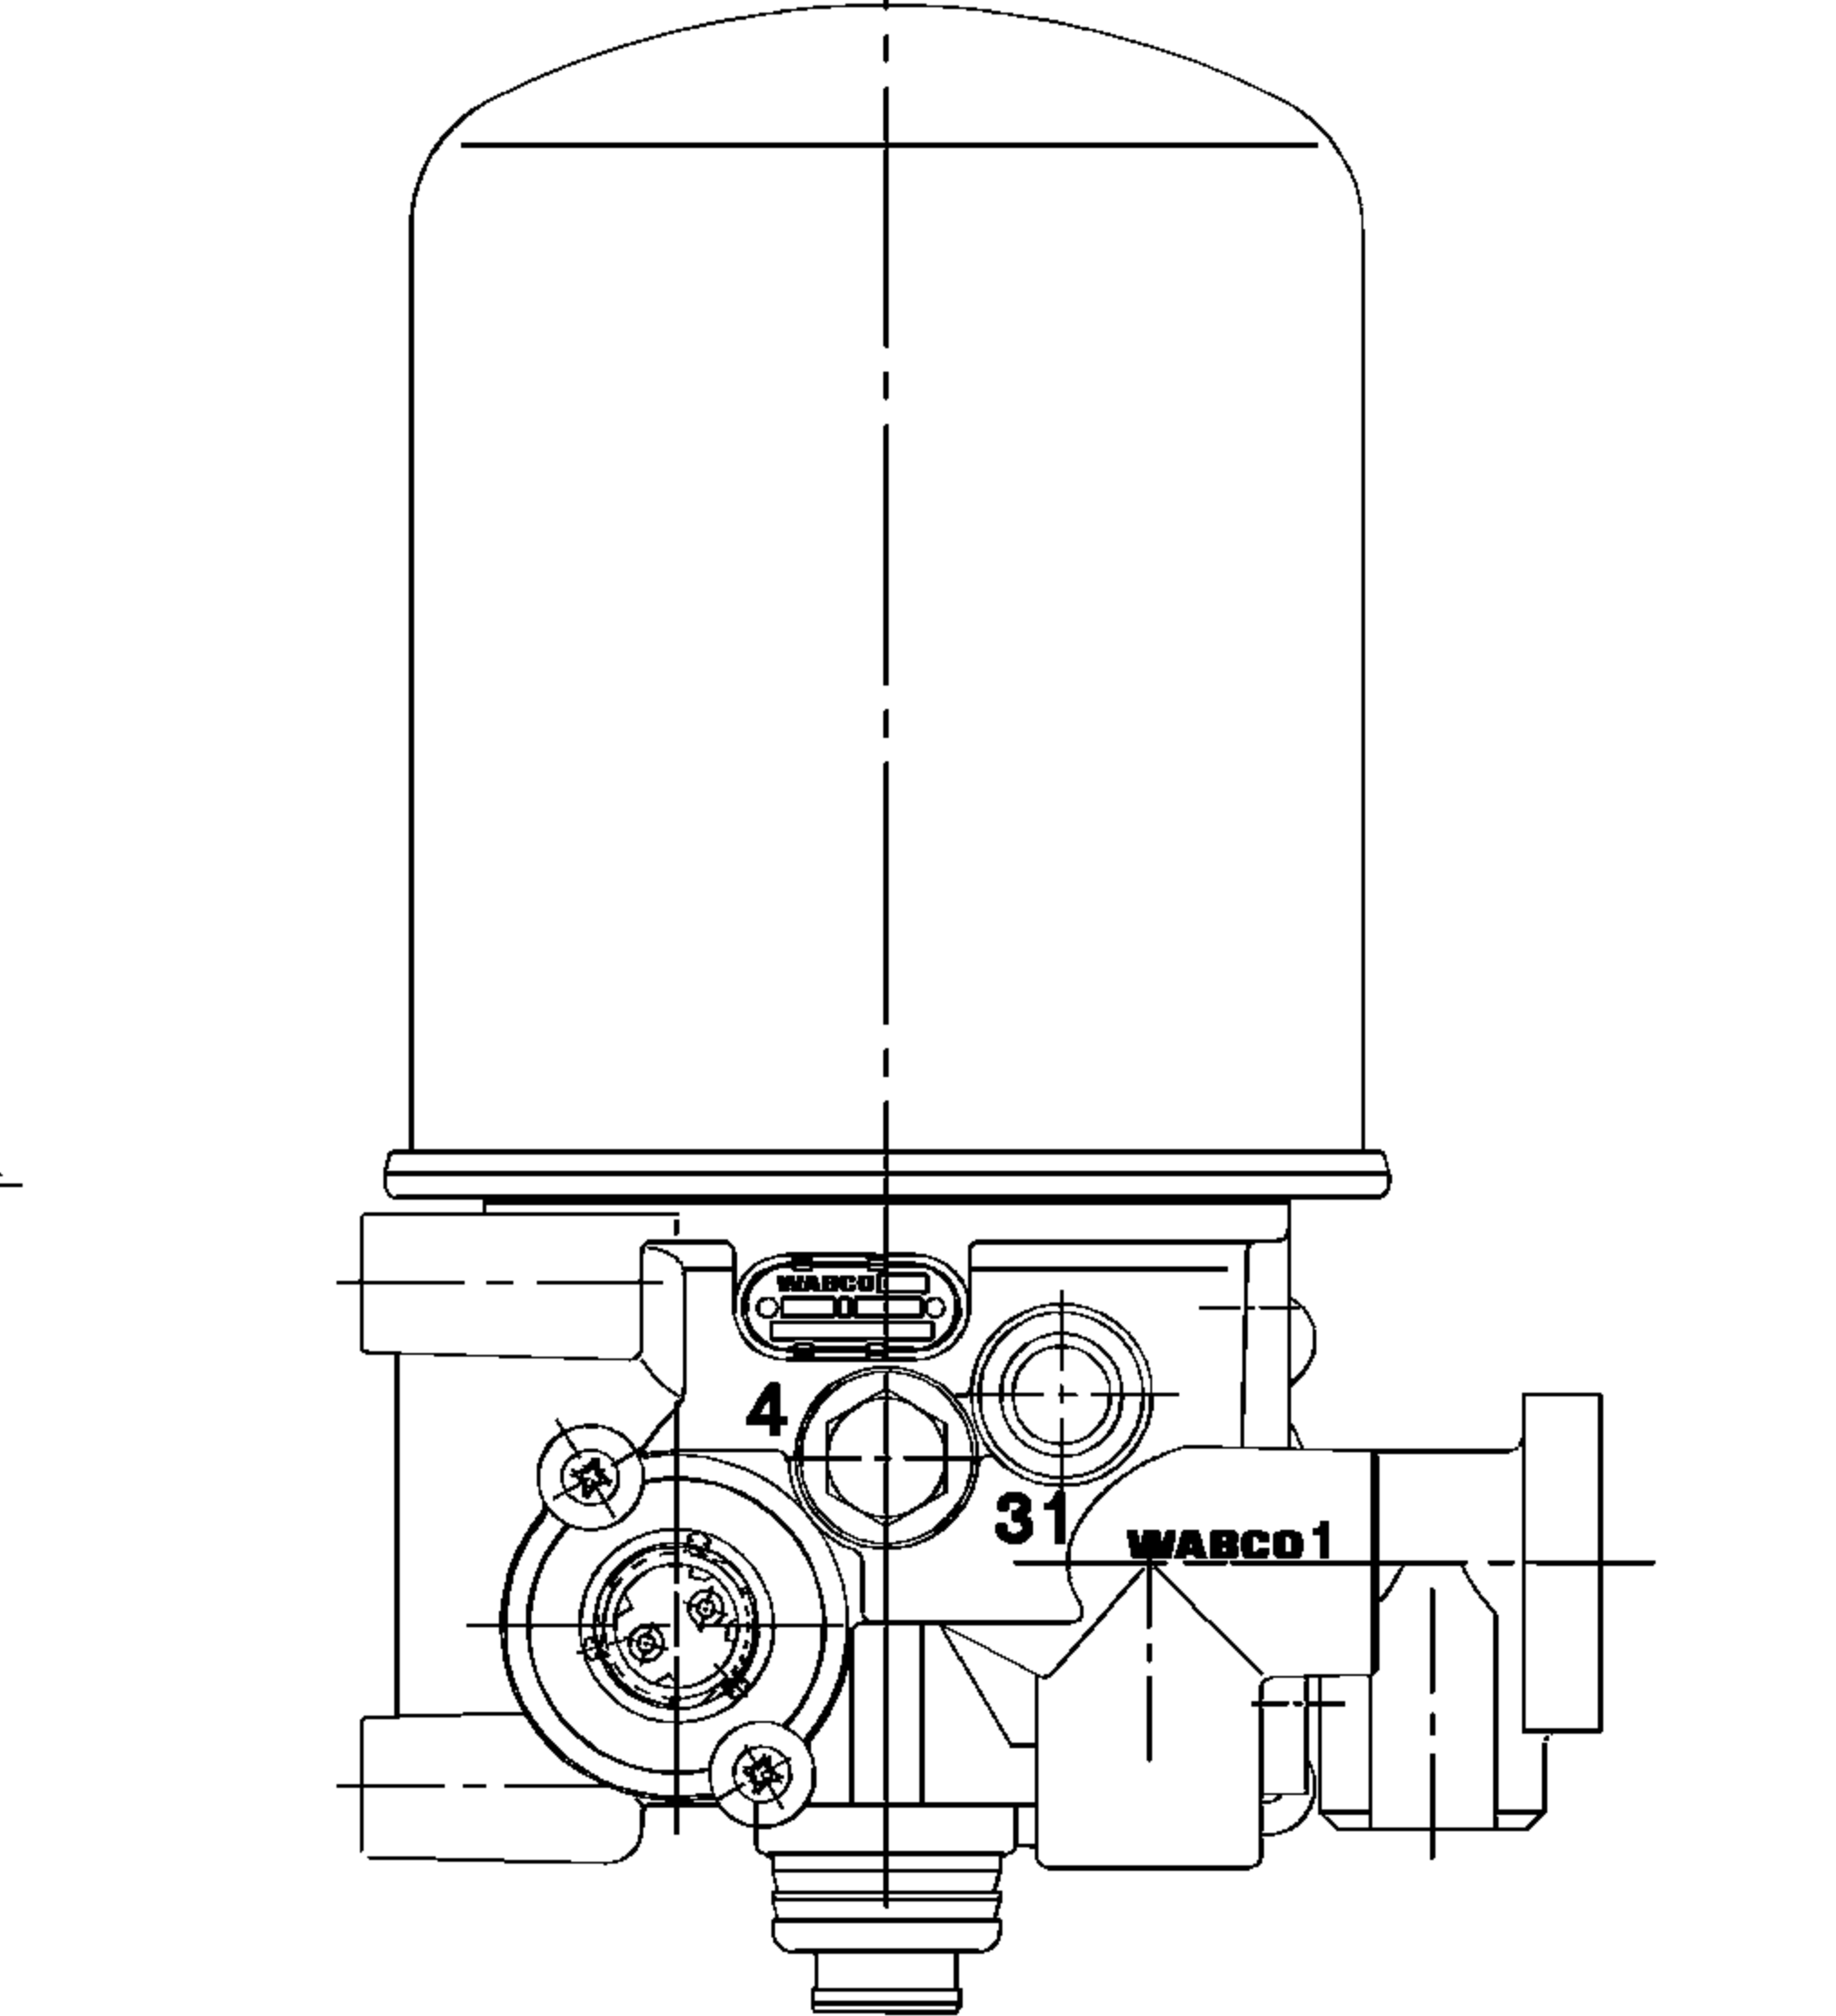
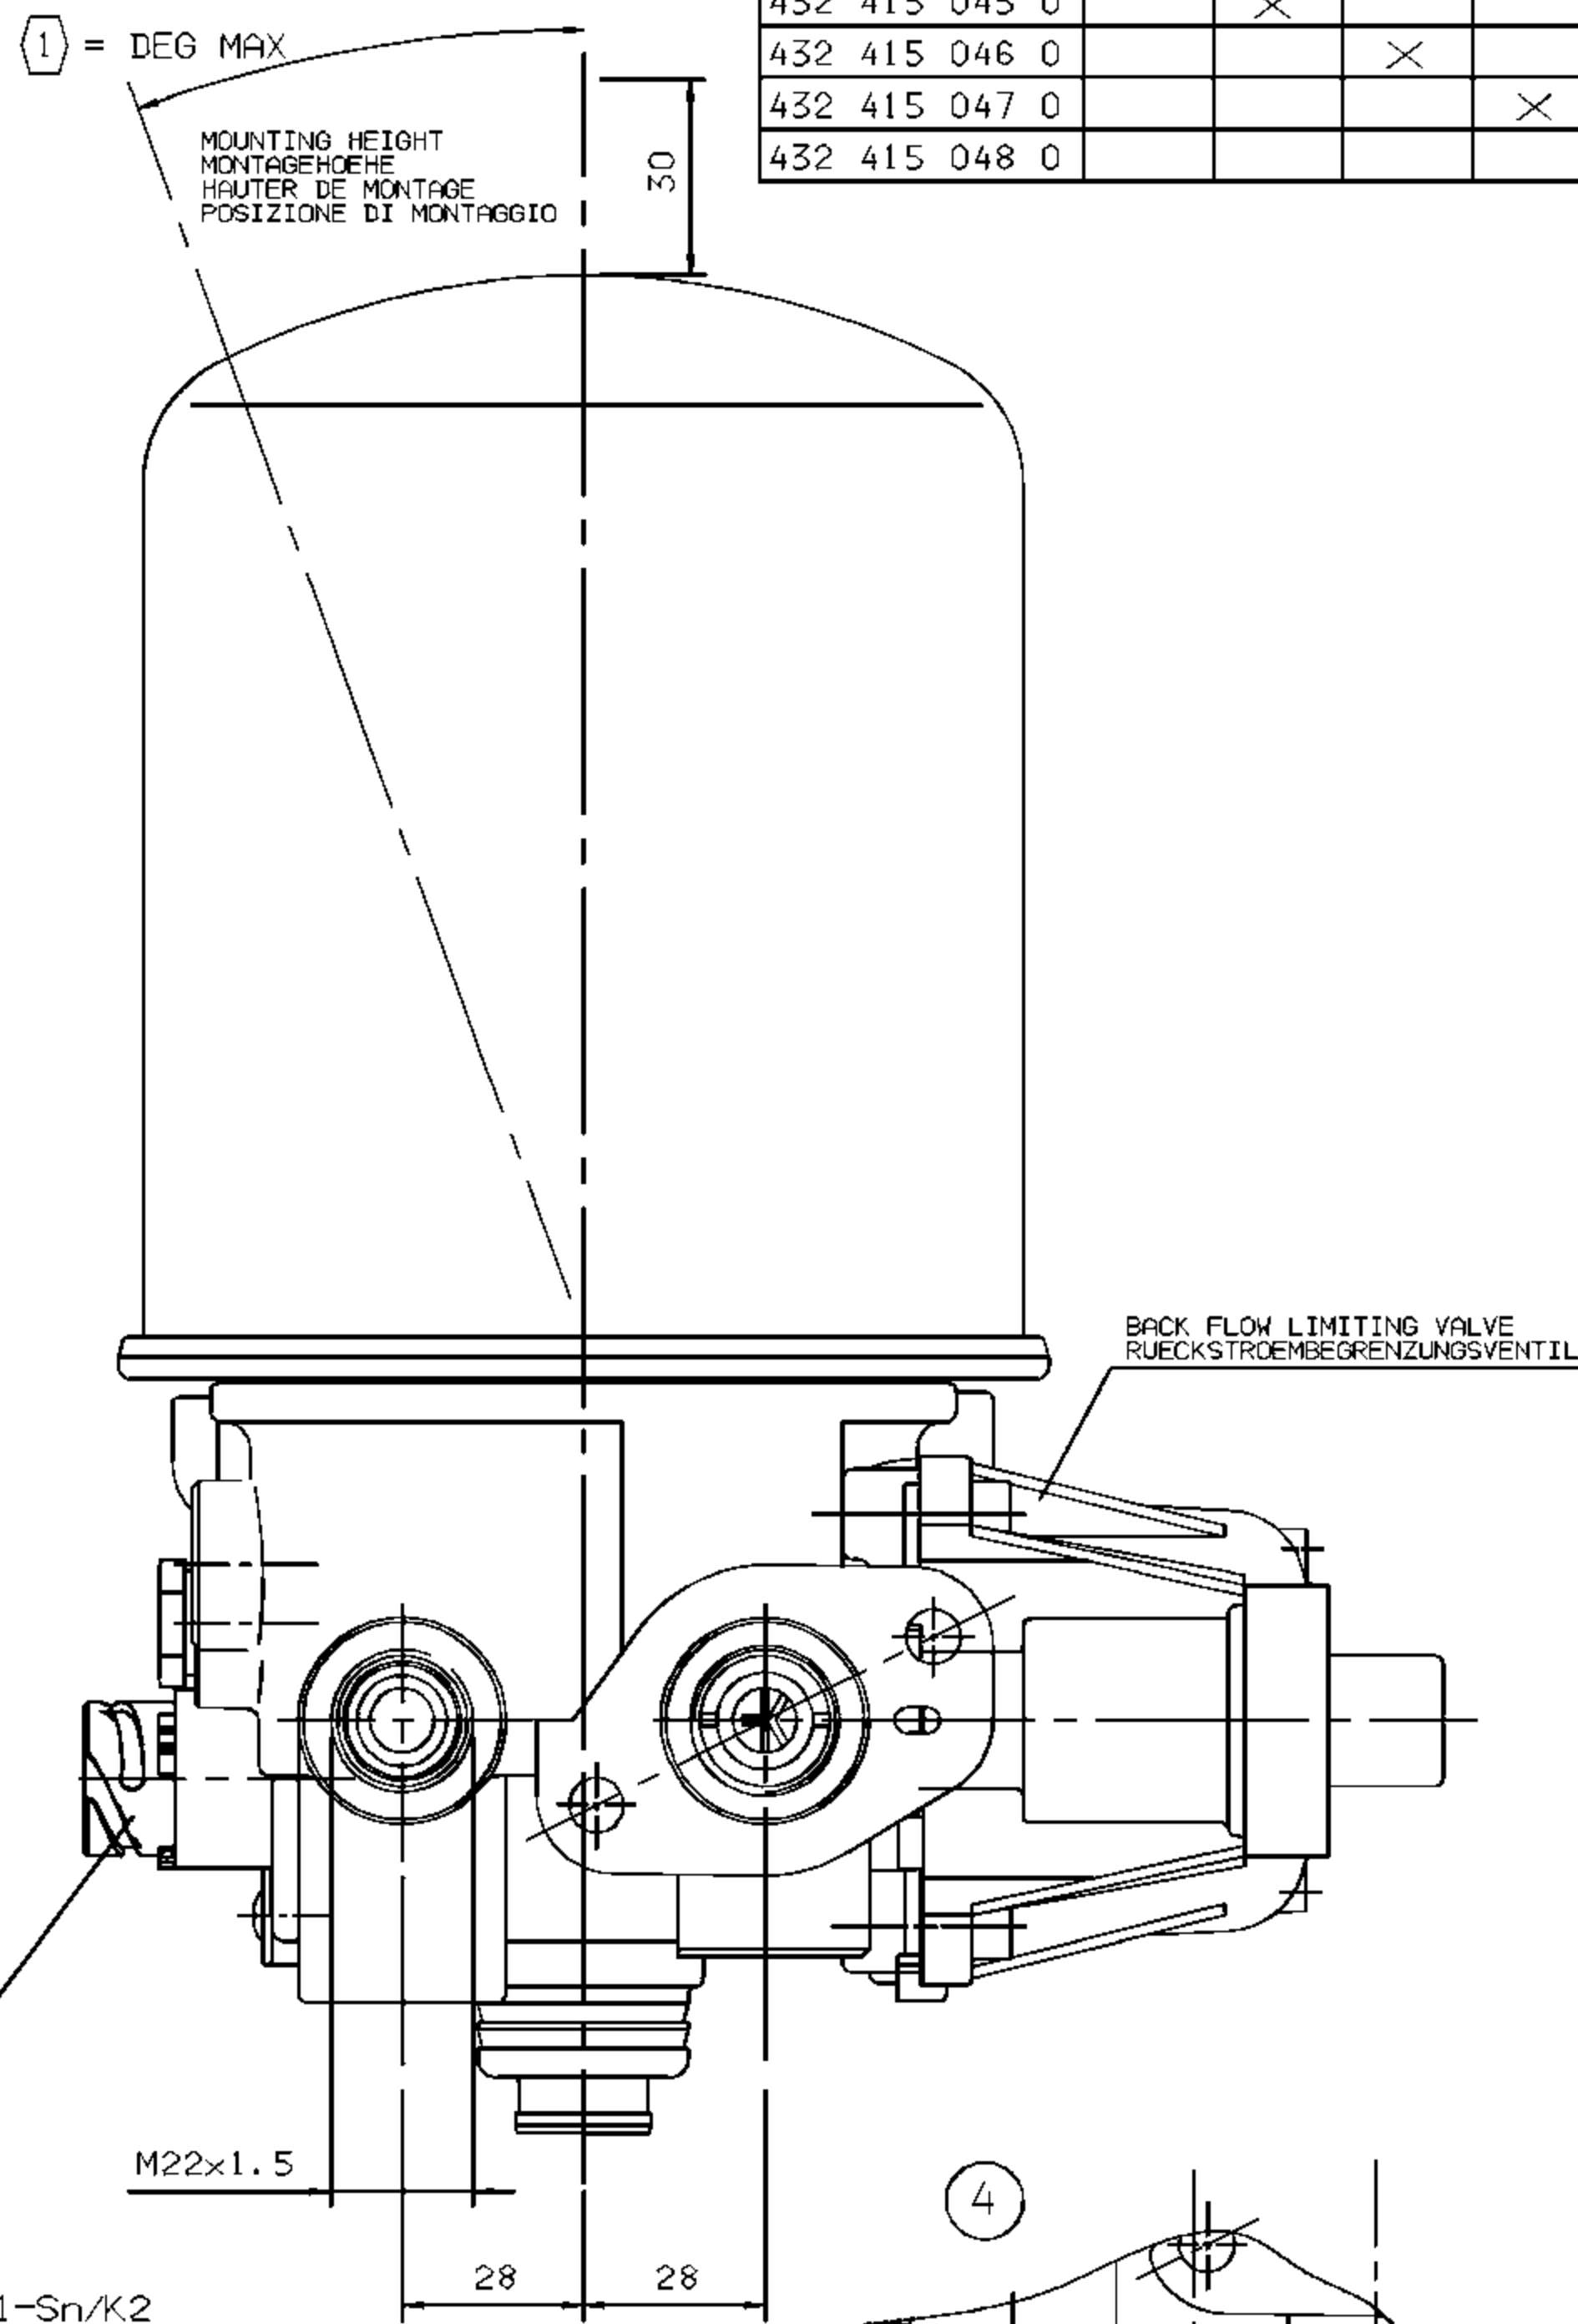
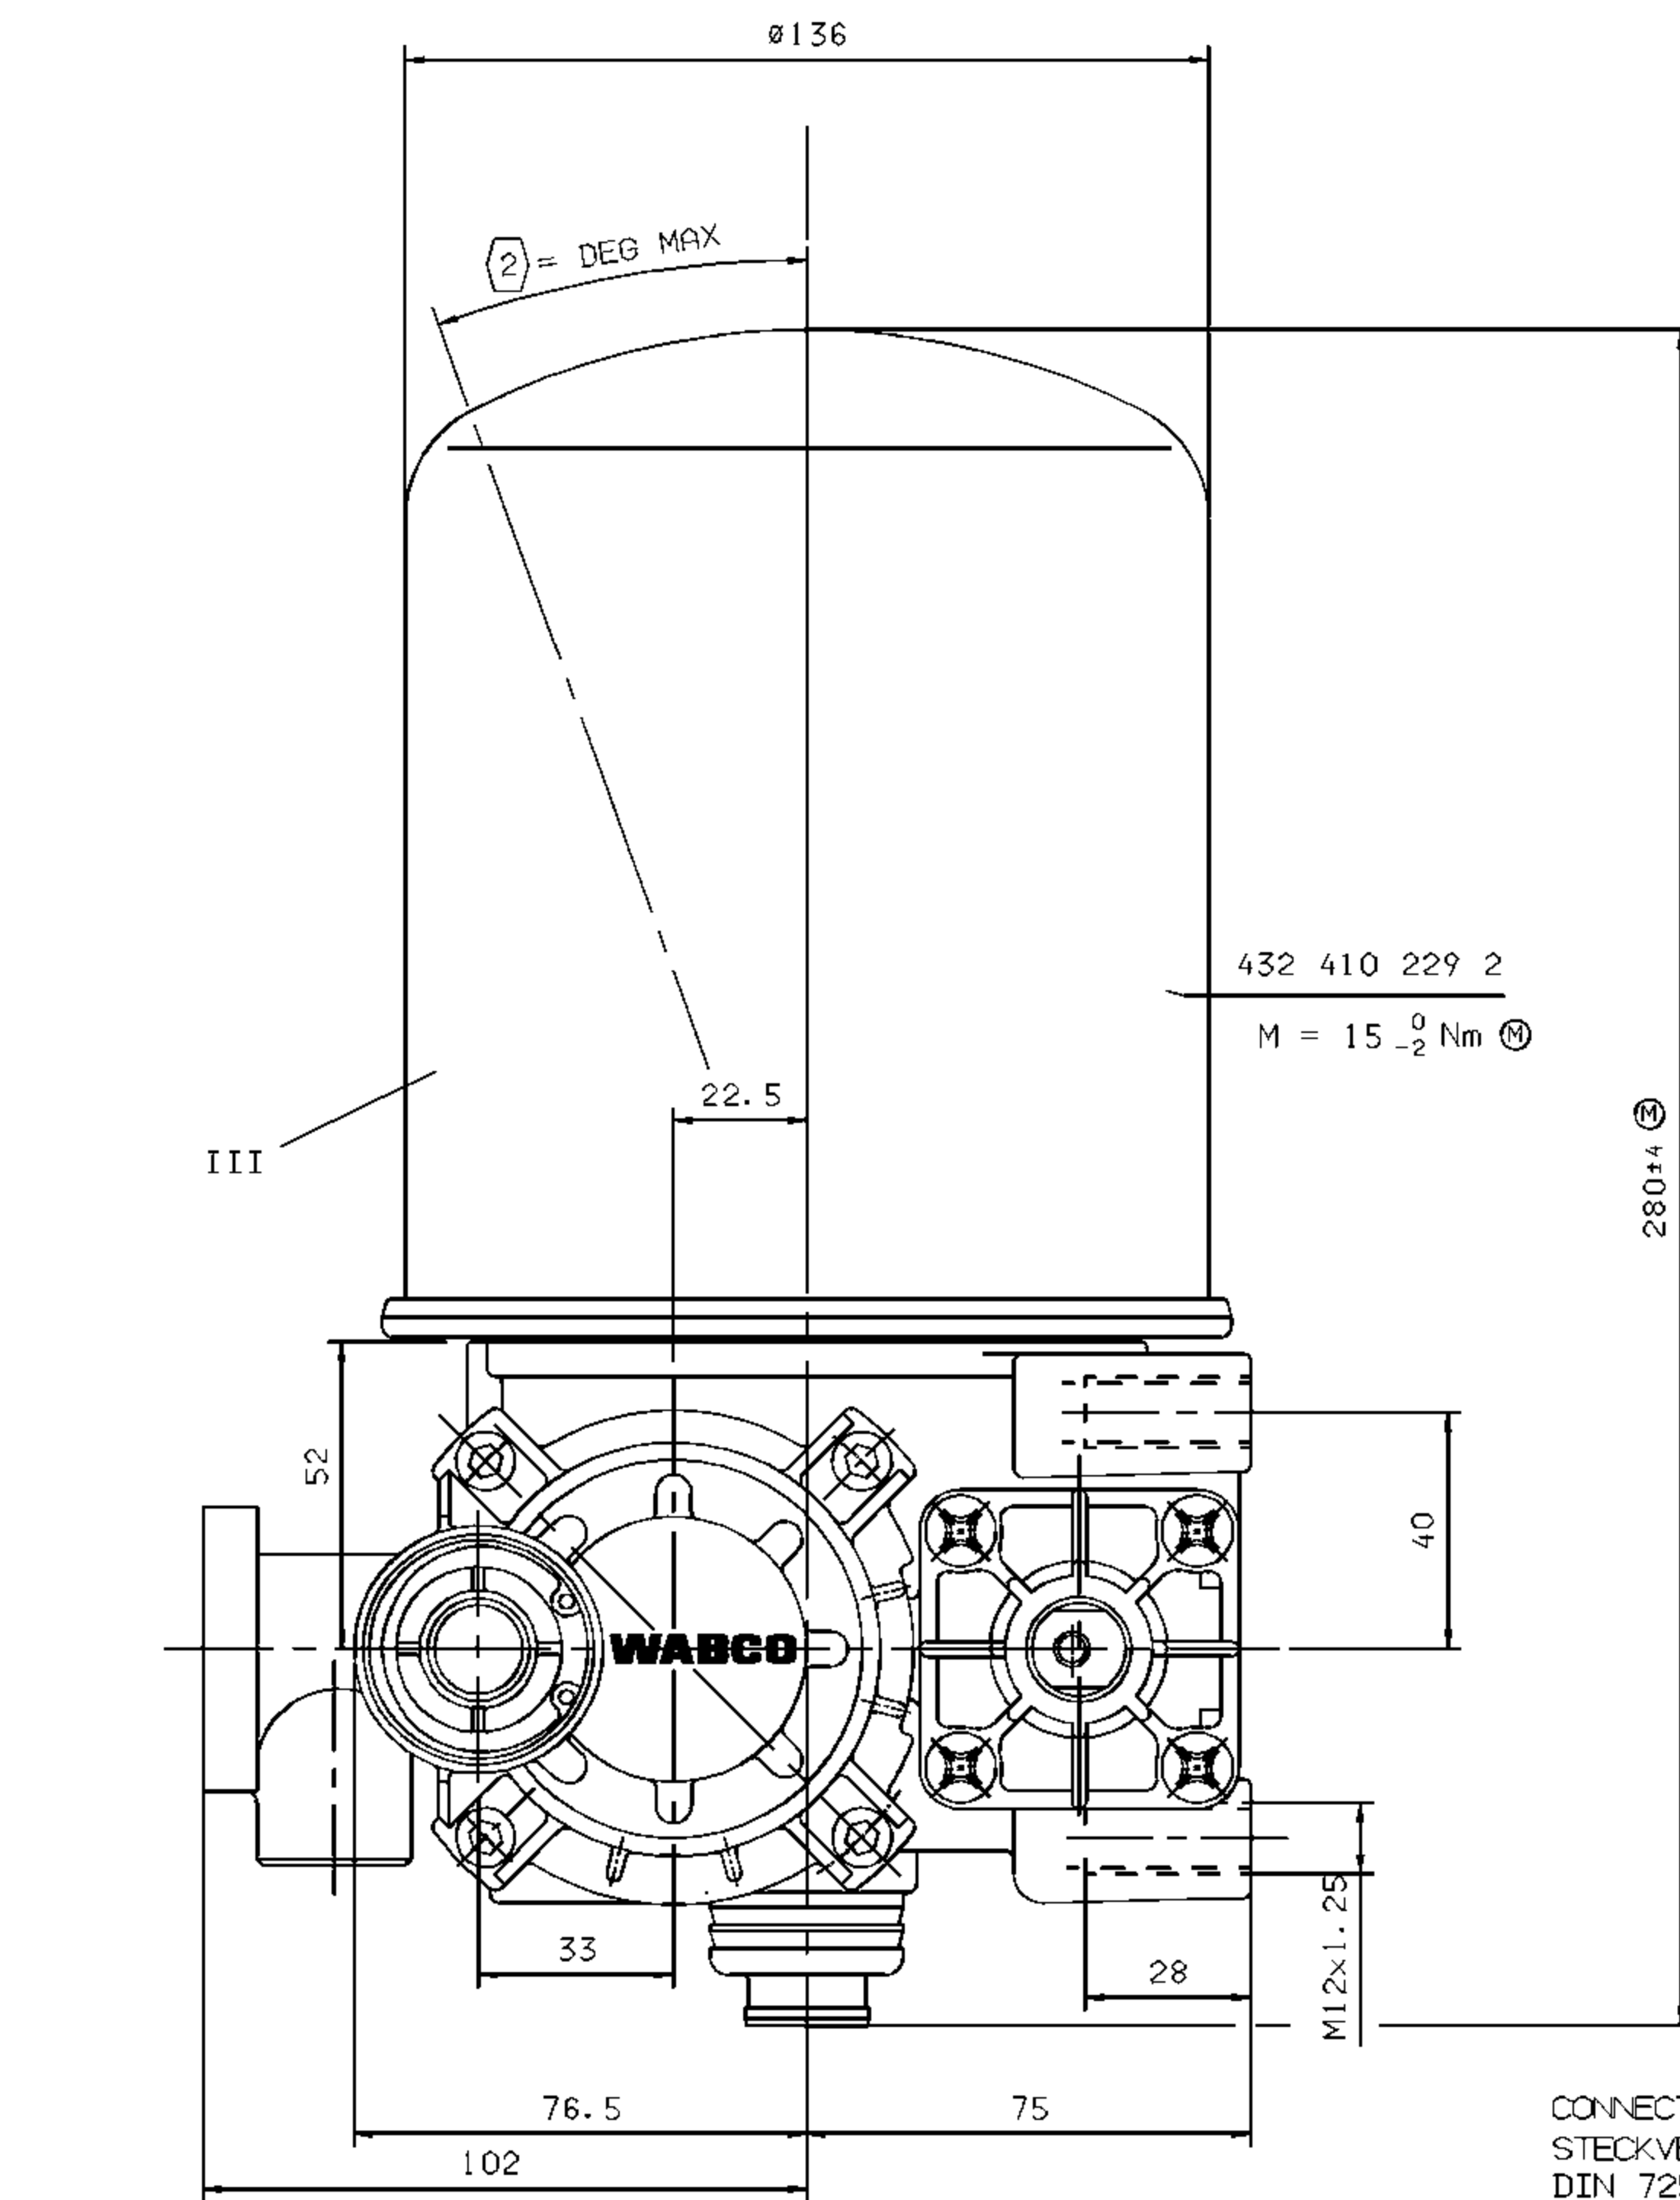


1	2
20°	20°
60°	0°

I	JED-259
II	JED-256-1
III	JED-471 SCHWARZ/BLACK
IV	KUNSTSTOFF/PLASTIC
VI	JED-260

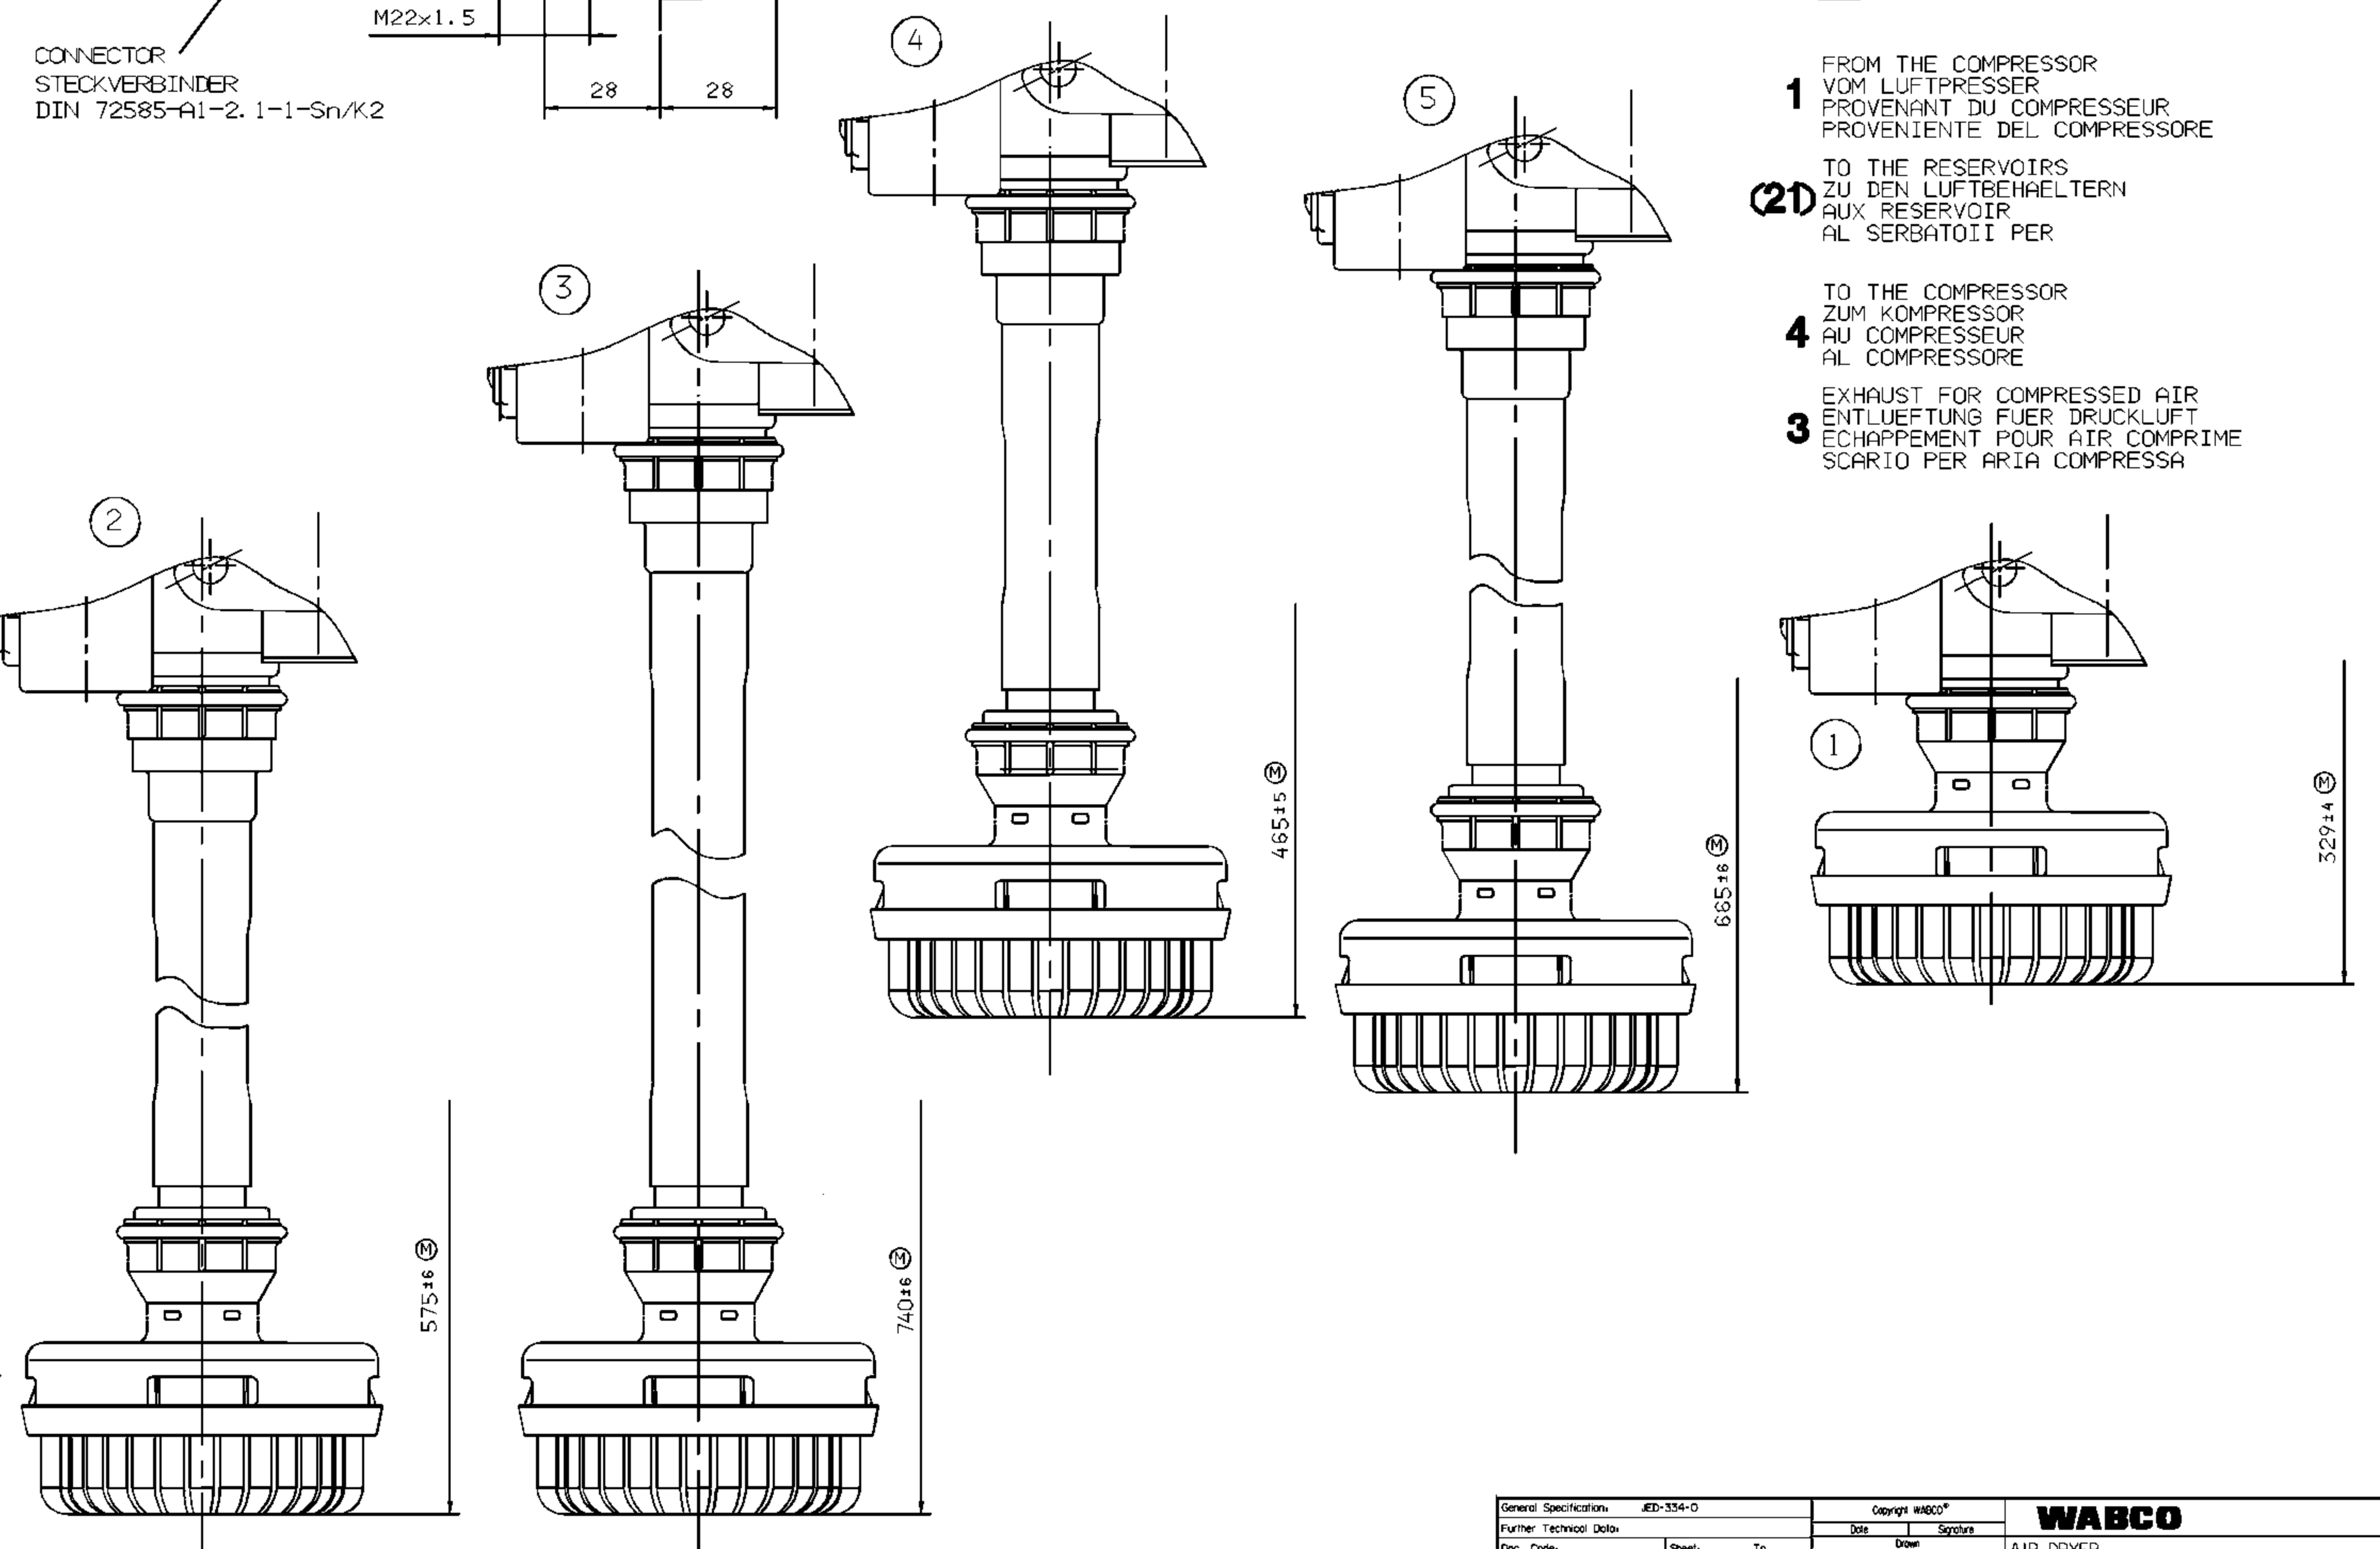

POWER:	WITHOUT CURRENT	WITH	APPLIED ACROSS THE HEATER CONTACTS
LEISTUNG:	STROMLOS	BEI	DIREKT AN DEN HEIZUNGSKONTAKTEN
POISSANCE:	100 W	24 V DC	APPLIQUEE SUR LES CONTACTS DE CHAUFFAGE
POTENZA:	SANS COURANT	CON	APPLICATA SULLE CONTATTI DI RISCALDAMENTO
	SENZA CORRENTE		

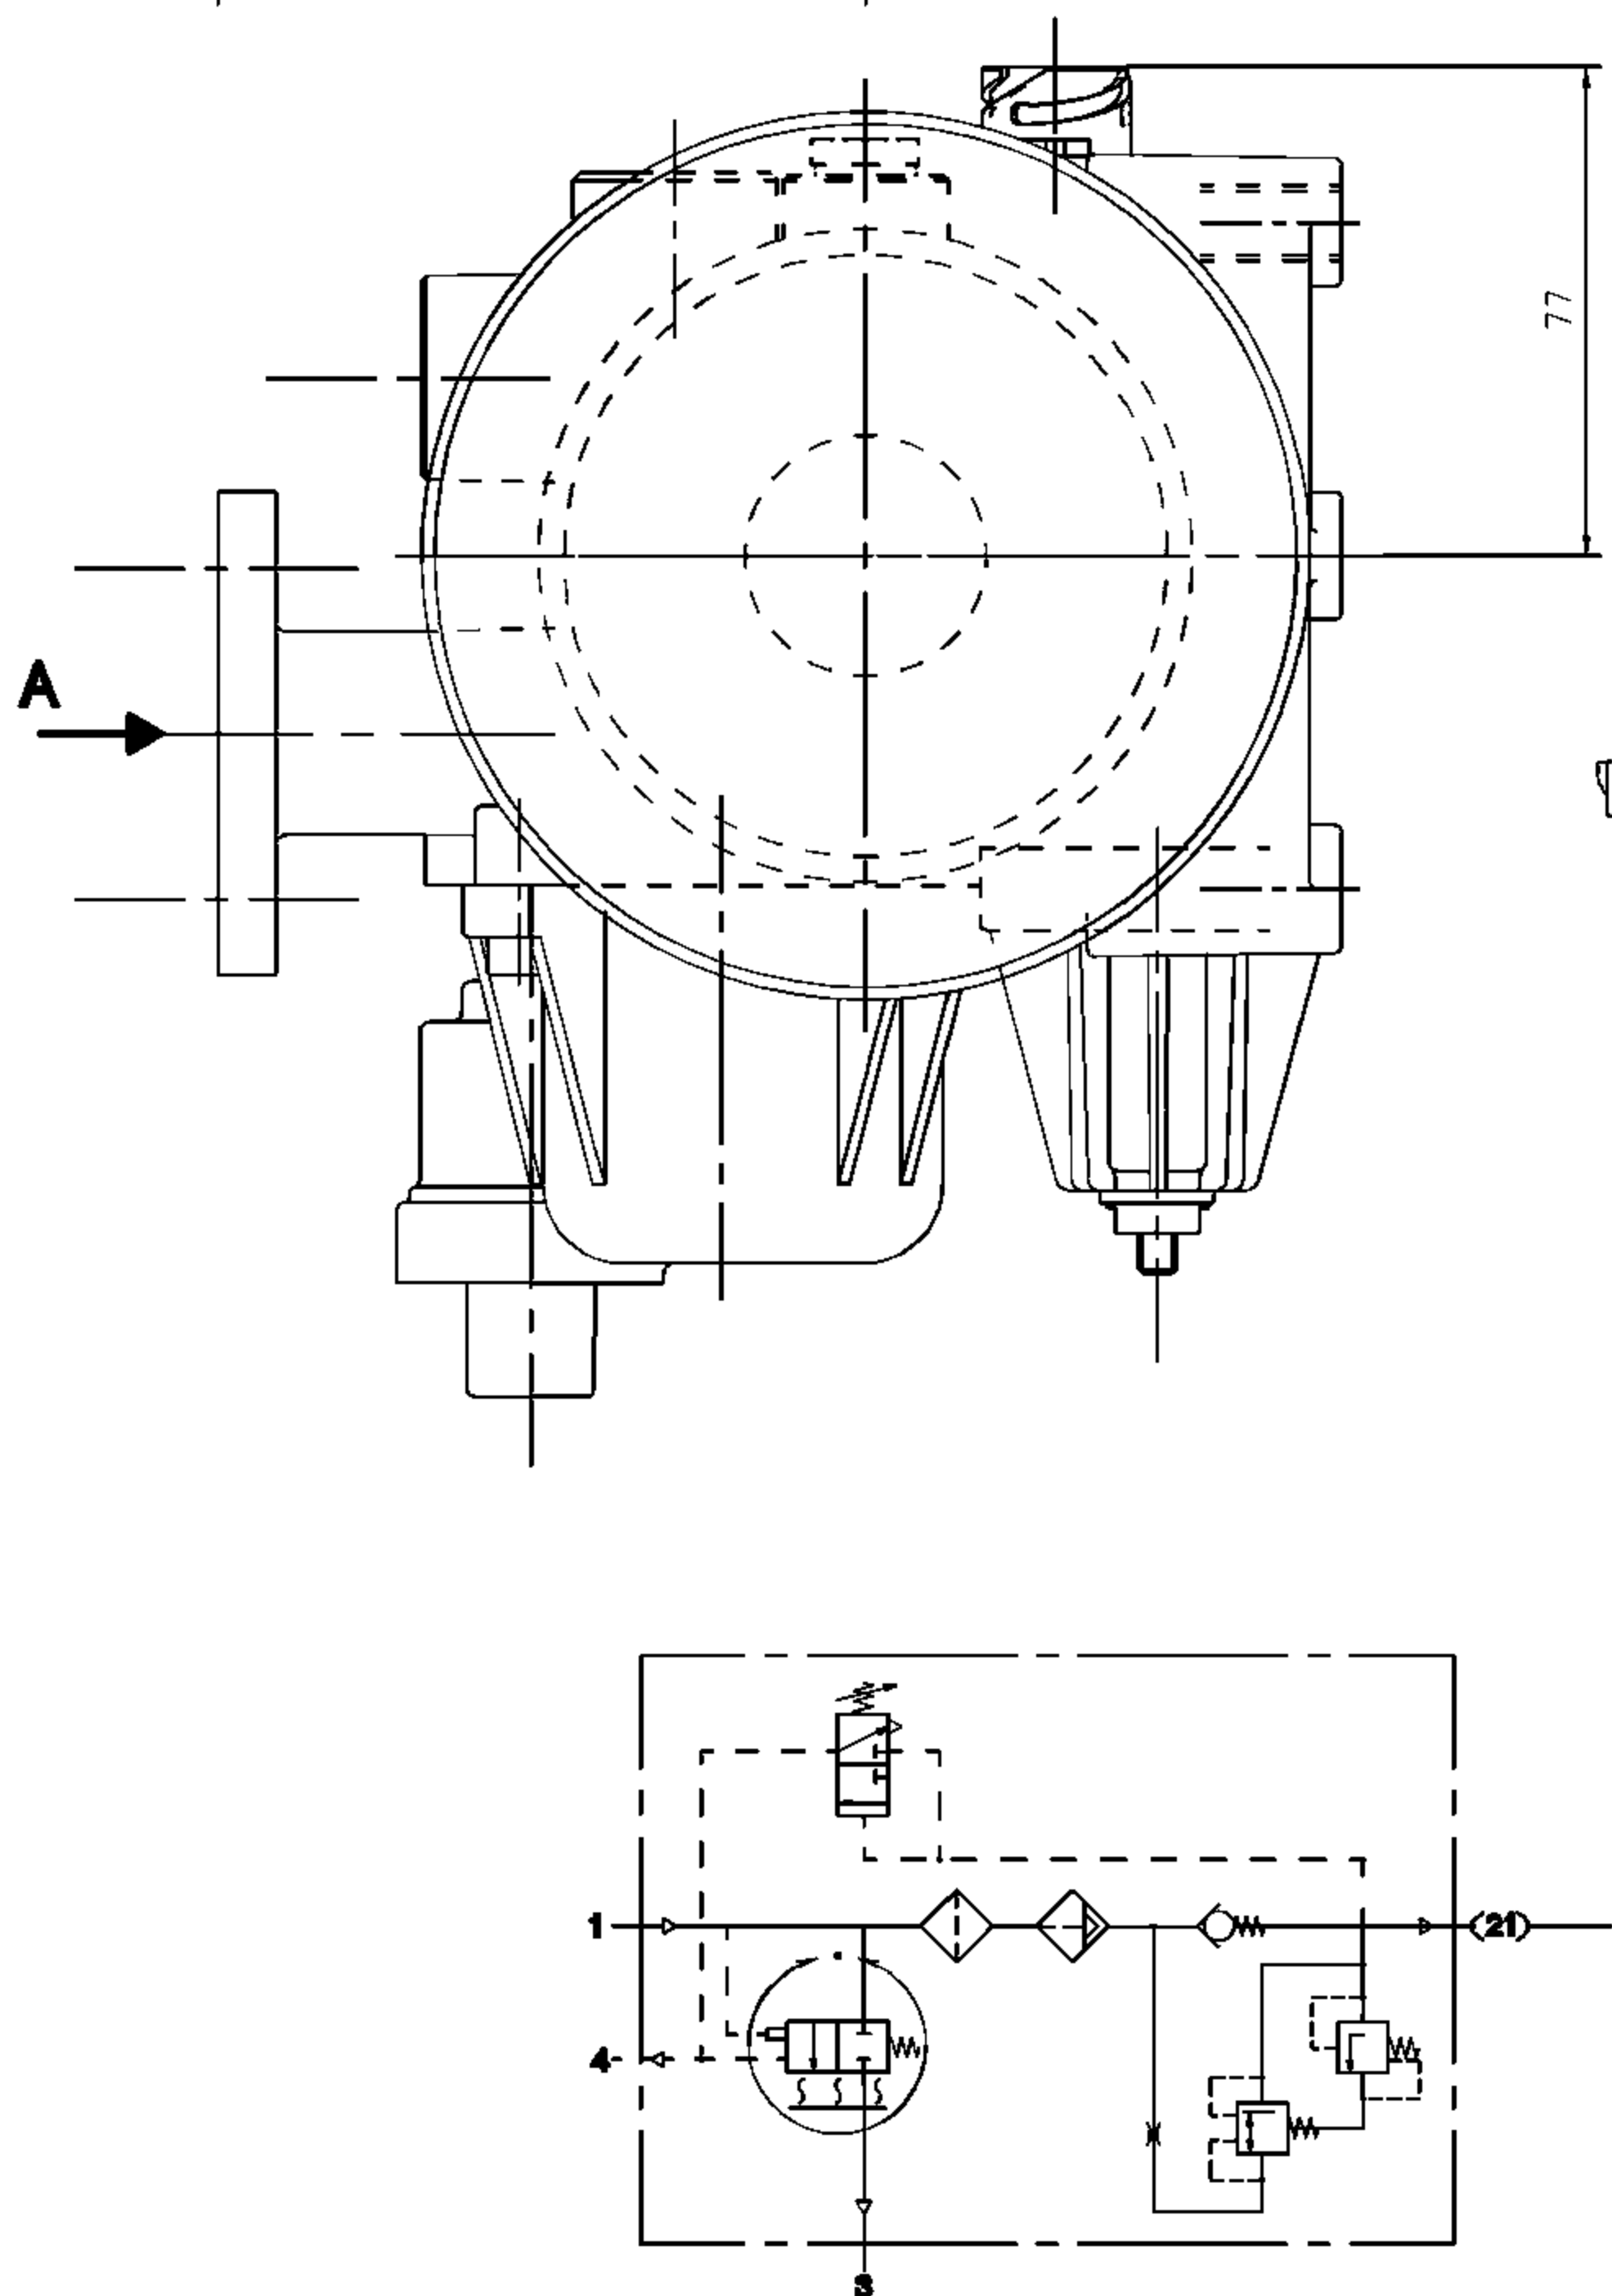

DRAWING PRODUCED ON CADAM
MANUAL CHANGES PROHIBITED

[illegible]