PART CODE	MATERIAL	SURFACE PROTECTION
I	ALUMINIUM ALLOY	CHROMATED
II	STEEL	PAINTED
III	PLASTIC	NO TREATMENT

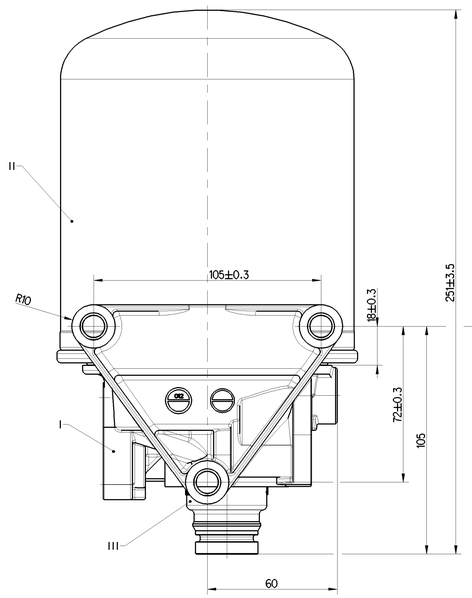

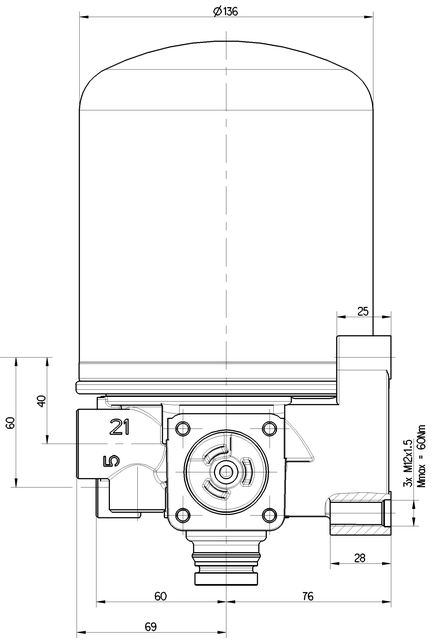

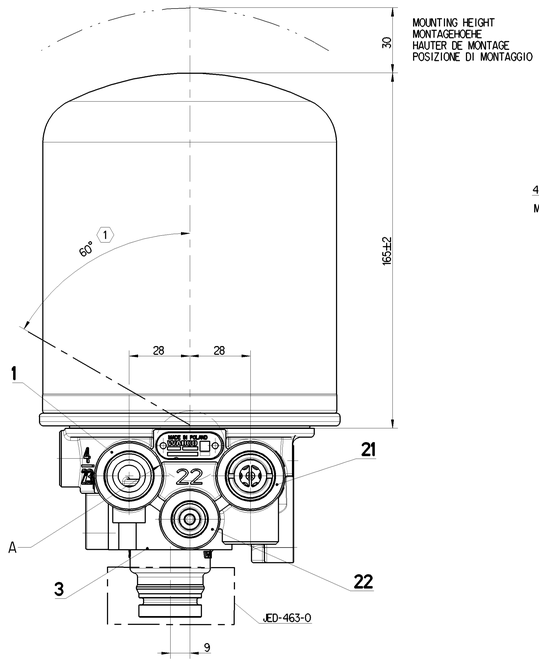

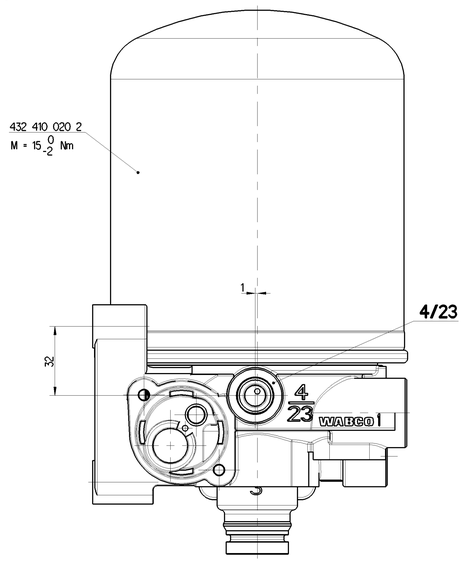

TECHNICAL DATA. TECHNISCHE DATEN. CARASTERISTIQUES TECHNIQUES. CARATTERISTICHE TECNICHE

THERMAL RANGE OF CONTINUOUS APPLICATION:
TERMISCHER DAUERANWENDUNGSBEREICH:
PLAGE DE TEMPERATURE EN UTILISATION CONTINUE:
COMPO DI APPICAZIONE CONTINUA: -40°C... +65°C

RESISTANCE TO HEAT:
WAERMEBESTAENDIGKEIT:
RESISTANCE A LA CHALEUR:
RESISTANZA AL CALORE: +80°C MAX

MEDIUM: COMPRESSED AIR
MEDIUM: DRUCKLUFT
FLUIDE: AIR COMPRIME
FLUIDO: ARIA COMPRESSA

WORKING PRESSURE:
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D' ESERCIZIO: Pe MAX+13 bar

MAX. PREMISSIBLE FREQUENCY
MAX. ZULAESSIGE FREQUENZ
MAX. ADMISSIBLE FREQUENZE
MAX. AMMISIBLE FREQUENZA: 50 Hz

MAX. PREMISSIBLE ACCELERATION
MAX. ZULAESSIGE BESCHLUNIGUNG
ACCELERATION MAX. ADMISSIBLE
ACCLERAZIONE MAX. AMMESA: ±10 g

COMBINED UNLOADER:
DRUCKREGLER:
REGULATEUR DE PRESSION:
GRUPPO DI REGULAZIONE:

CUT OUT PRESSURE:
ABSCHALTDRUCK:
PRESSION D'OUVERTURE:
PRESSIONE D'APERTURA: ≤ 13.0 bar

TORQUES FOR CONNECTIONS:
ANZUNGSMOMENT FUER EINSCHRAUBSTUTZEN: M16x1.5: Mmax = 34 Nm
COUPLE DE SARRAGE DES RACCORDS: M22x1.5: Mmax = 53 Nm
COPPIA DI SERRAGGIO DEI RACCORDI:

(1) INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D' INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

PERMITED SILENCER:
FREIGEGEBENER GERAEUSCHDAEMPFER 432 407 012 0
SILENCIEUX PERMIS
SILENZIATORE AMMESSO

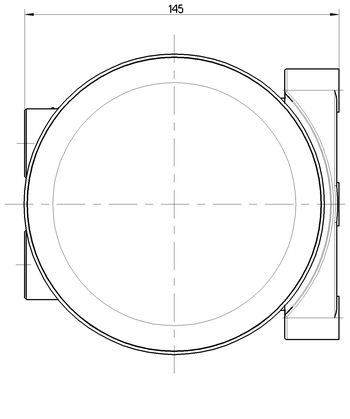

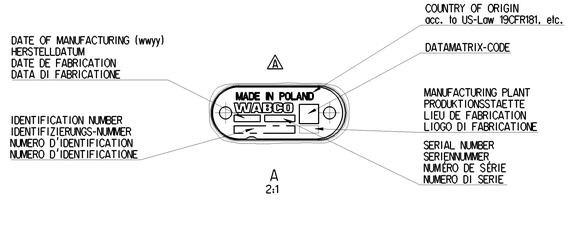

A
2:1

PORT ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNCTION FONCTION FUNZIONE	THREAD GEWINDE FILETAGE FILETTATURA
1	FROM THE COMPRESSOR VOM KOMPRESSOR PROVENANT DU COMPRESSEUR PROVENIENTE DEL COMPRESSORE	M22x1.5 JED-388
21	TO THE RESERVOIRS ZU DEN LUFTBEHAEL TERN AUX RESERVOIR AL SERBATOII PER	M22x1.5 JED-388-4
22	TO THE RESERVOIRS FOR REGENERATED AIR ZUM REGENERATIONS-LUFTBEHALTER AUX RESERVOIRS D' AIR REGENERE AL SEBRATOII PER L' ARIA RIGENERATIA	M16x1.5 JED-388
4/23	CONTROL PORT STEUERANSHLUSS ORIFICE DE COMMANDE ORIFIZIO DI COMANDO	M16x1.5 JED-388
3	EXHAUST FOR COMPRESSED AIR ENTLUEFTUNG FUER DRUCKLUFT ECHAPPEMENT POUR AIR COMPRIME SCARICO PER AIRIA COMPRESSA	SILENCER

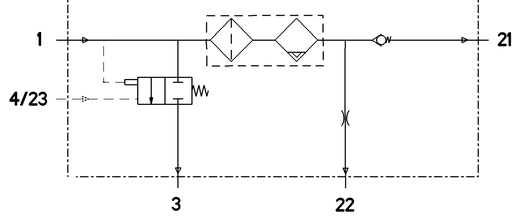

Dati e previsioni impegnano a fornire solo quando espressamente accettati per iscritto dall'Ufficio Tecnico della Società. Ogni utilizzazione, riproduzione o cessione di questo documento senza autorizzazione scritta della Società obbligherà i trasgressori al risarcimento dei danni. Tutti i diritti sono riservati in caso di concessione di brevetto o registrazione di modello di utilità.
Data and forecasts are binding only when expressly accepted in writing by the Company's Technical Department. Any unauthorized use, reproduction or disclosure of this document will bind the infringer to pay damages. All rights reserved in the event of the grant of patent or registration of utility model or design.

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP	Copyright WABCO®	WABCO	
Further Technical Data, Product Specification	Date / Drawn: 2022-08-04 Kurzynski	AIR DRYER	
Doc. Code: 035 Sheet: 1 To 6	Checked: 2022-09-09 Kasirzewa	LUFTTROCKNER	
General Tolerances JED-261	210 x 180 x 220	DESSICATEUR D' AIR	
Range of nominal dimensions in mm	Dimensions in mm	ESSICATORE D' ARIA	
Class (1) ↓ | > 50 ≤ 180 | > 180 ≤ 400 | > 400 ≤ 1000	Mass: 3.87 kg	Scale: 1:1	Material No.: 432 421 002 0
Fine ±0.5 ±1 ±1.5 ±2	Size: A 0	CAD System: CREO	Doc.Code: 005
Medium X ±1 ±2 ±3 ±4 ±3°	EDM-No.: 510690	Revision: 2 x A	Techn. Regs.: 5050
Coarse ±2 ±3.5 ±5 ±6.5	Date of first issue: 2013-02-15	Language: ML	Sheet: 1/1
Tapped Holes acc.: JED-388	Replacement for: REMOVED FROM 432421010		
(1) Tolerance Class Applied Crossmarked			

100mm

Pos. 4 (WABCO_JED_Version_Rev_A_4202100020_.dwg)