
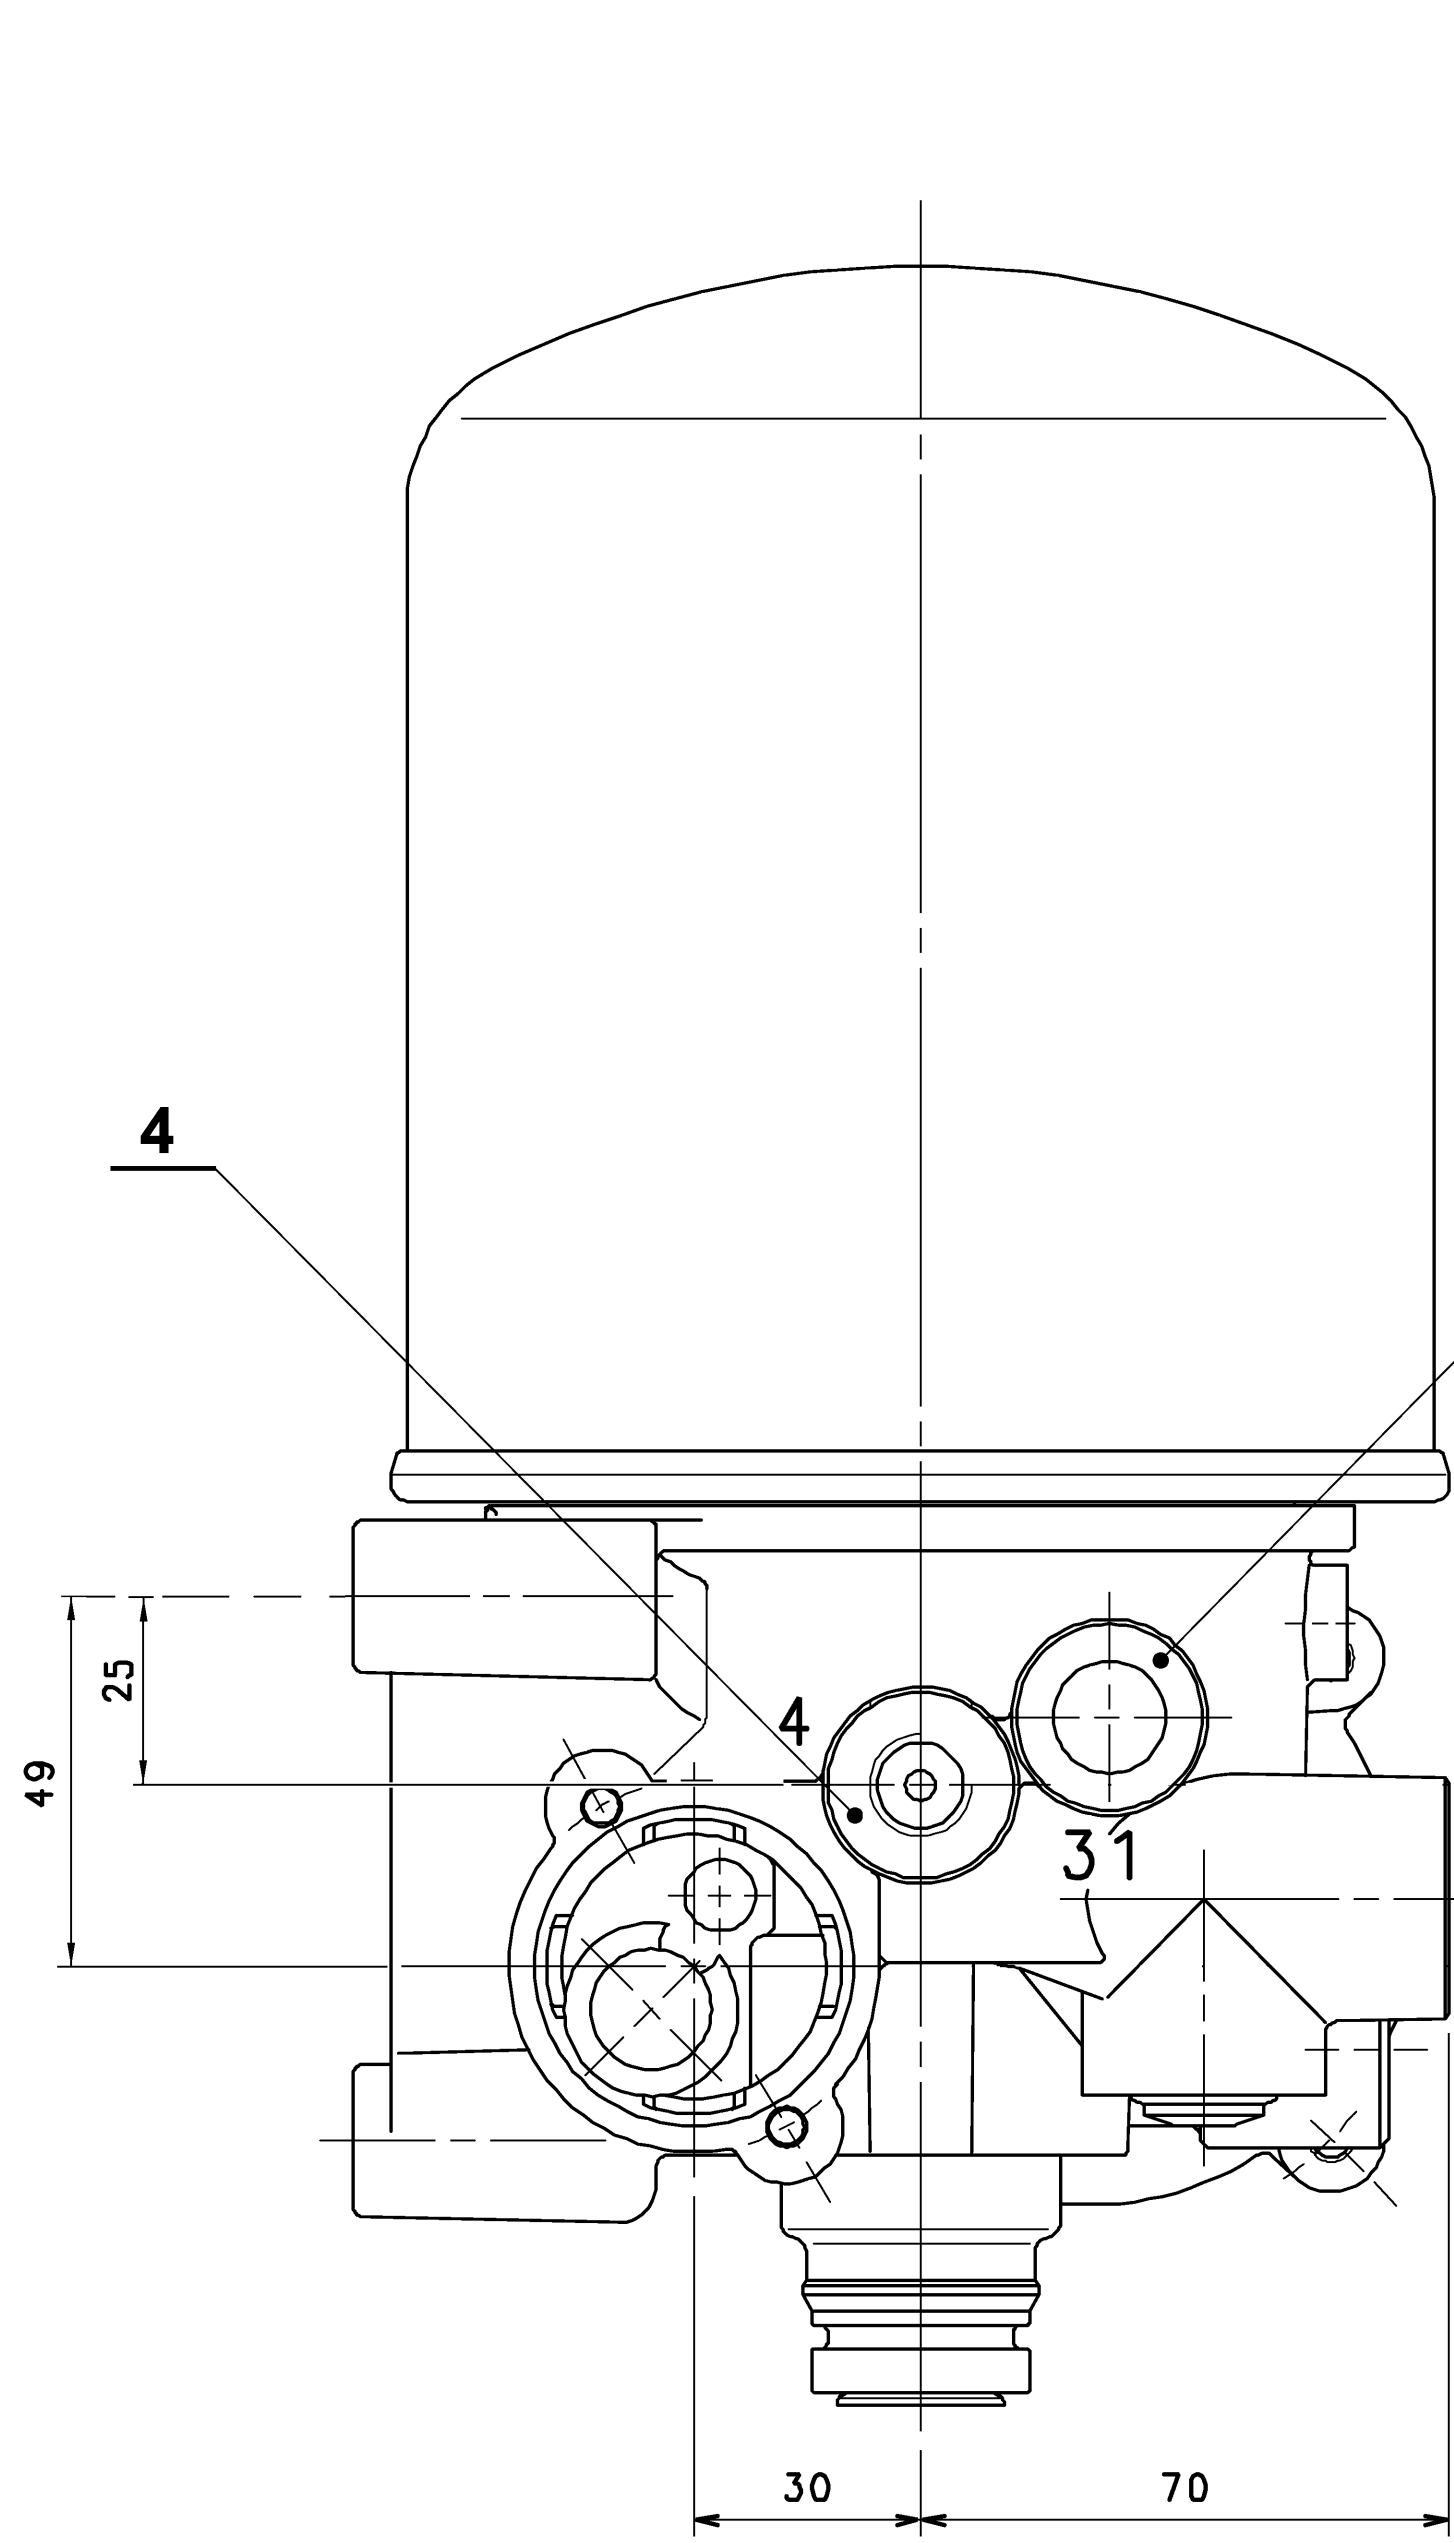
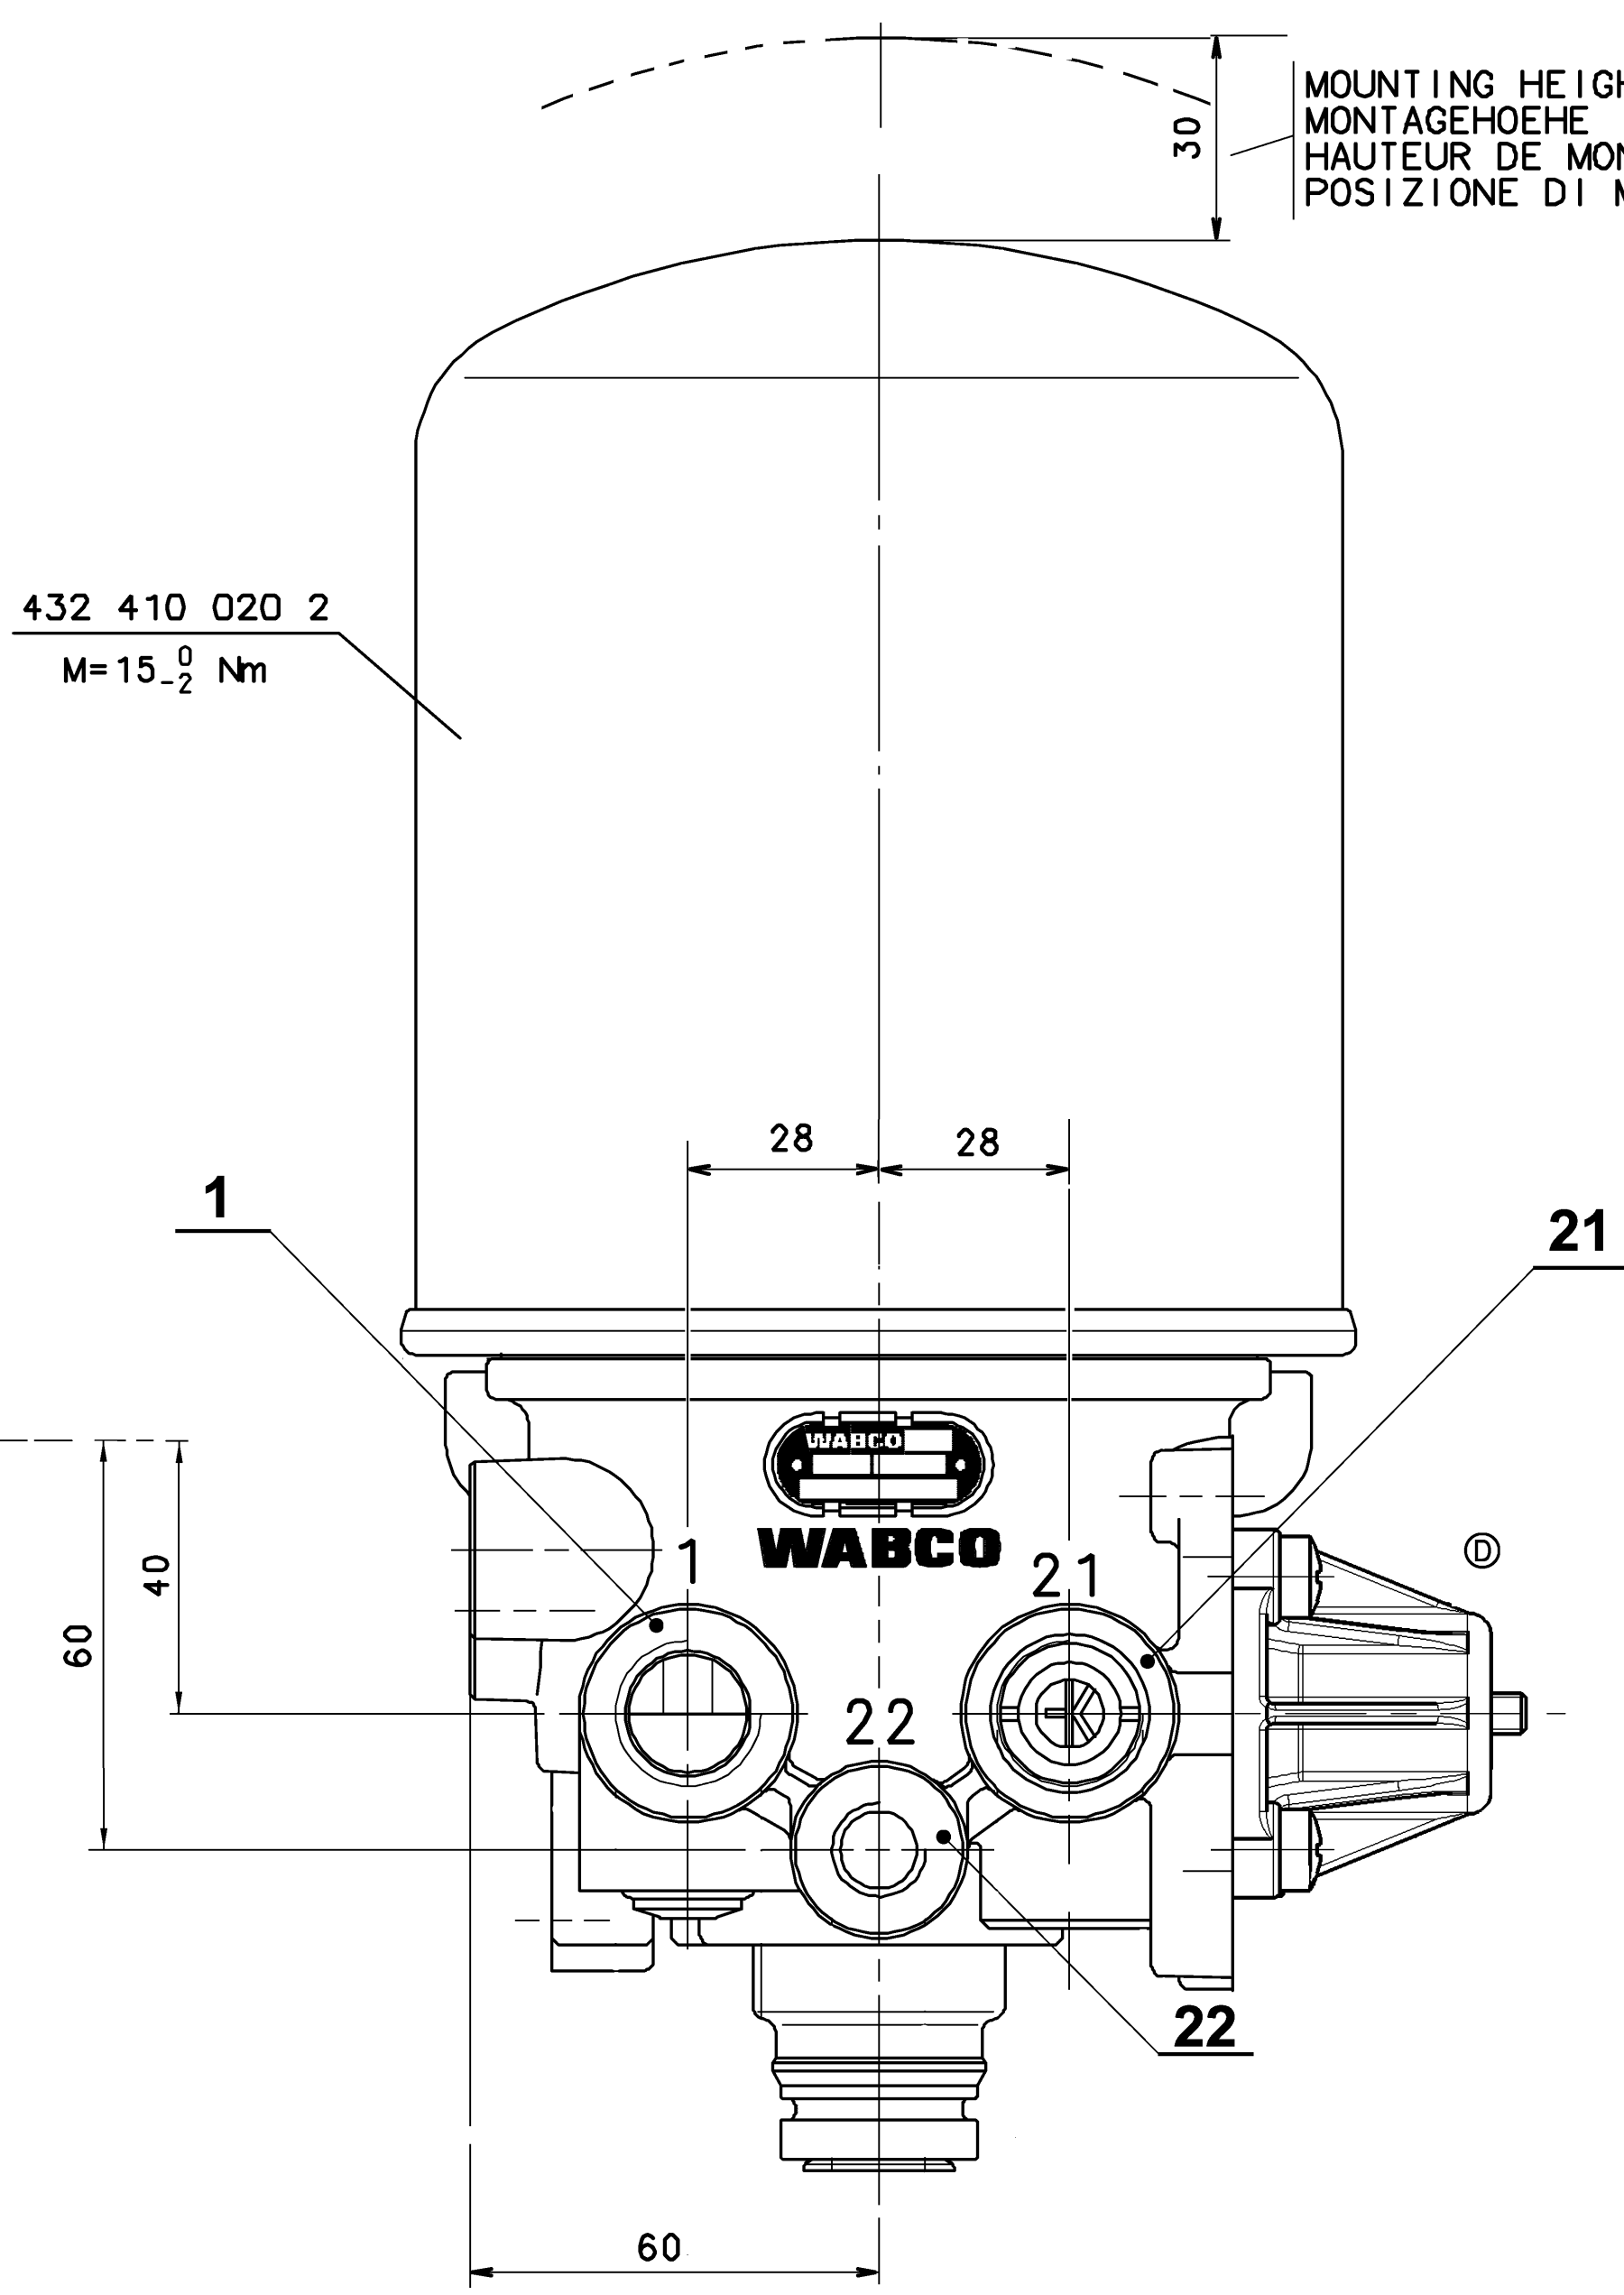
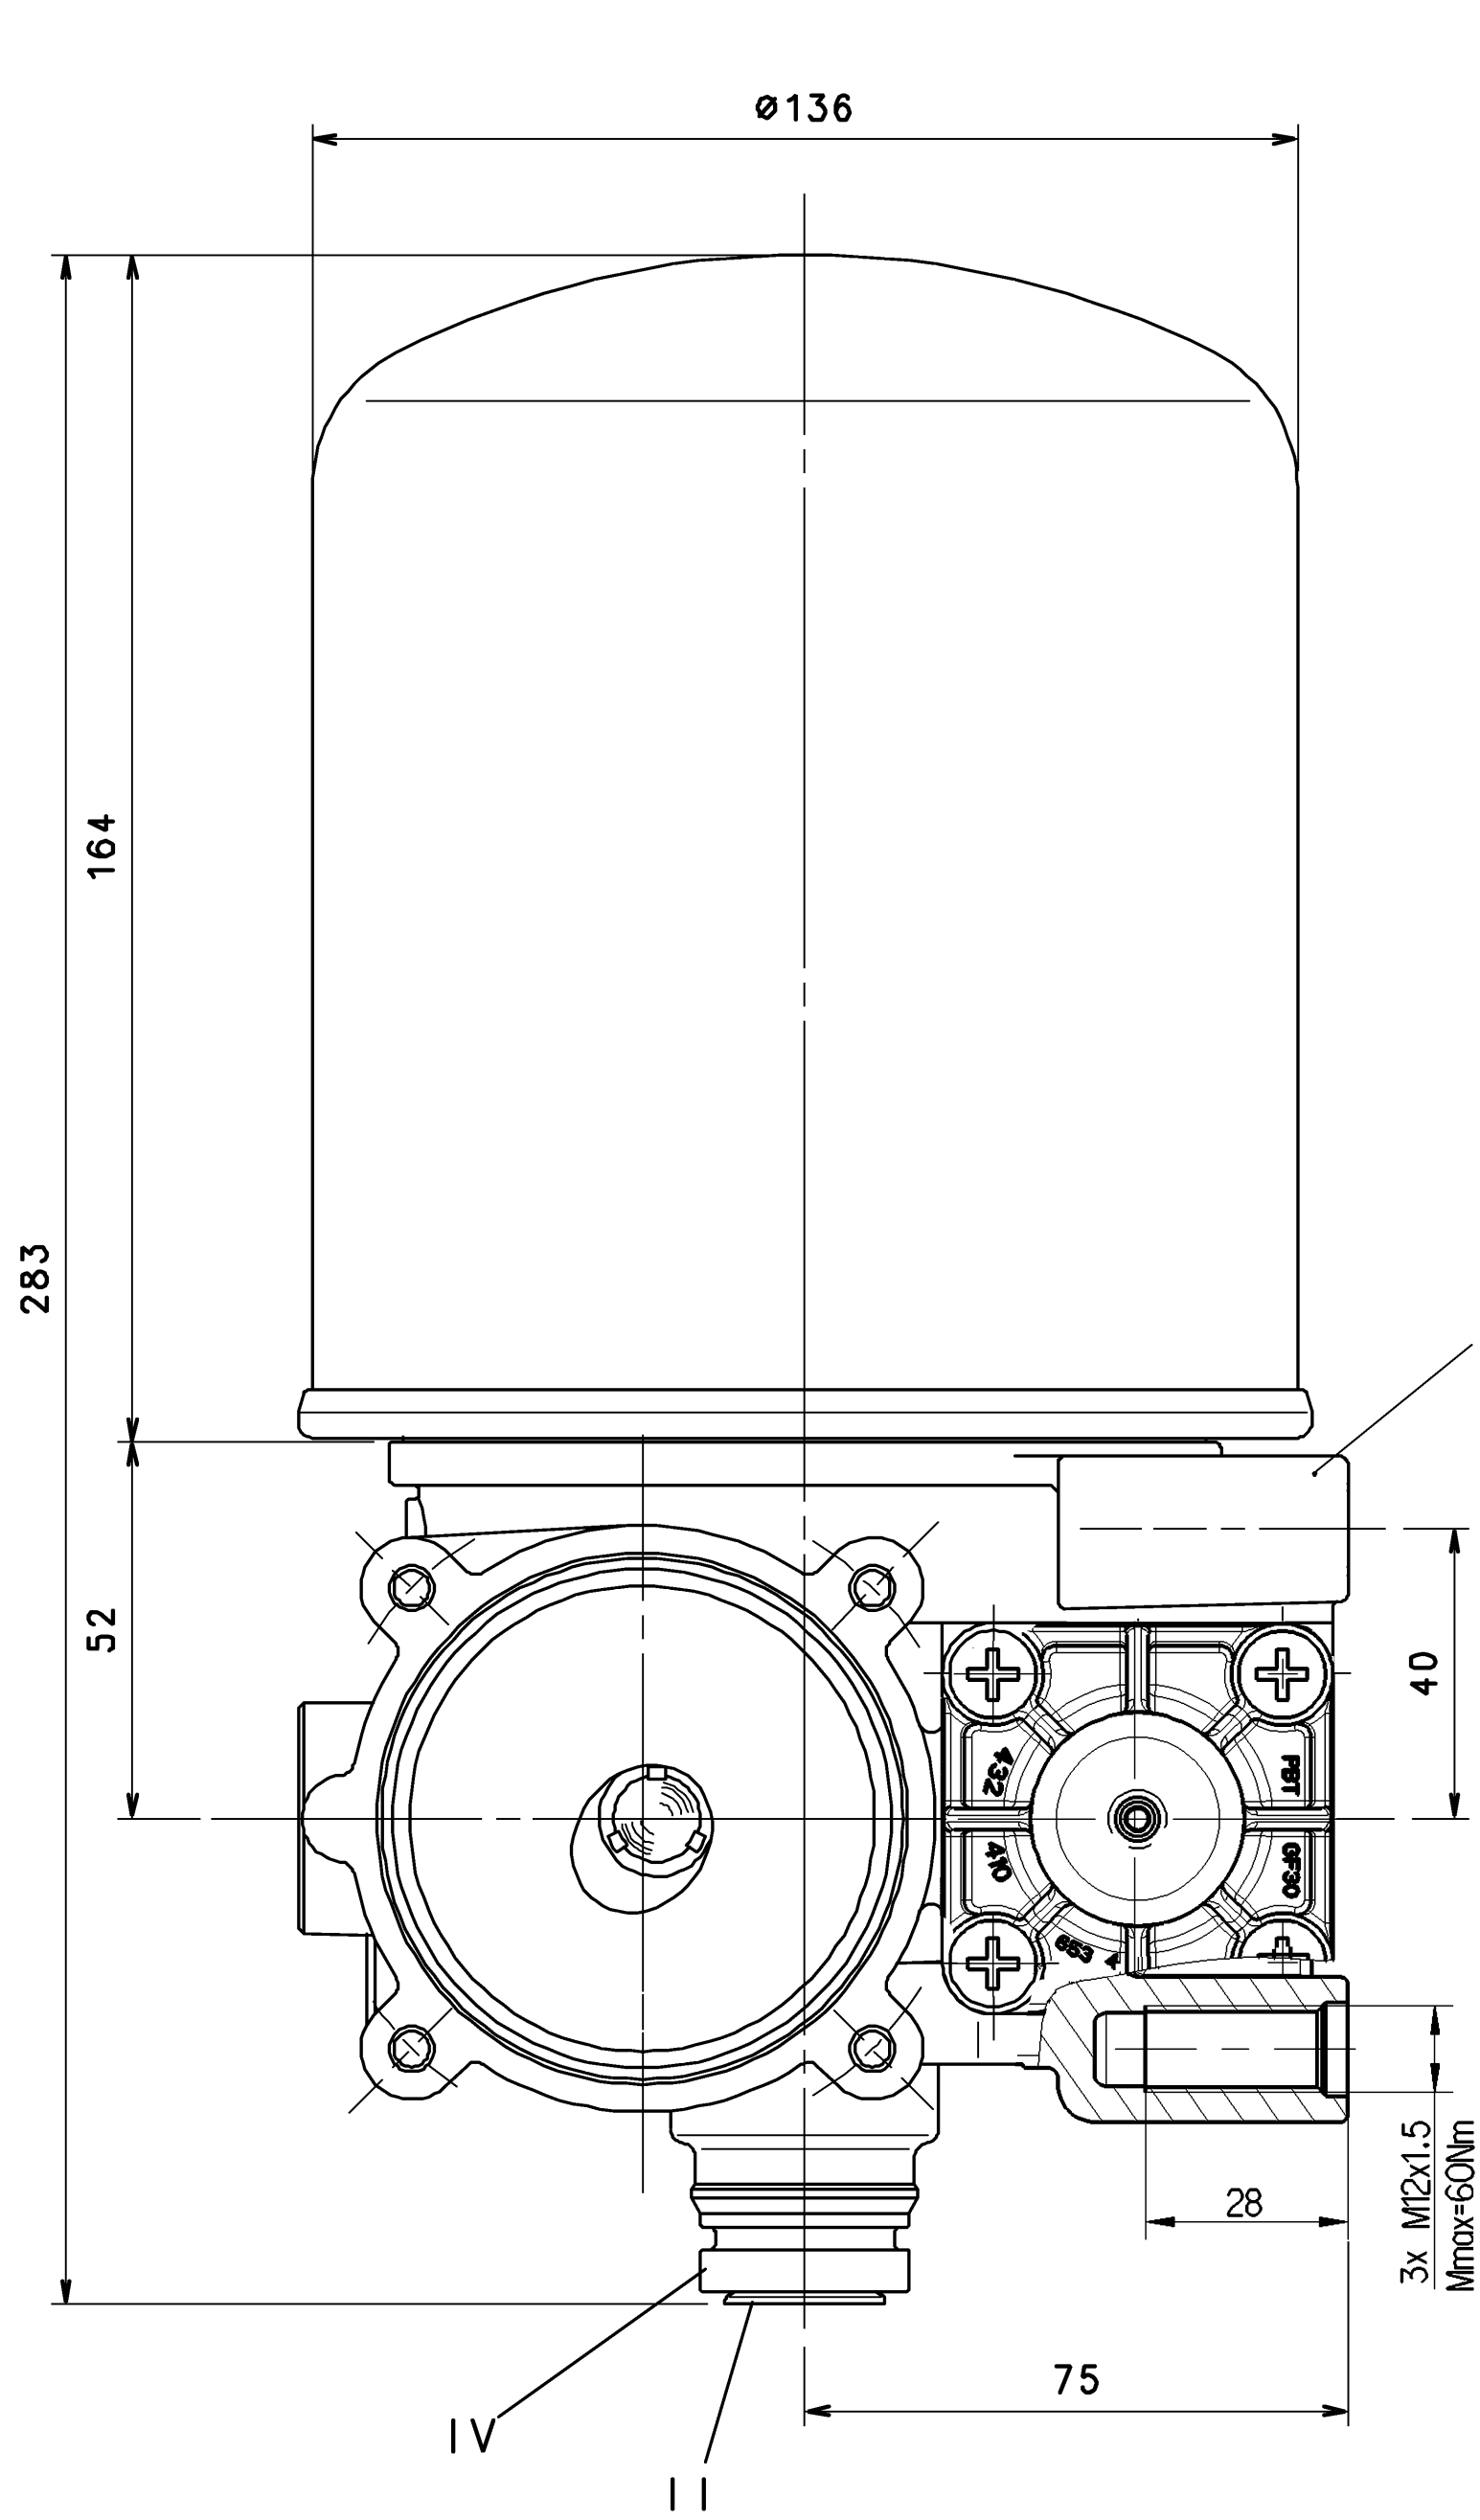


EXTERNAL SURFACE AEUSSERE OBERFLAECHE SURFACE EXTERIEURE SUPERFICIE ESTERNA			
I	JED-259		
II	JED-256		
III	JED-471 BLACK / SCHWARZ		
IV	PLASTIC/KUNSTOFF		

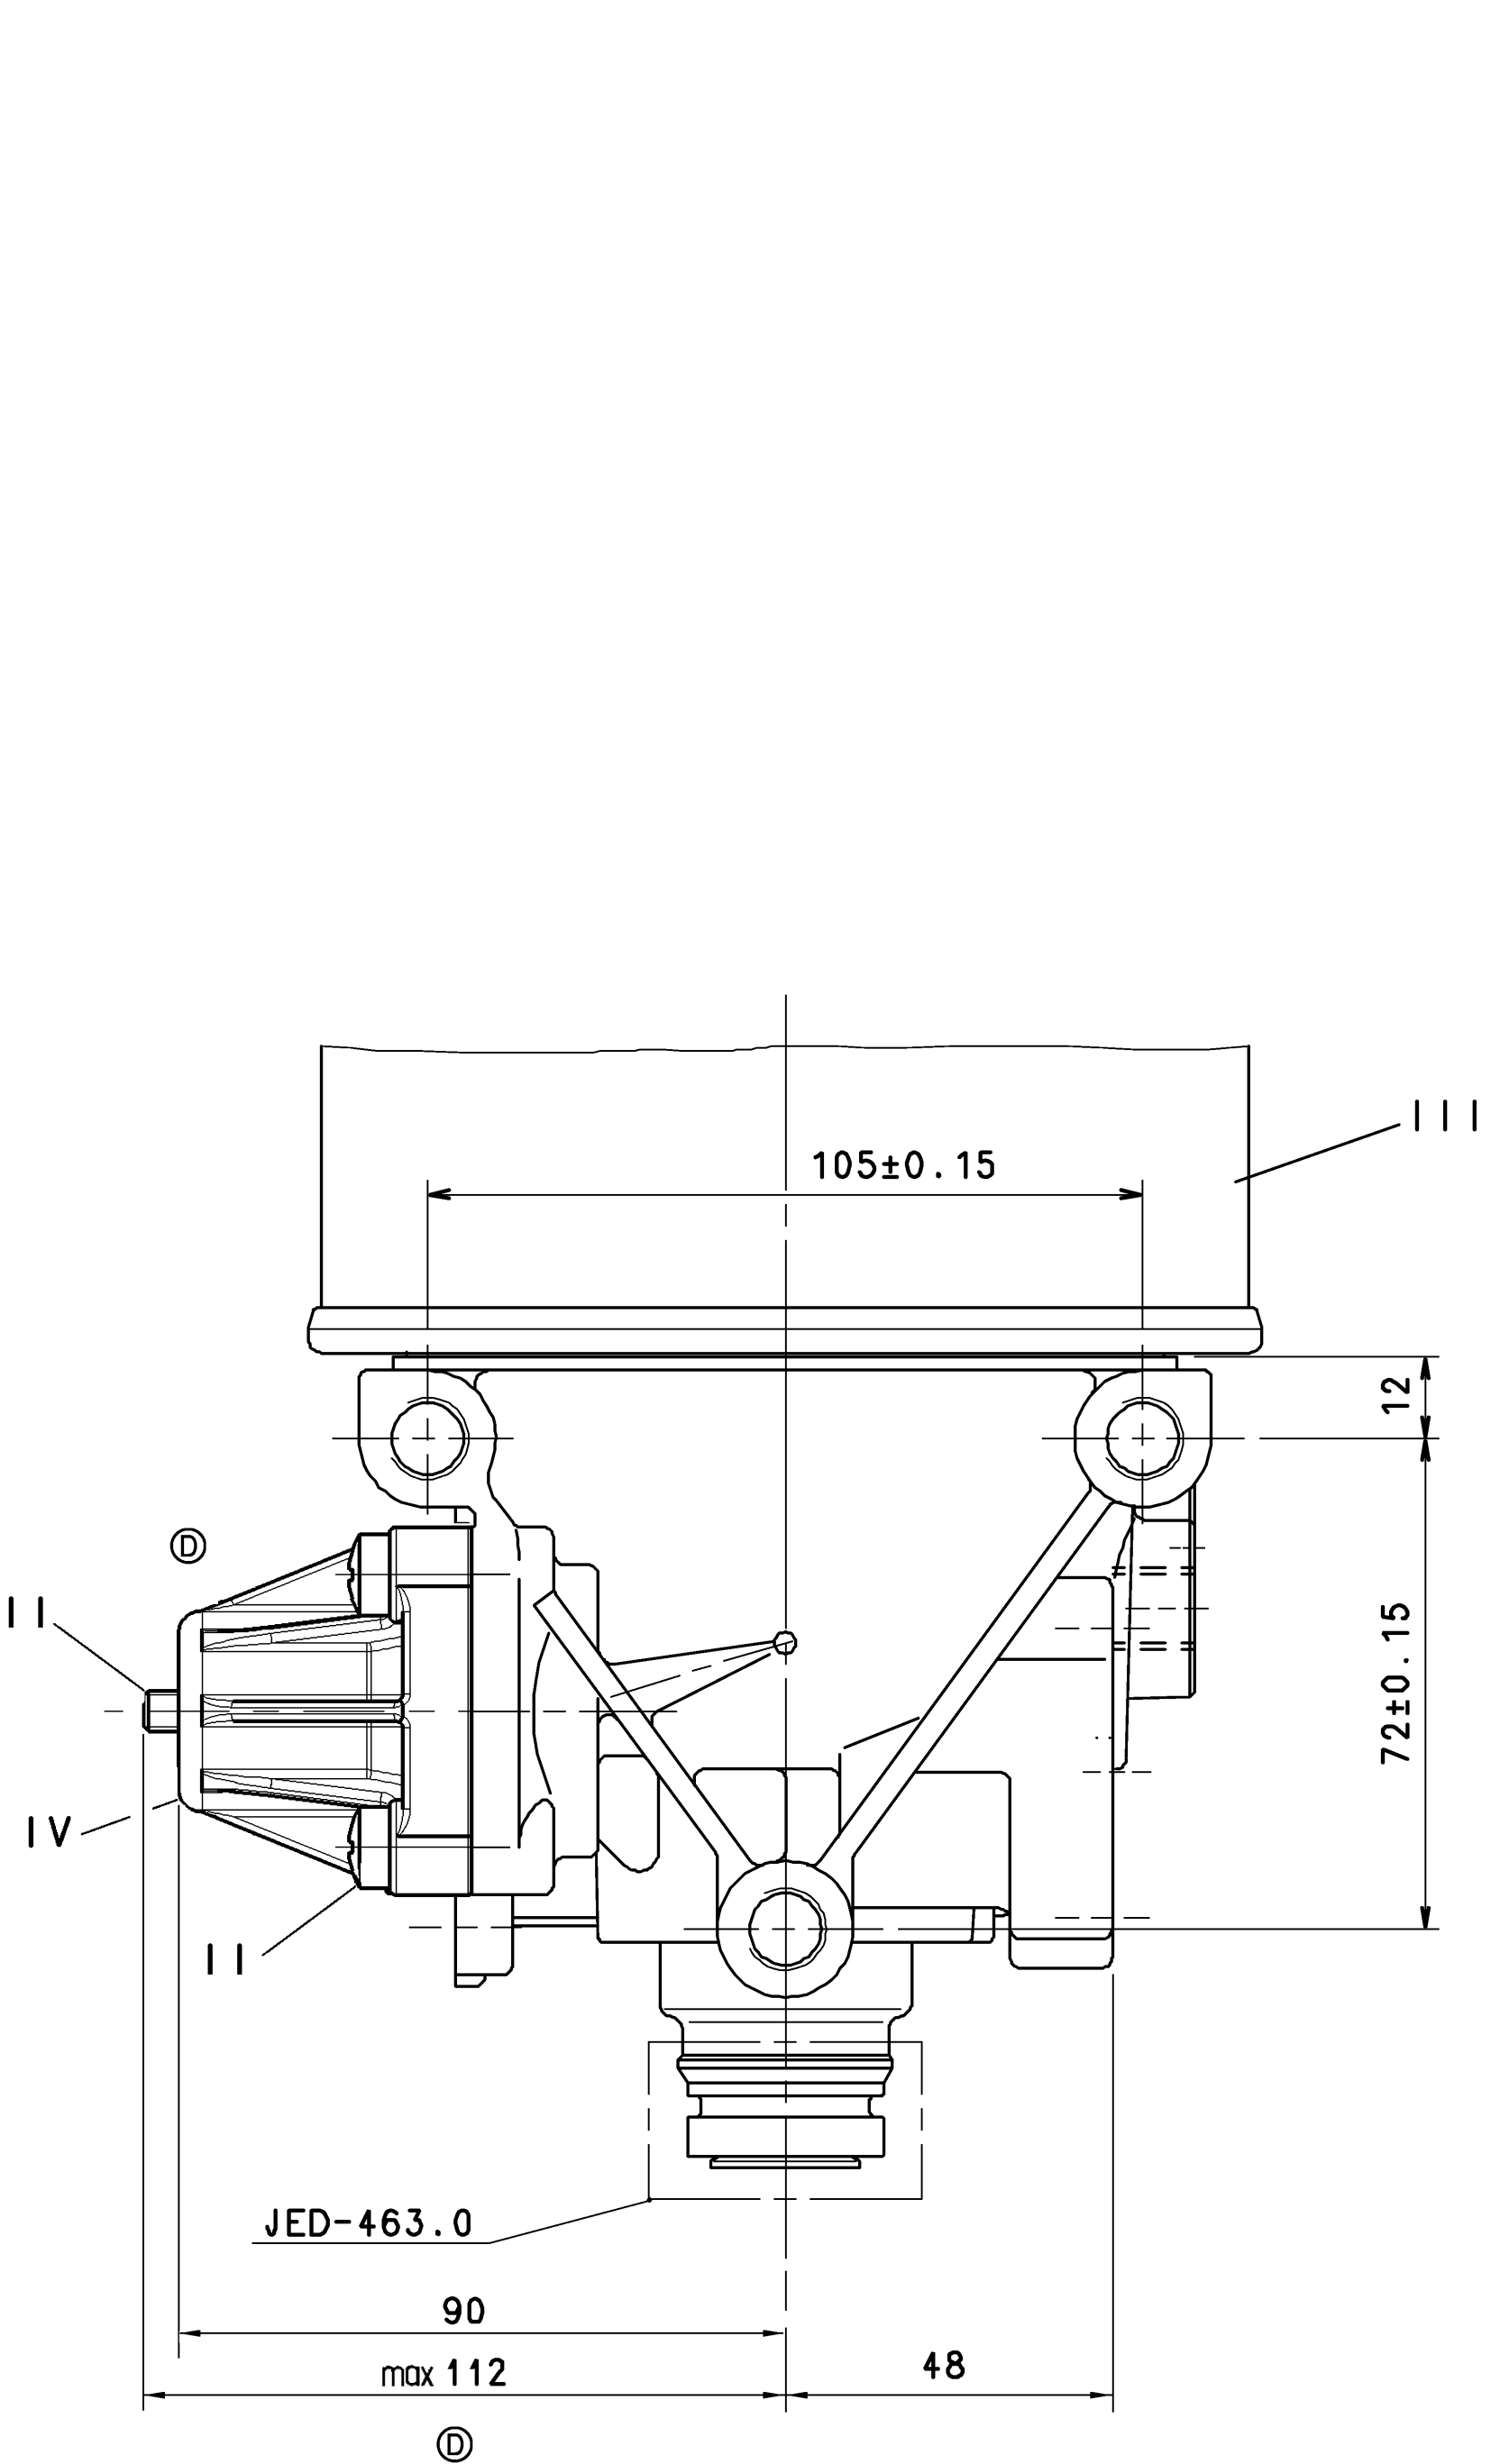

THERMAL RANGE OF CONTINUOUS APPLICATION:
THERMISCHER DAUERANWENDUNGSBEREICH:
PLAGE DE TEMPERATURE EN UTILISATION CONTINUE:
COMPO DI APPLICAZIONE CONTINUA:

RESISTANCE TO HEAT:
WAERMEBESTAENDIGKEIT:
RESISTANCE A LA CHALEUR:
RESISTANZA AL CALORE:

MEDIUM: COMPRESSED AIR
MEDIUM: DRUCKLUFT
FLUIDE: AIR COMPRIE
FLUIDO: ARIA COMPRESSA

WORKING PRESSURE:
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

MAX. PERMISSIBLE ACCLARATION:
MAX. ZULAESSIGE BESCHLEUNIGUNG:
ACCELERATION MAX. ADMISSIBLE:
ACCELERAZIONE MAX. AMMESSA:

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN:
COUPLE DE SERRAGE DES RACCORDS:
COPPIA DI SERRAGGIO DEI RACCORDI:

GOVERNOR
GOVERNOR
PILOTAGE
COMANDO

CUT OUT PRESSURE
ABSCHALTD RUCK
PRESSION DE DECL
PRESSIONE D'APERT




OPERATING RANGE
SCHALT SPANNE
PLAGE DE REGULATION
GAMMA DI REGOLAZIONE

SAFETY PRESSURE OF THE PURGE VALVE AT
SICHERHEITSDRUCK DES LEERLAUFVENTILES BEI

10 ±0.2 bar

0.7 ^{+0.8}₀ bar

$\dot{V} = 100 \text{ dm}^3/\text{min}$ 12+4 bar (174+56 PSI)

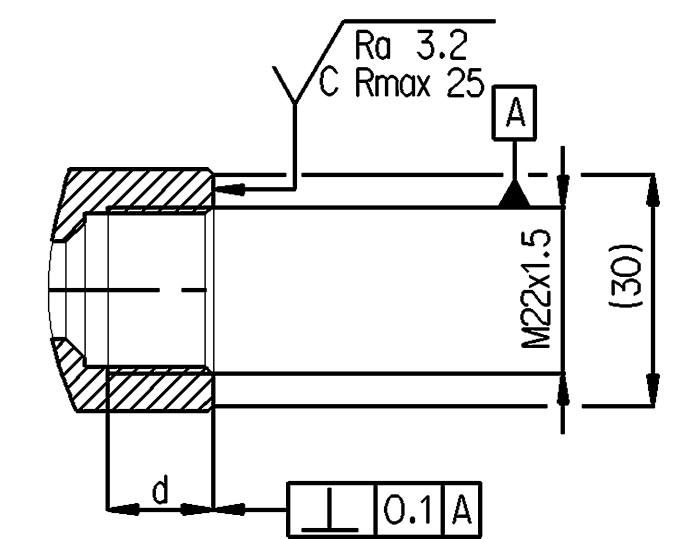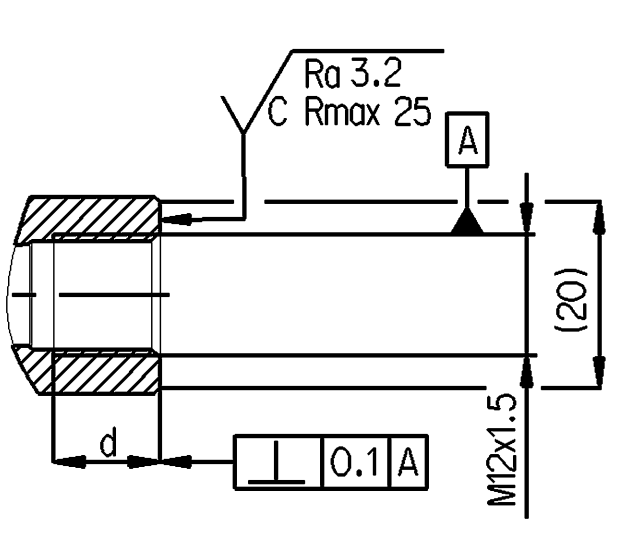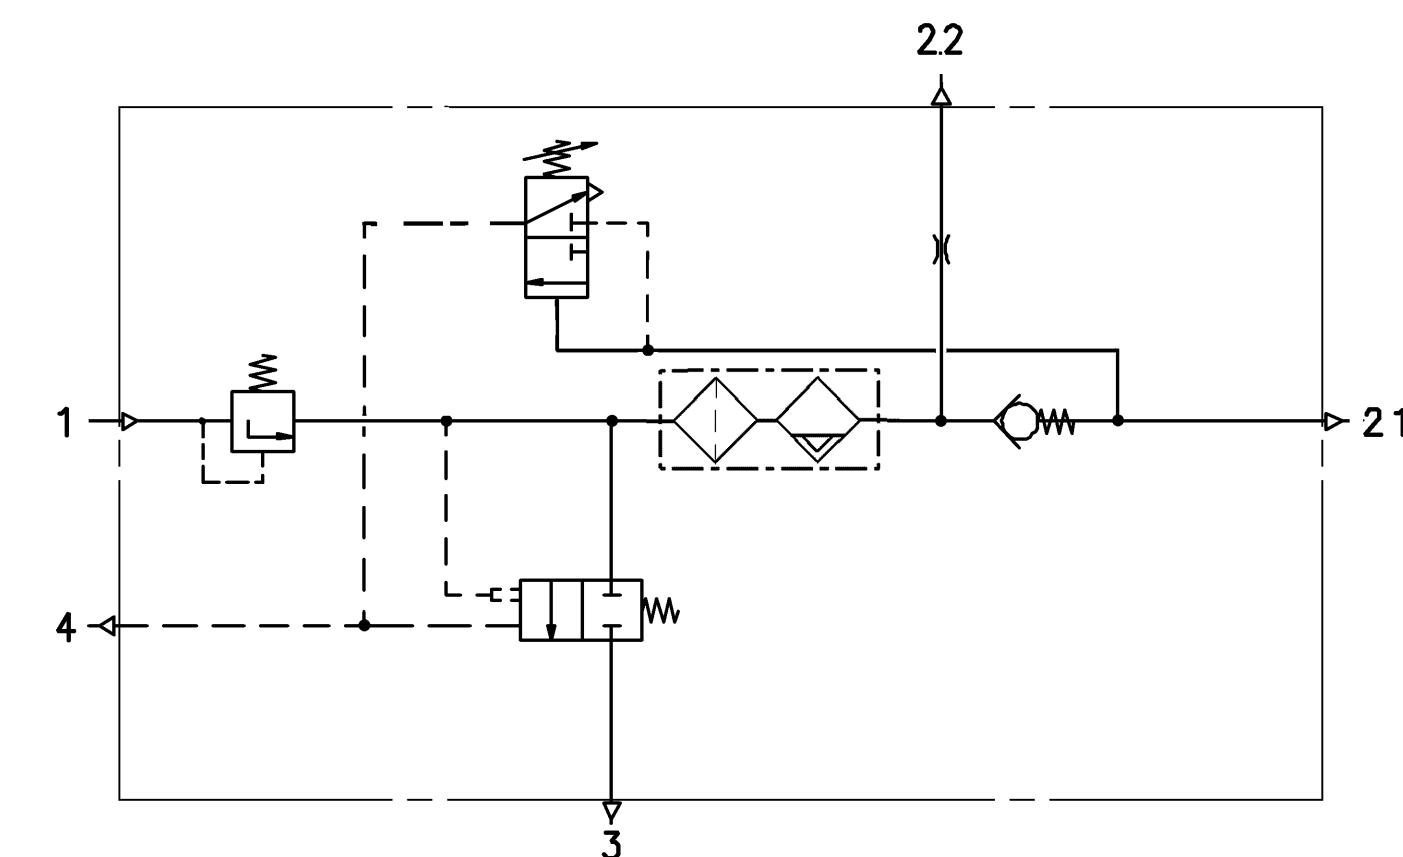

PORTS ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNKTION FONCTION FUNZIONE	THREAD GEWINDE FILETAGE FILETTATURA
1	FROM THE COMPRESSURE VOM LUFTPRESSER PROVENANT DU COMPRESSEUR PROVENIENTE DEL COMPRESSORE	M22x1.5 d=15
21	TO THE RESERVOIRS ZUM LUFTBEHAELTERN AU SERBATOIR PER AL SERBATOIR PER	M22x1.5 d=24.5
22	TO RESERVOIR FOR REGENERATION AIR ZUM REGENERATIONS-LUFTBEHAELTER AU RESERVOIR D'AIR DE REGENERATION AL SERBATOIR PER L'ARIA RIGENERATA	M12x1.5 d=12
3	EXHAUST FOR COMPRESSED AIR ENTLUEFTUNG FUER DRUCKLUFT ECHAPPEMENT POUR AIR COMPRIE SCARICO PER ARIA COMPRESSA	—
4	CONTROL PORT STEUERANSCHLUSS ORIFICE DE COMMANDE ORIFIZIO DI COMANDO	M12x1.5 d=12

General Specification: JED-259-0 18214405-1 E				Copyright WABCO®				WABCO			
Further technical data: PS				Date: 2014-05-23				AIR DRYER			
Doc. Code: 0335				Sheet: 1 of 1				LUFTTROCKNER			
General Tolerances: JED-251				Checked: 2014-05-23				DESSICATEUR D'AIR			
Range of Nominal Dimensions (mm)				LITER				ESSICCATORE D'ARIA			
Class: 11				LITER				LITER			
Flow: 0.5 1.0 1.5 2.0				LITER				LITER			
Medium: X 1.5 2.0 3.0 4.0				LITER				LITER			
Diameter: 1.5 2.0 3.0 4.0				LITER				LITER			
Clearance: 2.0 3.5 5.0 6.5				LITER				LITER			
Tapped Holes: JED-152				LITER				LITER			
Tolerance Class: Applied Unrestricted				LITER				LITER			
A 0 TIF				164315				005 ML 1/1			