


DETAIL "A"

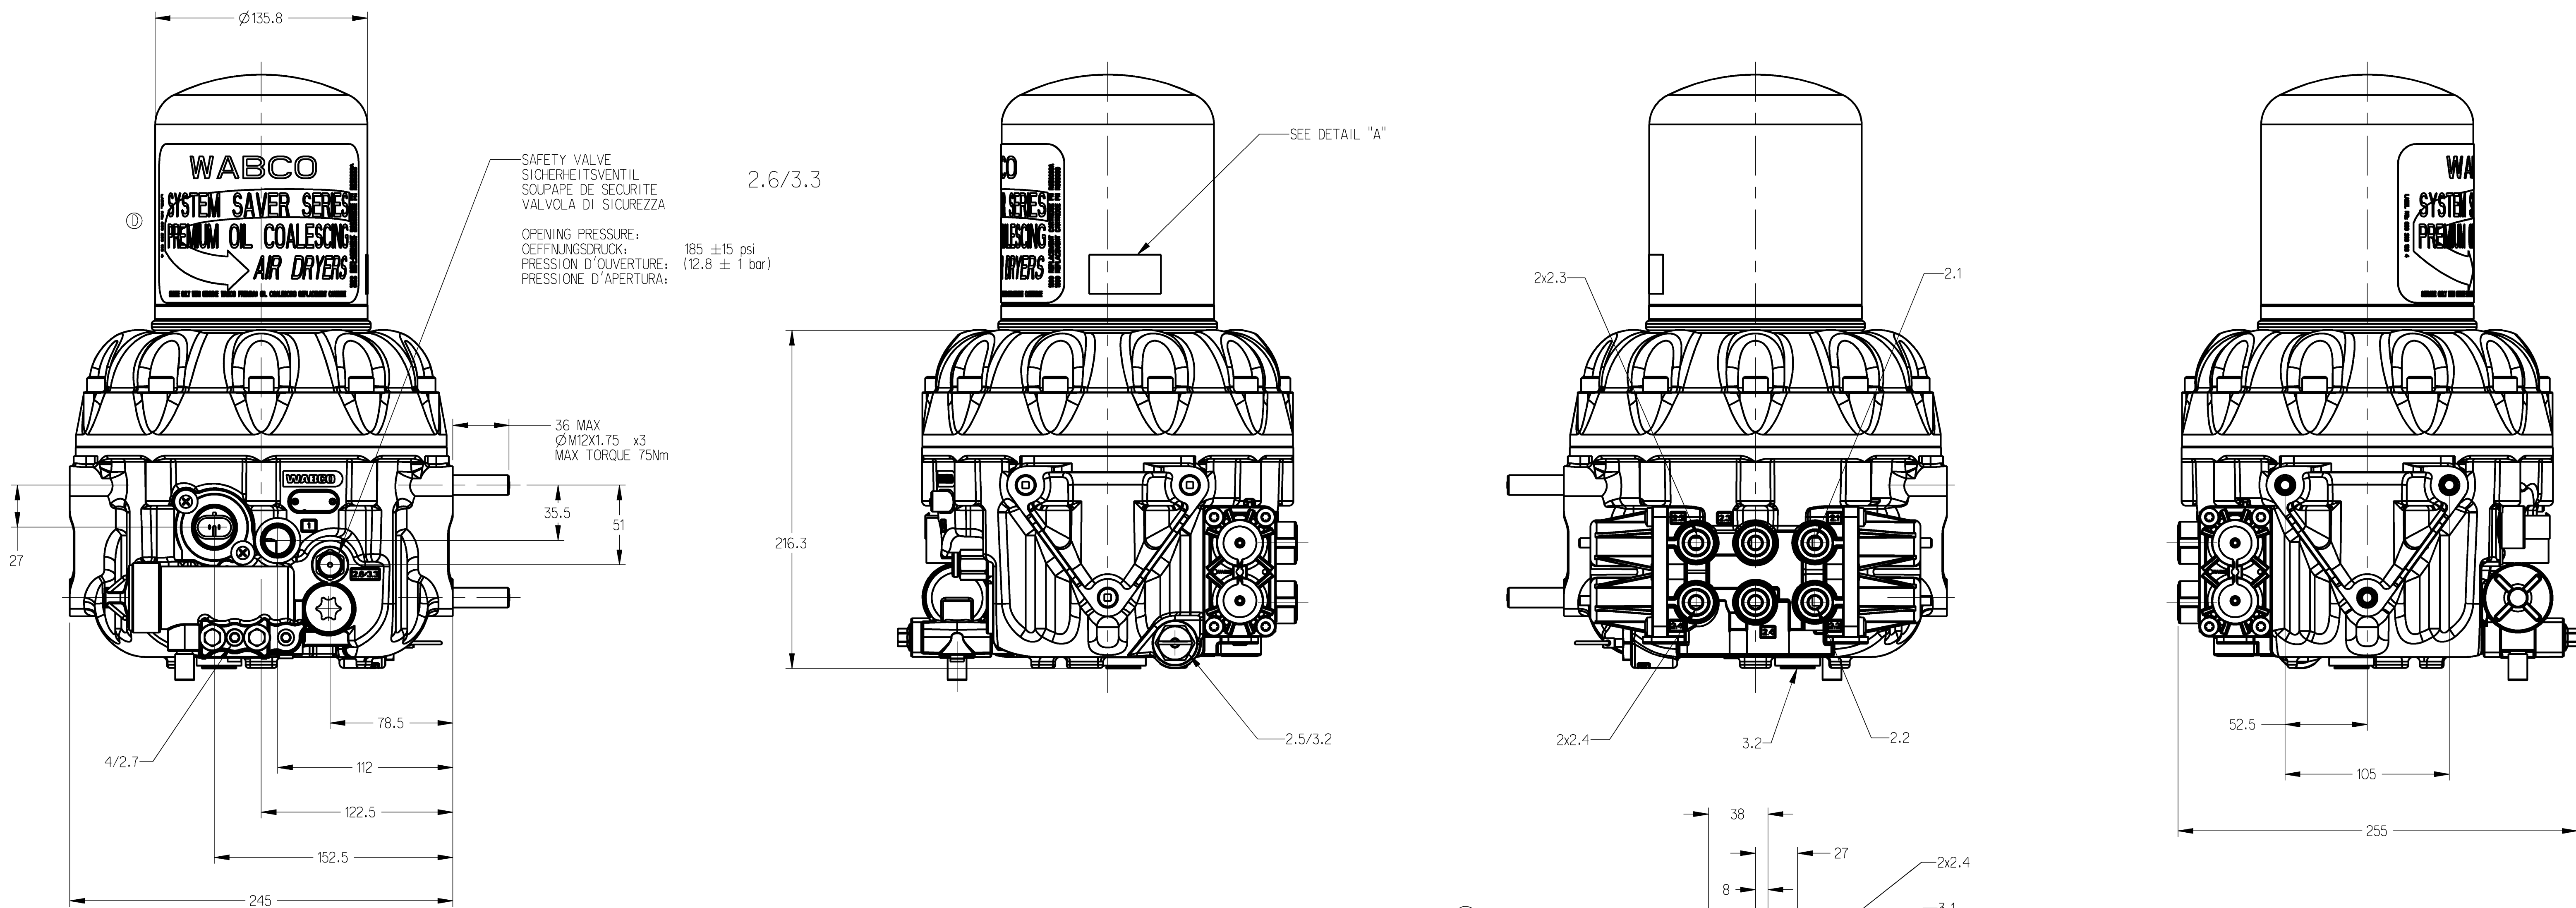

PORT ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNCTION FONCTION FUNZIONE	THREAD GEWINDE FILETAGE FILETTATURA	TORQUE FOR CONNECTIONS: ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: COUPLE DE SERRAGE DES RACCORDS: COPPIA DI SERRAGGIO DEI RACCORDI:
1	SUPPLY ENERGIEZUFUSS ALIMENTATION ALIMENTAZIONE	1/2"-14 NPTF	MAX. 50 Nm
2.1	SERVICE BRAKE BETRIEBSBREMS FREINAGE FRENATURA	3/8"-14 NPTF	MAX. 30 Nm
2.2	SERVICE BRAKE BETRIEBSBREMS FREINAGE FRENATURA	3/8"-14 NPTF	MAX. 30 Nm
2 x 2.3	TRAILER BRAKING SYSTEM ANHÄNGER BREMSANLAGE SYSTEME DE FREINAGE DE LA REMORQUE FRENATURA DEL RIMORCHIO	3/8"-14 NPTF	MAX. 30 Nm
4 x 2.4	AUXILIARY DEVICE NEBENVERBRAUCHER SERVITUDES SERVIZI AUSILIARI	3/8"-14 NPTF	MAX. 30 Nm
2.5/3.2	DRAIN VALVE ENTWÄSSERUNGSVENTIL VALVE DE PURGE VALVOLA DI SPURGO	1/2"-14 NPTF	MAX. 50 Nm
2.6/3.3	SAFETY VALVE SICHERHEITSVENTIL SOUPAPE DE SECURITE VALVOLA DI SICUREZZA	3/8"-18 NPTF	MAX. 30 Nm
3.1; 3.5	EXHAUST FOR COMPRESSED AIR ENTLÜFTUNG FUER DRUCKLUFT ÉCHAPPEMENT POUR AIR COMPRI ME SCARICO PER ARIA COMPRESSA	-	-
4/2.7	CONTROL PORT STEUERANSCHLUSS ORFICE DE COMMANDE ORIFIZIO DI COMANDO	1/8"-27 NPTF	MAX. 25 Nm
6	HEATING HEIZUNG CHAUFFAGE RISCALDAMENTO	-	-


2	STUDS M12X1.75	3
1	AIR DRYER	1
ITEM	DESCRIPTION	QTY

TECHNICAL DATA: / TECHNISCHE DATEN: / CARACTERISTIQUES TECHNIQUES: / CARATTERISTICHE TECNICHE:

HEATING: HEIZUNG: CHAUFFAGE: RISCALDAMENTO:

POWER: LEISTUNG: STROMLOS: WITHOUT CURRENT 95 3 W

APPLIED ACROSS THE HEATER CONTACTS DIREKT AN DEN HEIZUNGSKONTAKTEN APPLIQUEE SUR LES CONTACTS DE CHAUFFAGE APPLICATA SULLE CONTATTI DI RISCALDAMENTO

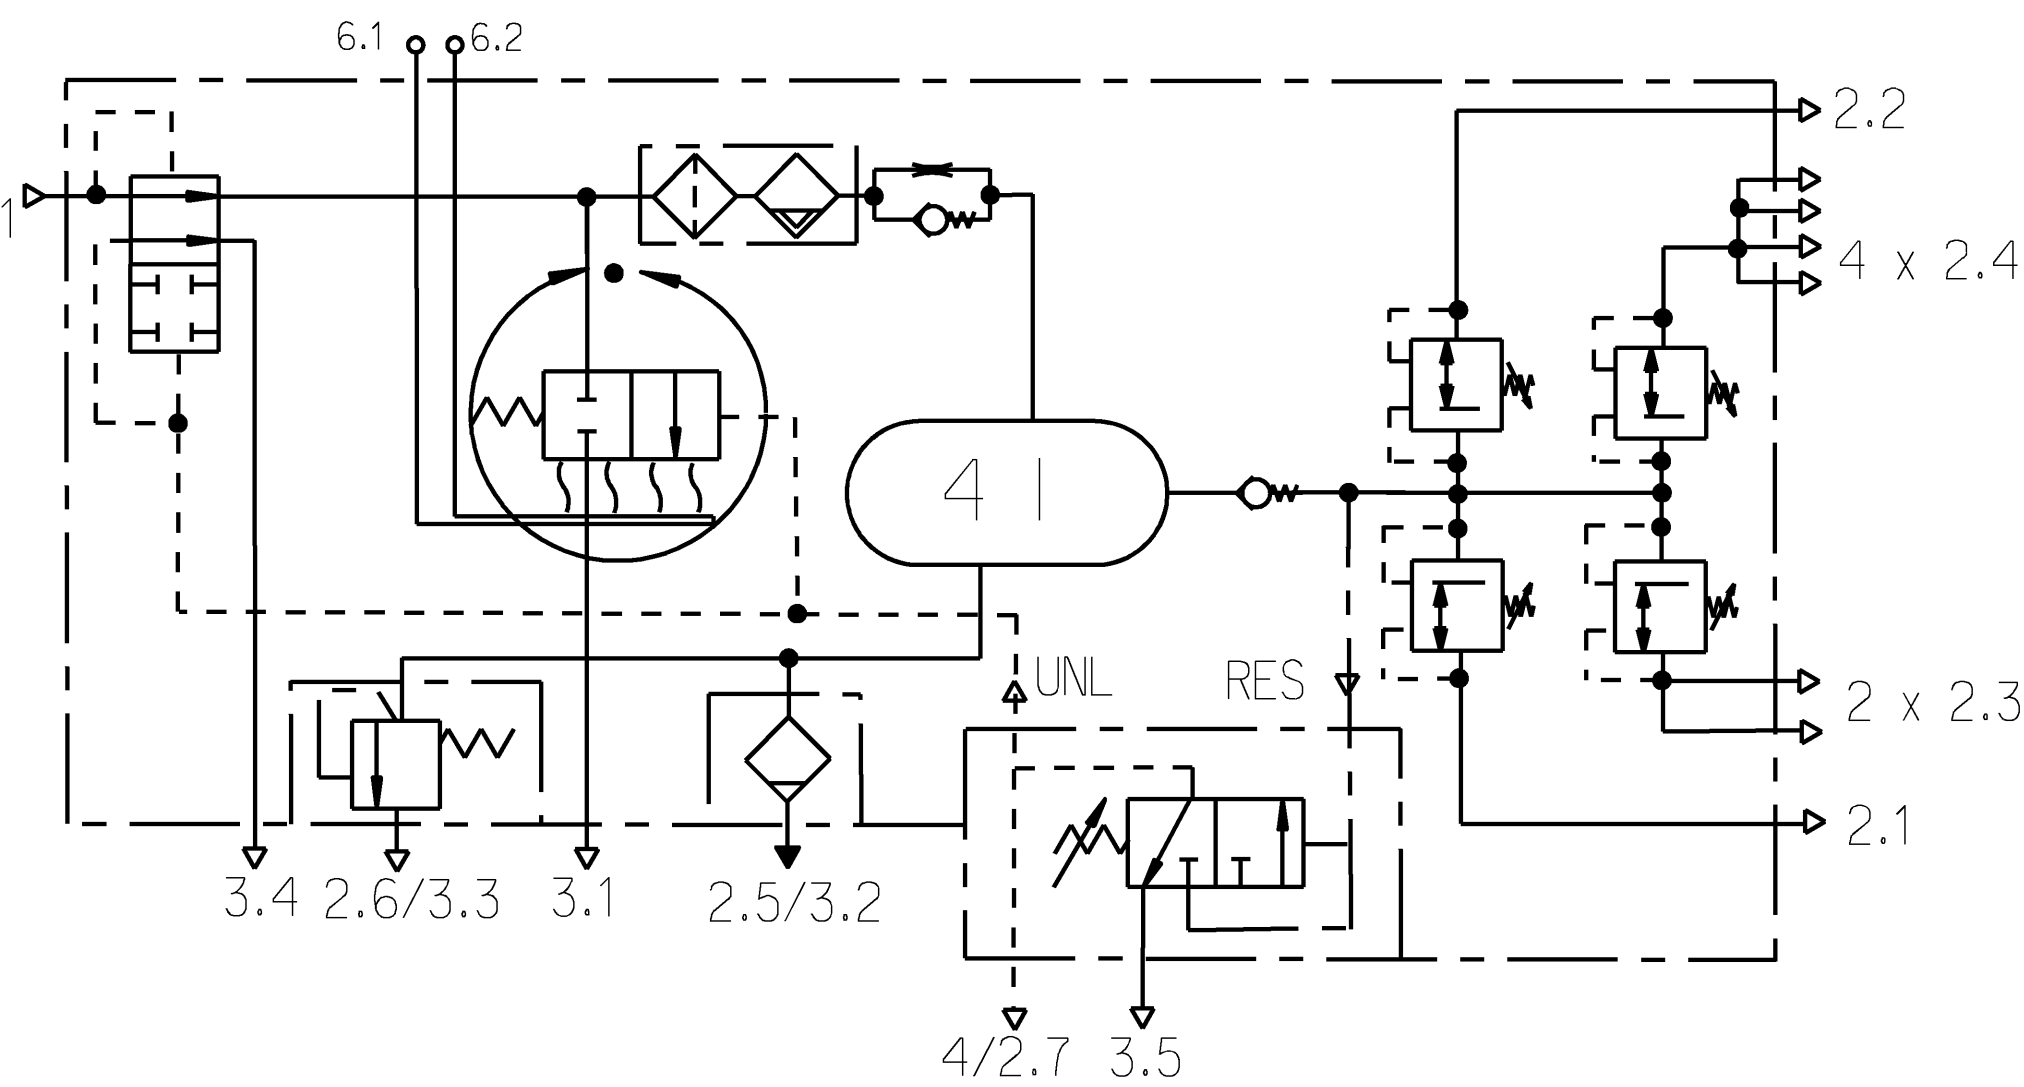

THIRD ANGLE PROJECTION

General Specification: 432-354-1 - Size ISO 19405 LP		Copyright WABCO®		WABCO®	
Further Technical Data:		Date: 2019-05-03		Signature: Expert	
Doc. Code: 432-261		Sheet: 1		To: 2019-05-03	
Range of Nominal Dimensions (± mm)		Material No. 432 475 204 0		Date of first issue: 005	
Fine: 0.5 1.0 1.5 2.0		10.5 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100		ML 1/1	
Medium: 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 11.0 12.0 13.0 14.0 15.0 16.0 17.0 18.0 19.0 20.0 21.0 22.0 23.0 24.0 25.0 26.0 27.0 28.0 29.0 30.0 31.0 32.0 33.0 34.0 35.0 36.0 37.0 38.0 39.0 40.0 41.0 42.0 43.0 44.0 45.0 46.0 47.0 48.0 49.0 50.0 51.0 52.0 53.0 54.0 55.0 56.0 57.0 58.0 59.0 60.0 61.0 62.0 63.0 64.0 65.0 66.0 67.0 68.0 69.0 70.0 71.0 72.0 73.0 74.0 75.0 76.0 77.0 78.0 79.0 80.0 81.0 82.0 83.0 84.0 85.0 86.0 87.0 88.0 89.0 90.0 91.0 92.0 93.0 94.0 95.0 96.0 97.0 98.0 99.0 100.0		ECO No. 500818		Revision: 3	
Coarse: 2.0 3.5 5.0 6.5		Size: A 0		Tech. Resp. 3001-JAW	
Tapped Holes acc.:		Tolerance Class: Applied: Overlapped:		Replacement for:	