



PART CODE	MATERIAL	SURFACE PROTECTION
I	ALUMINIUM ALLOY	CHROMATED
II	STEEL	PASSIVATED
III	STEEL	VARNISH
IV	BRASS	SILVER COATED
V	STEEL	PHOSPHATED

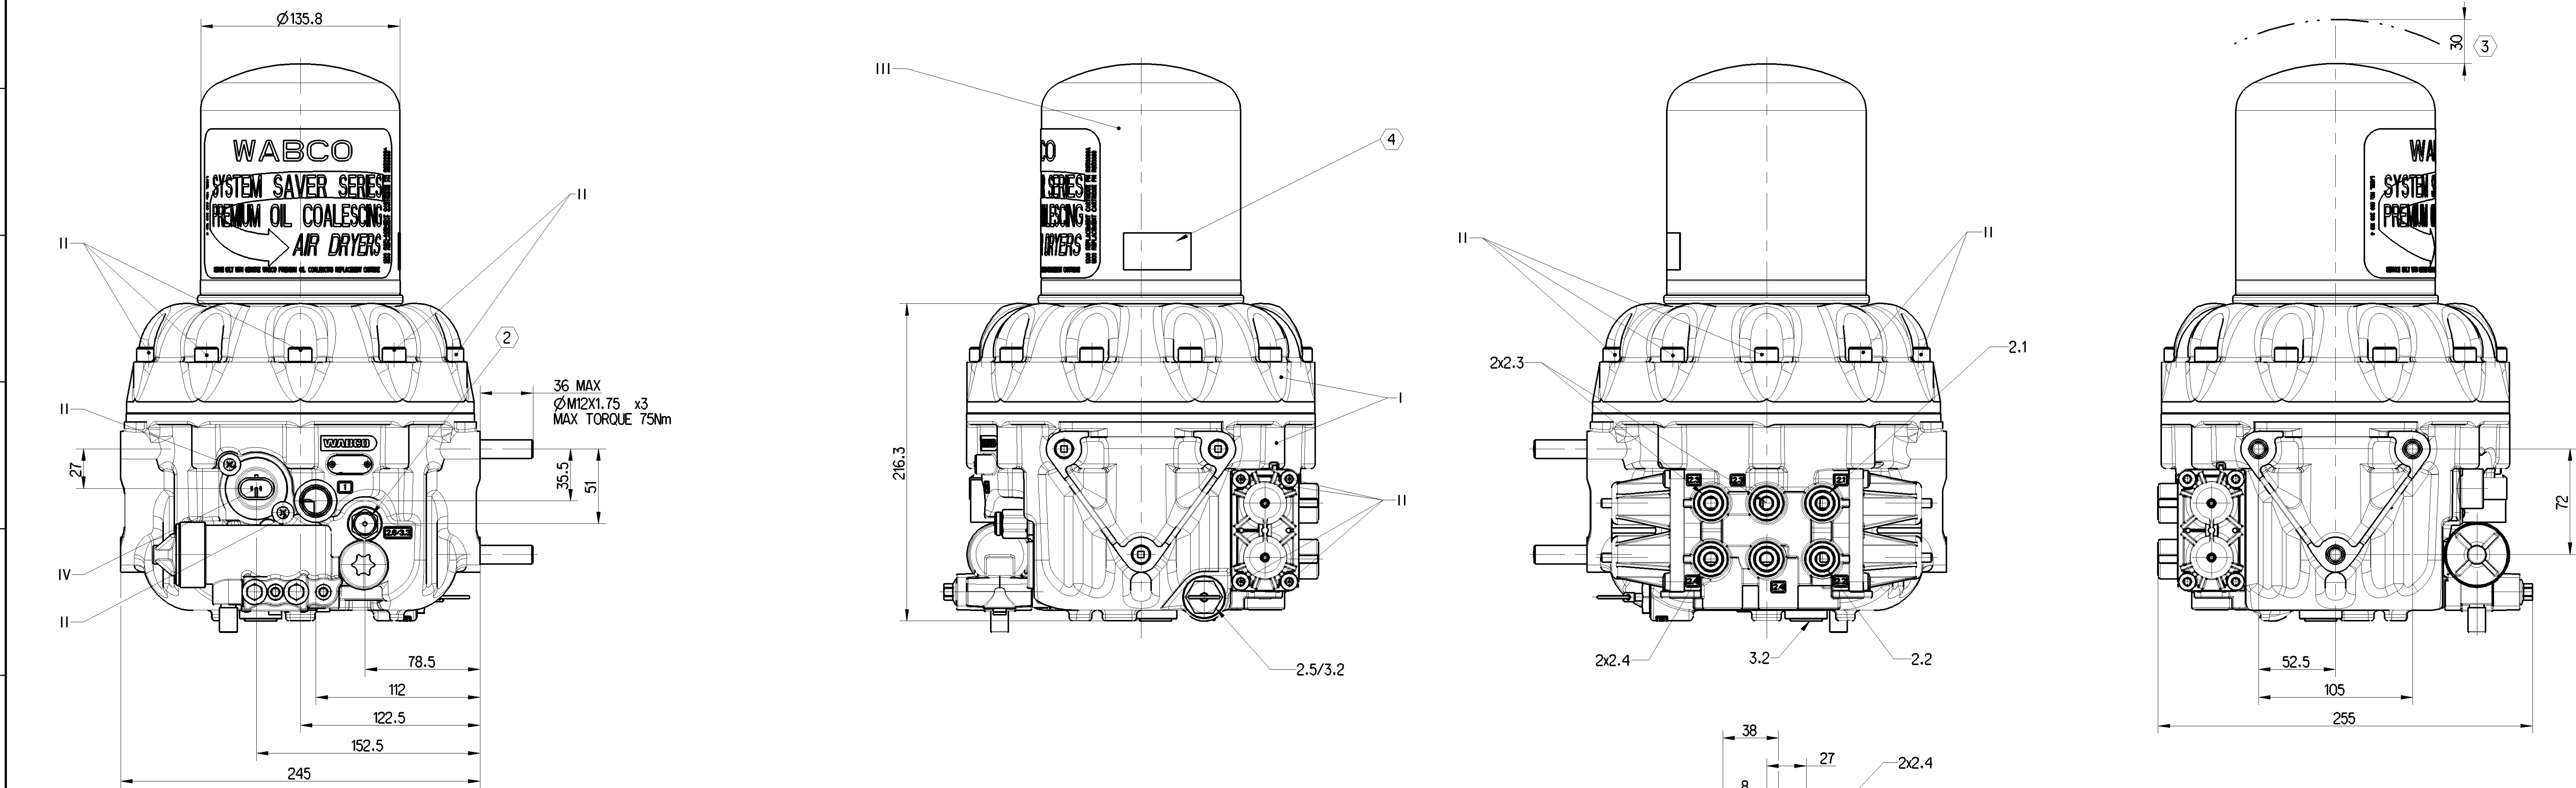


PORT ANSCHLUSS ORIFIZIO	FUNCTION FUNCTION FUNZIONE	THREAD GEWINDE FILETTATURA	TORQUE FOR CONNECTIONS: ANZUSMMOMENT FUER EINSCHRAUBSTUTZEN; COUPLE DE SERRAGE DES RACCORDS; COPPIA DI SERRAGGIO DEI RACCORDI;
1	SUPPLY ENERGIEZULUSS ALIMENTATION ALIMENTAZIONE	1/2"-14 NPTF	MAX. 50 Nm
2.1	SERVICE BRAKE BETRIEBSBREMS FREINAGE FRENATURA	3/8"-18 NPTF	MAX. 30 Nm
2.2	SERVICE BRAKE BETRIEBSBREMS FREINAGE FRENATURA	3/8"-18 NPTF	MAX. 30 Nm
2 x 2.3	TRAILER BRAKING SYSTEM ANHÄNGER BREMSANLAGE SYSTEME DE FREINAGE DE LA REMORQUE FRENATURA DEL RIMORCHIO	3/8"-18 NPTF	MAX. 30 Nm
4 x 2.4	AUXILIARY DEVICE NEBENVERBRAUCHER SERVITUDES SERVIZI AUSILIARI	3/8"-18 NPTF	MAX. 30 Nm
2.5/3.2	DRAIN VALVE ENTWÄSSERUNGSVENTIL VALVE DE PURGE VALVOLA DI SGURGO	1/2"-14 NPTF	MAX. 50 Nm
2.6/3.3	SAFETY VALVE SICHERHEITSVENTIL SOUPAPE DE SECURITE VALVOLA DI SICUREZZA	3/8"-18 NPTF	MAX. 30 Nm
3.1; 3.5	EXHAUST FOR COMPRESSED AIR ENTLUEFTUNG FUER DRUCKLUFT ÉCHAPPEMENT POUR AIR COMPRIME SCARICO PER ARIA COMPRESSA	-	-
4/2.7	CONTROL PORT STEUERANSCHLUSS ORIFICE DE COMMANDE ORIFIZIO DI COMANDO	1/8"-27 NPTF	MAX. 25 Nm
6	HEATING HEIZUNG CHAUFFAGE RISCALDAMENTO	-	-

TECHNICAL DATA: / TECHNISCHE DATEN: / CARACTERISTIQUES TECHNIQUES: / CARATTERISTICHE TECNICHE:			
THERMAL RANGE OF APPLICATION: TERMISCHER ANWENDUNGSBEREICH: GAMME D'APPLICATION THERMIQUE: CAMPO DI APPLICAZIONE TERMICA:		Continuous application: -40° ... +149°F (-40° ... +65°C) max. 10% of vehicle run-time up to +80°C (reduced drying performance)	
MEDIUM: MEDIUM: FLUIDE: FLUIDO:		COMPRESSED AIR DRUCKLUFT AIR COMPRIME ARIA COMPRESSA	
WORKING PRESSURE: BETRIEBSDRUCK: PRESSION DE SERVICE: PRESSIONE D'ESERCIZIO:		145 psi Max (10 bar)	
SAFETY VALVE OPENING PRESSURE: SICHERHEITSVENTIL OFFENUNGSDRUCK: SOUPAPE DE SECURITE PRESSION D'OUVERTURE: VALVOLA DI SICUREZZA PRESSIONE D'APERTURA:		185 ±15 psi (12.8 ±1 bar)	
OUT OUT PRESSURE ABSCHALTDRUCK PRESSION DE DECL PRESSIONE D'APERT		125-135 psi (8.61-9.30 bar)	
HEATING: HEIZUNG: CHAUFFAGE: RISCALDAMENTO:		OUT-IN PRESSURE EINSCHALTDRUCK PRESSION D'ENLENCHEMENT PRESSIONE DI INNESTO	
BATTERY VOLTAGE: BATTERIESPANNUNG: TENSION DE BATTERIE: TENSIONE DE BATTERIA:		12 3/4 V DC	
POWER: LEISTUNG: POISSANCE: POTENZA:		100 W WITHOUT CURRENT STROMLOS SANS COURANT SENZA CORRENTE	
APPLIED ACROSS THE HEATER CONTACTS DIREKT AN DEN HEIZUNGSKONTAKTEN APPLIQUEE SUR LES CONTACTS DE CHAUFFAGE APPLICATA SULLE CONTATTI DI RISCALDAMENTO		95 3/4 W	

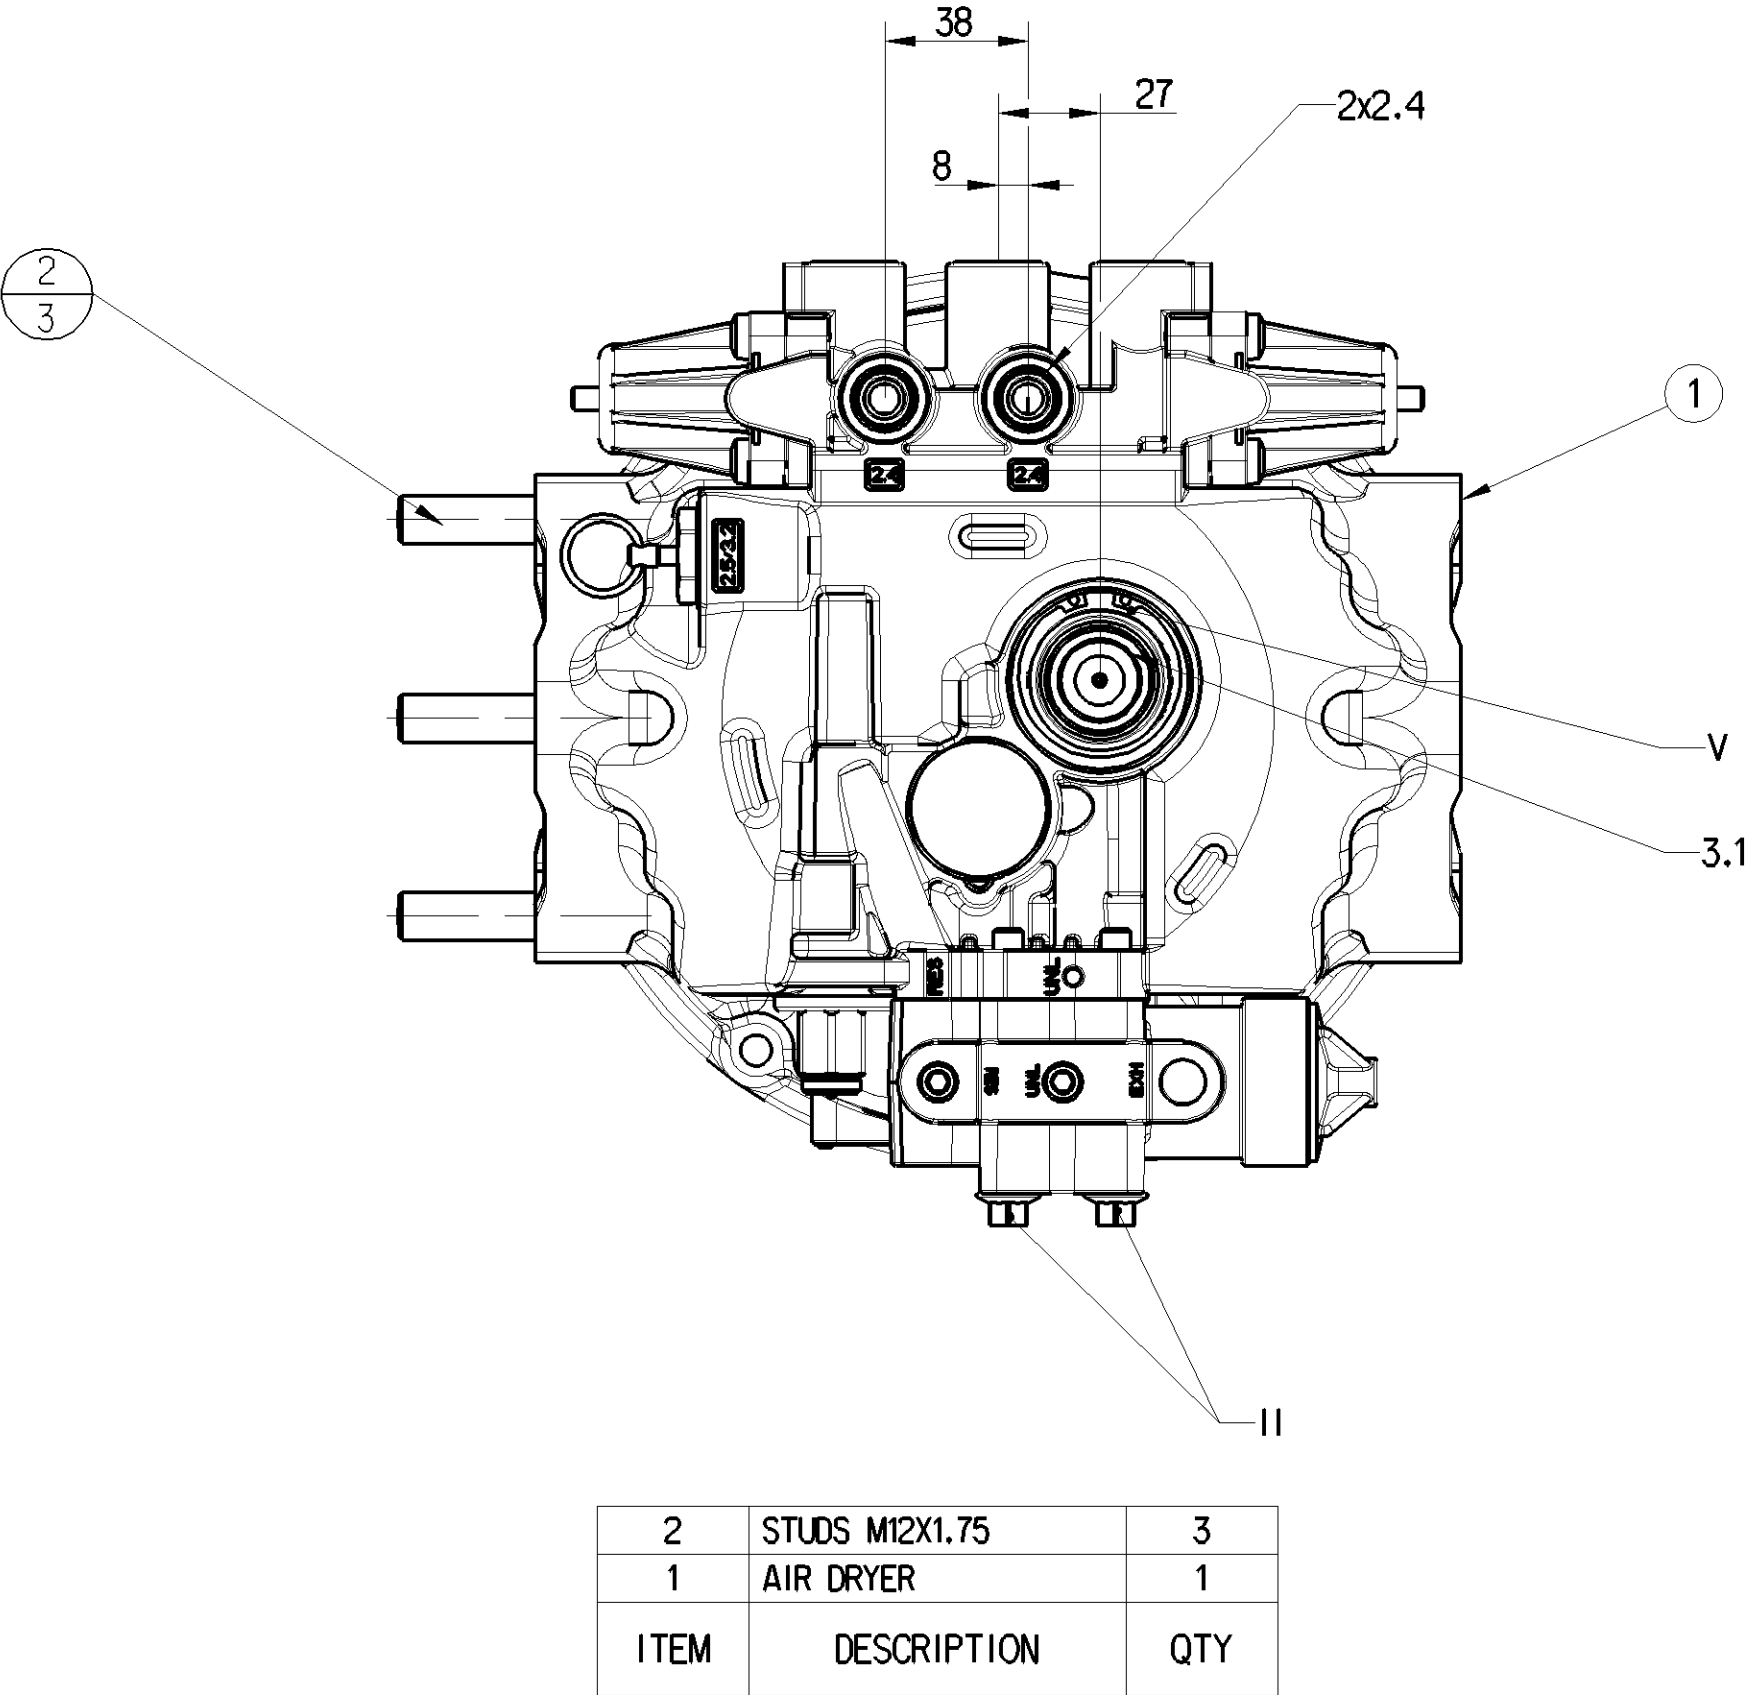

2	STUDS M12X1.75	3
1	AIR DRYER	1
ITEM	DESCRIPTION	QTY

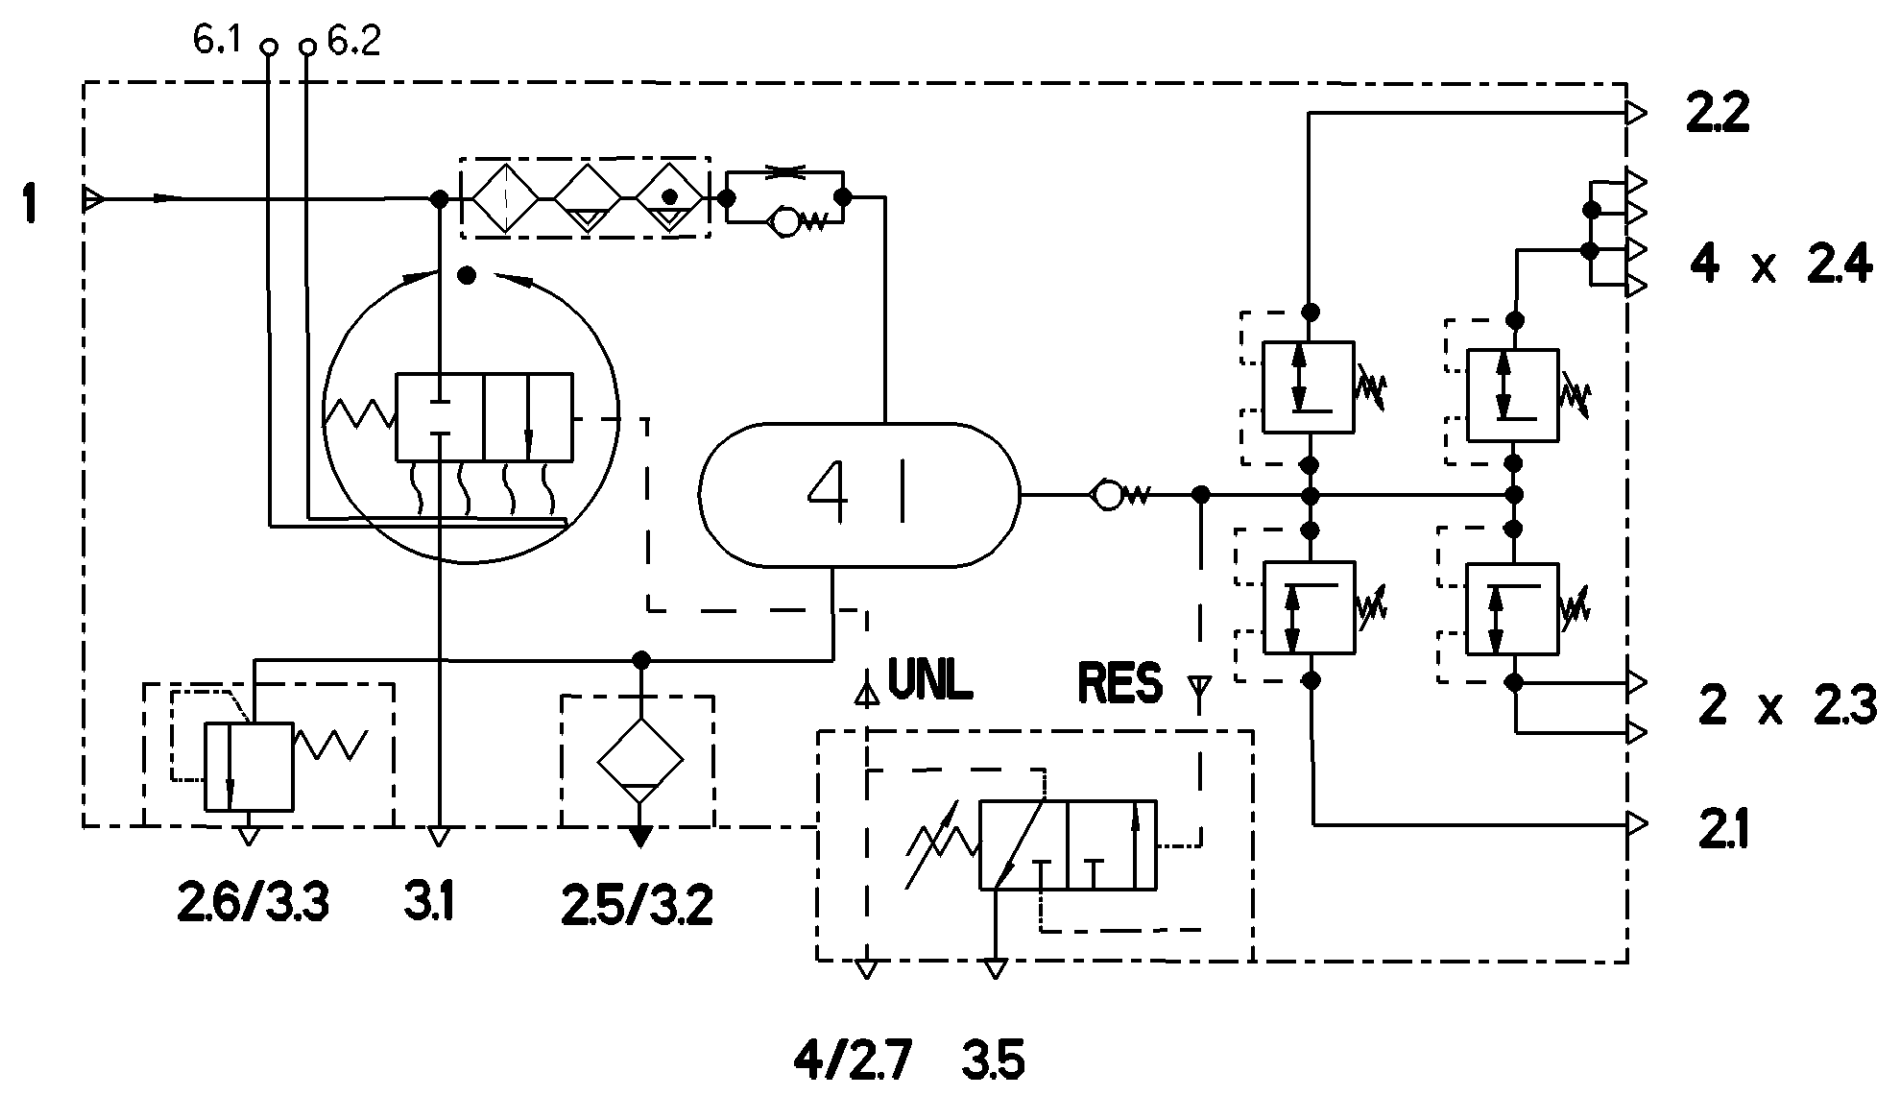

PORTS ORIFICES	ANSCHLUSSE ATTACCHI	2.1	2.2	2 x 2.3	4 x 2.4
OPENING PRESSURE DYNAMIC OEFNUNGSDRUCK DYNAMISCH PRESSION DE OUVERTURE DYNAM PRESSIONE DI APERTURA DINAM	PSI (BAR)	100.0-105.9 (6.9-7.3)	108.8-114.6 (7.5-7.9)	108.8-114.6 (7.5-7.9)	108.8-114.6 (7.5-7.9)
CLOSING PRESSURE STATIC SCHLIESSDRUCK STATISCHE PRESSION DE FERMETURE STATIQUE PRESSIONE DI CHIUSURA STATICO	PSI (BAR)	≥ 72 ≥ (5)			

- NOTE:
① THE COMPRESSOR GOVERNOR CUT OUT PRESSURE SHALL COMPLY WITH PETERBILT SPEC MS-0800-006.
- ② SAFETY VALVE 2.6/3.3
OPENING PRESSURE: 185 ±15 psi (12.8 ±1 bar).
- ③ MOUNTING HEIGHT.
- ④ LABEL INCLUDES THE FOLLOWING INFORMATION:
PART NAME, PART NUMBER, DATE OF PRODUCTION AND BAR CODE.

THIRD ANGLE PROJECTION

General Specification: ISO 8766, JIS B3041, Size ISO 14405 LP		Copyright ©		Z	
Further Technical Data: Product Specification		Date: 2023-08-04		Signature: [Signature]	
Doc. Code: 035		Sheet: 1		To: 15	
General Tolerances: ISO 2011		2023-08-04		Checked: [Signature]	
Range of nominal dimensions in mm		2023-08-04		Kalkowski	
Class		11		10.5	
Tolerance		± 0.05		± 0.05	
Medium		X		± 0.05	
Coarse		± 0.1		± 0.05	
Tapped Holes acc.		A 0		CREO	
Tolerance Class Applied (assumed)		A 0		CREO	
Date of first issue: 2023-08-04		Doc. Code: 035		Language: ML	
Revision: 005		Part: 475		Sheet: 1/1	
Replacement for:		432 475 304 0		5051 AM	