
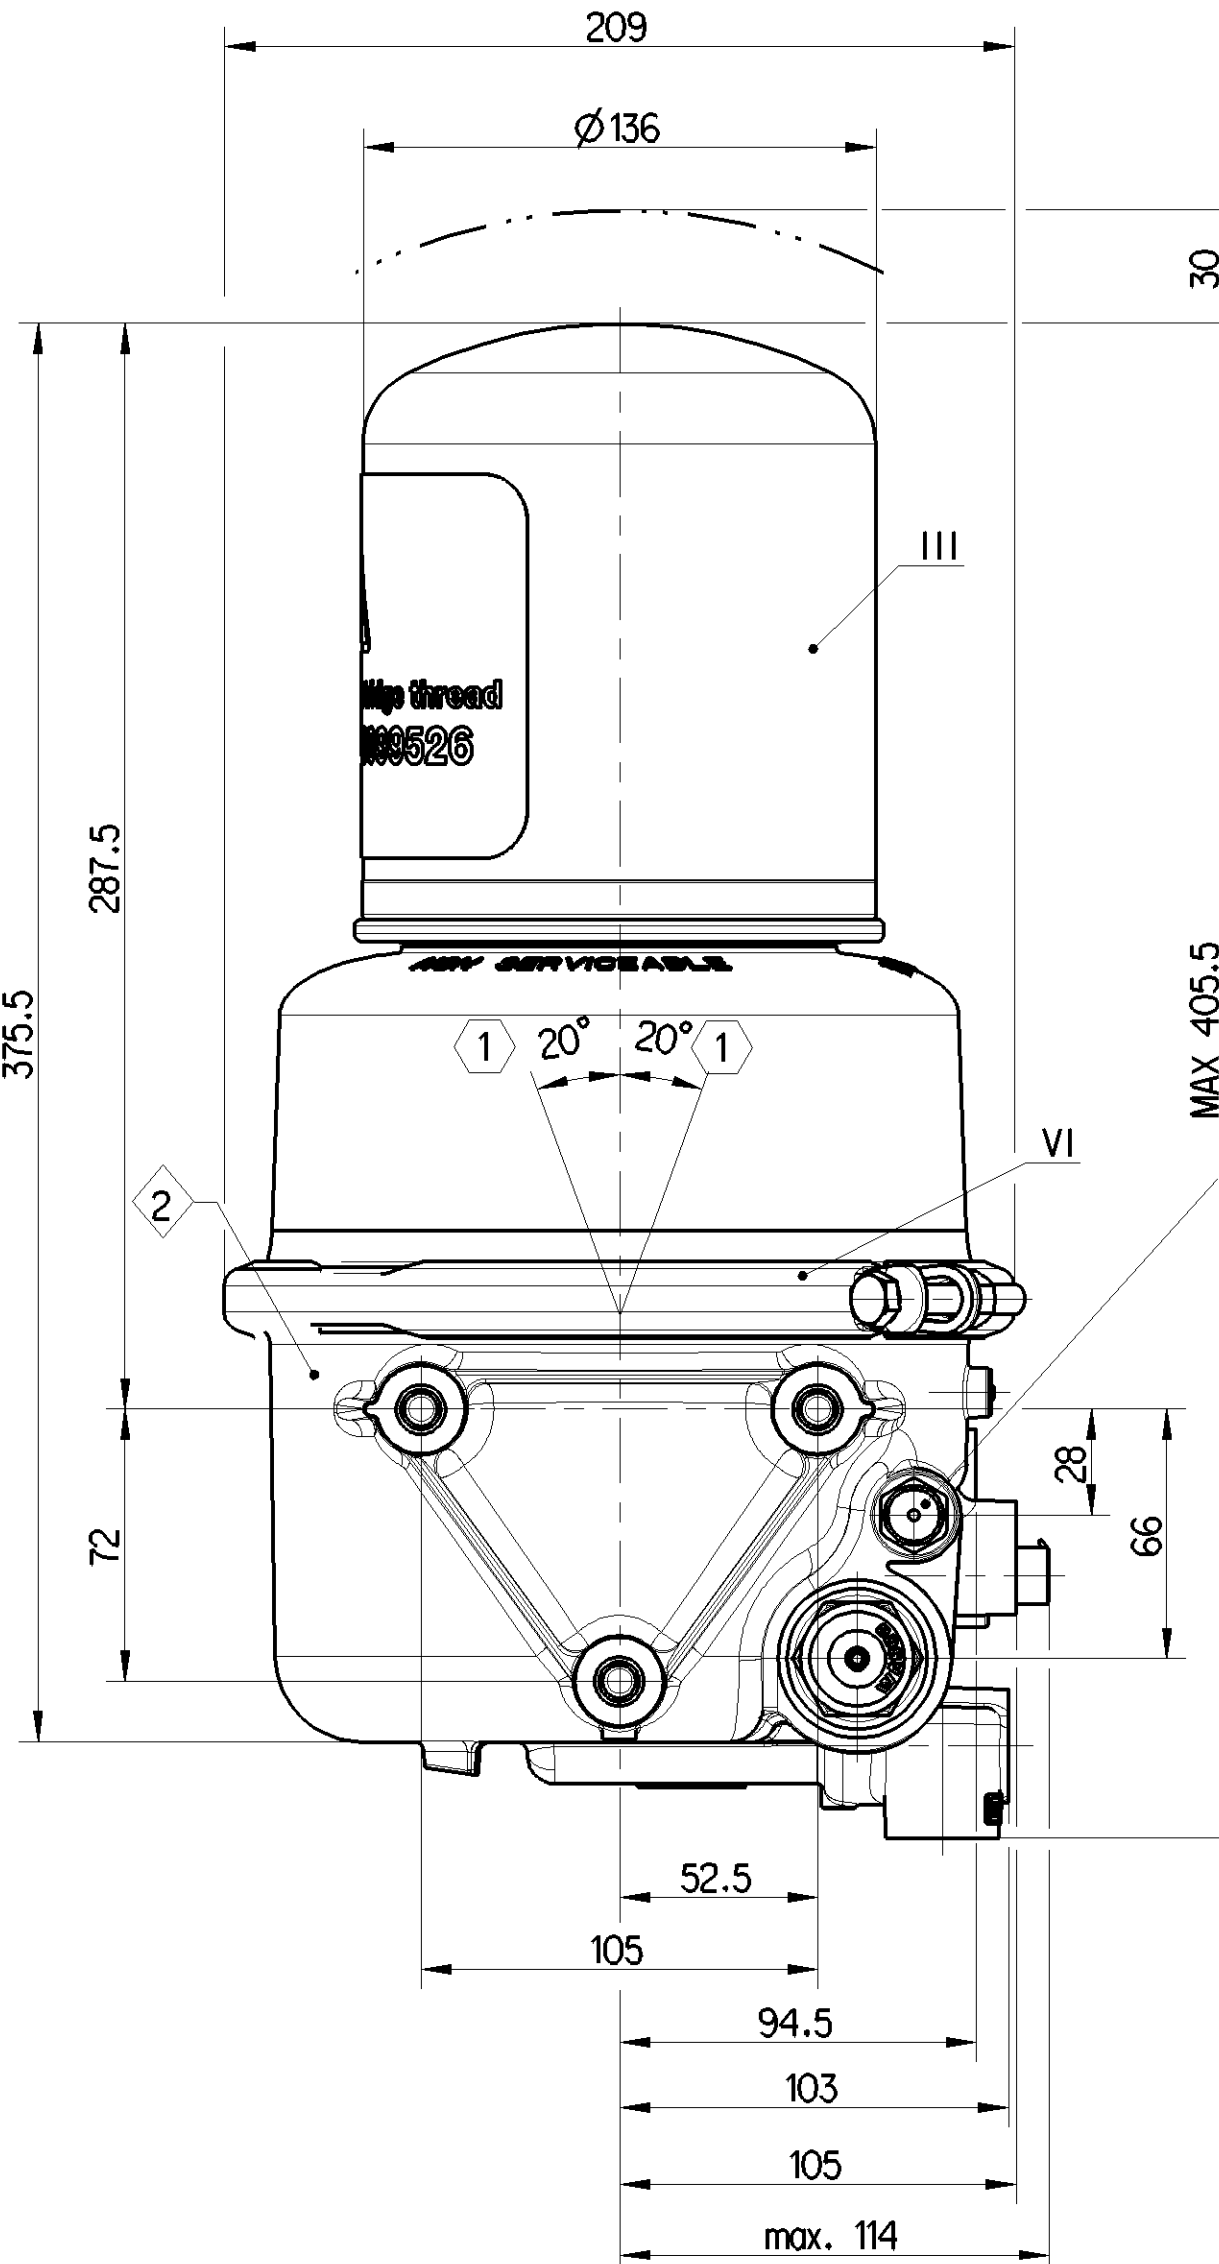
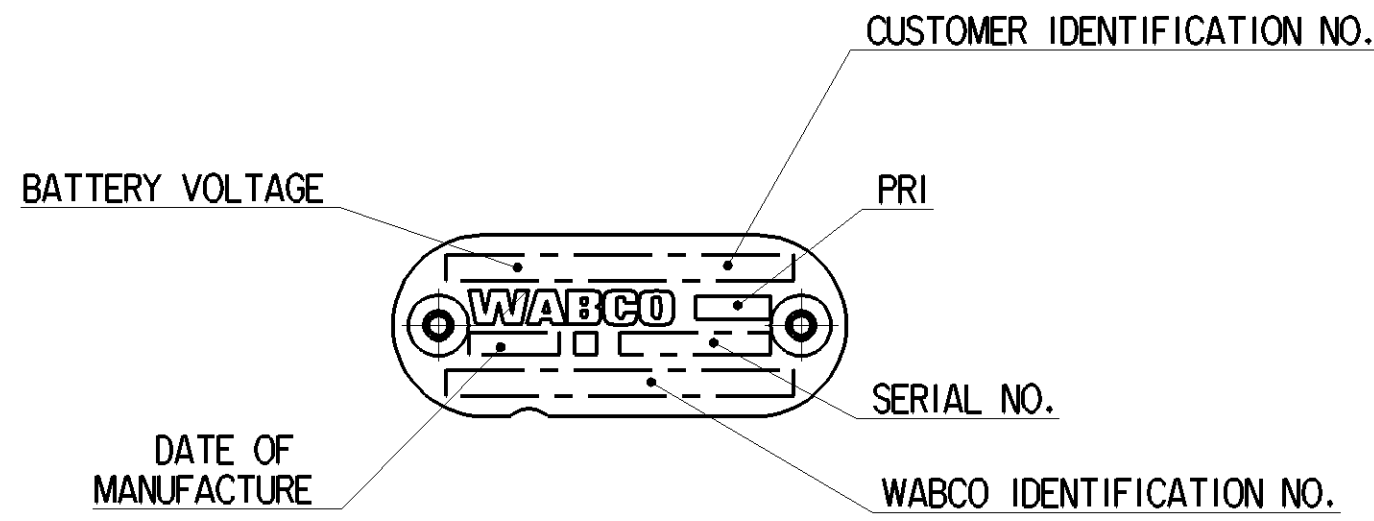
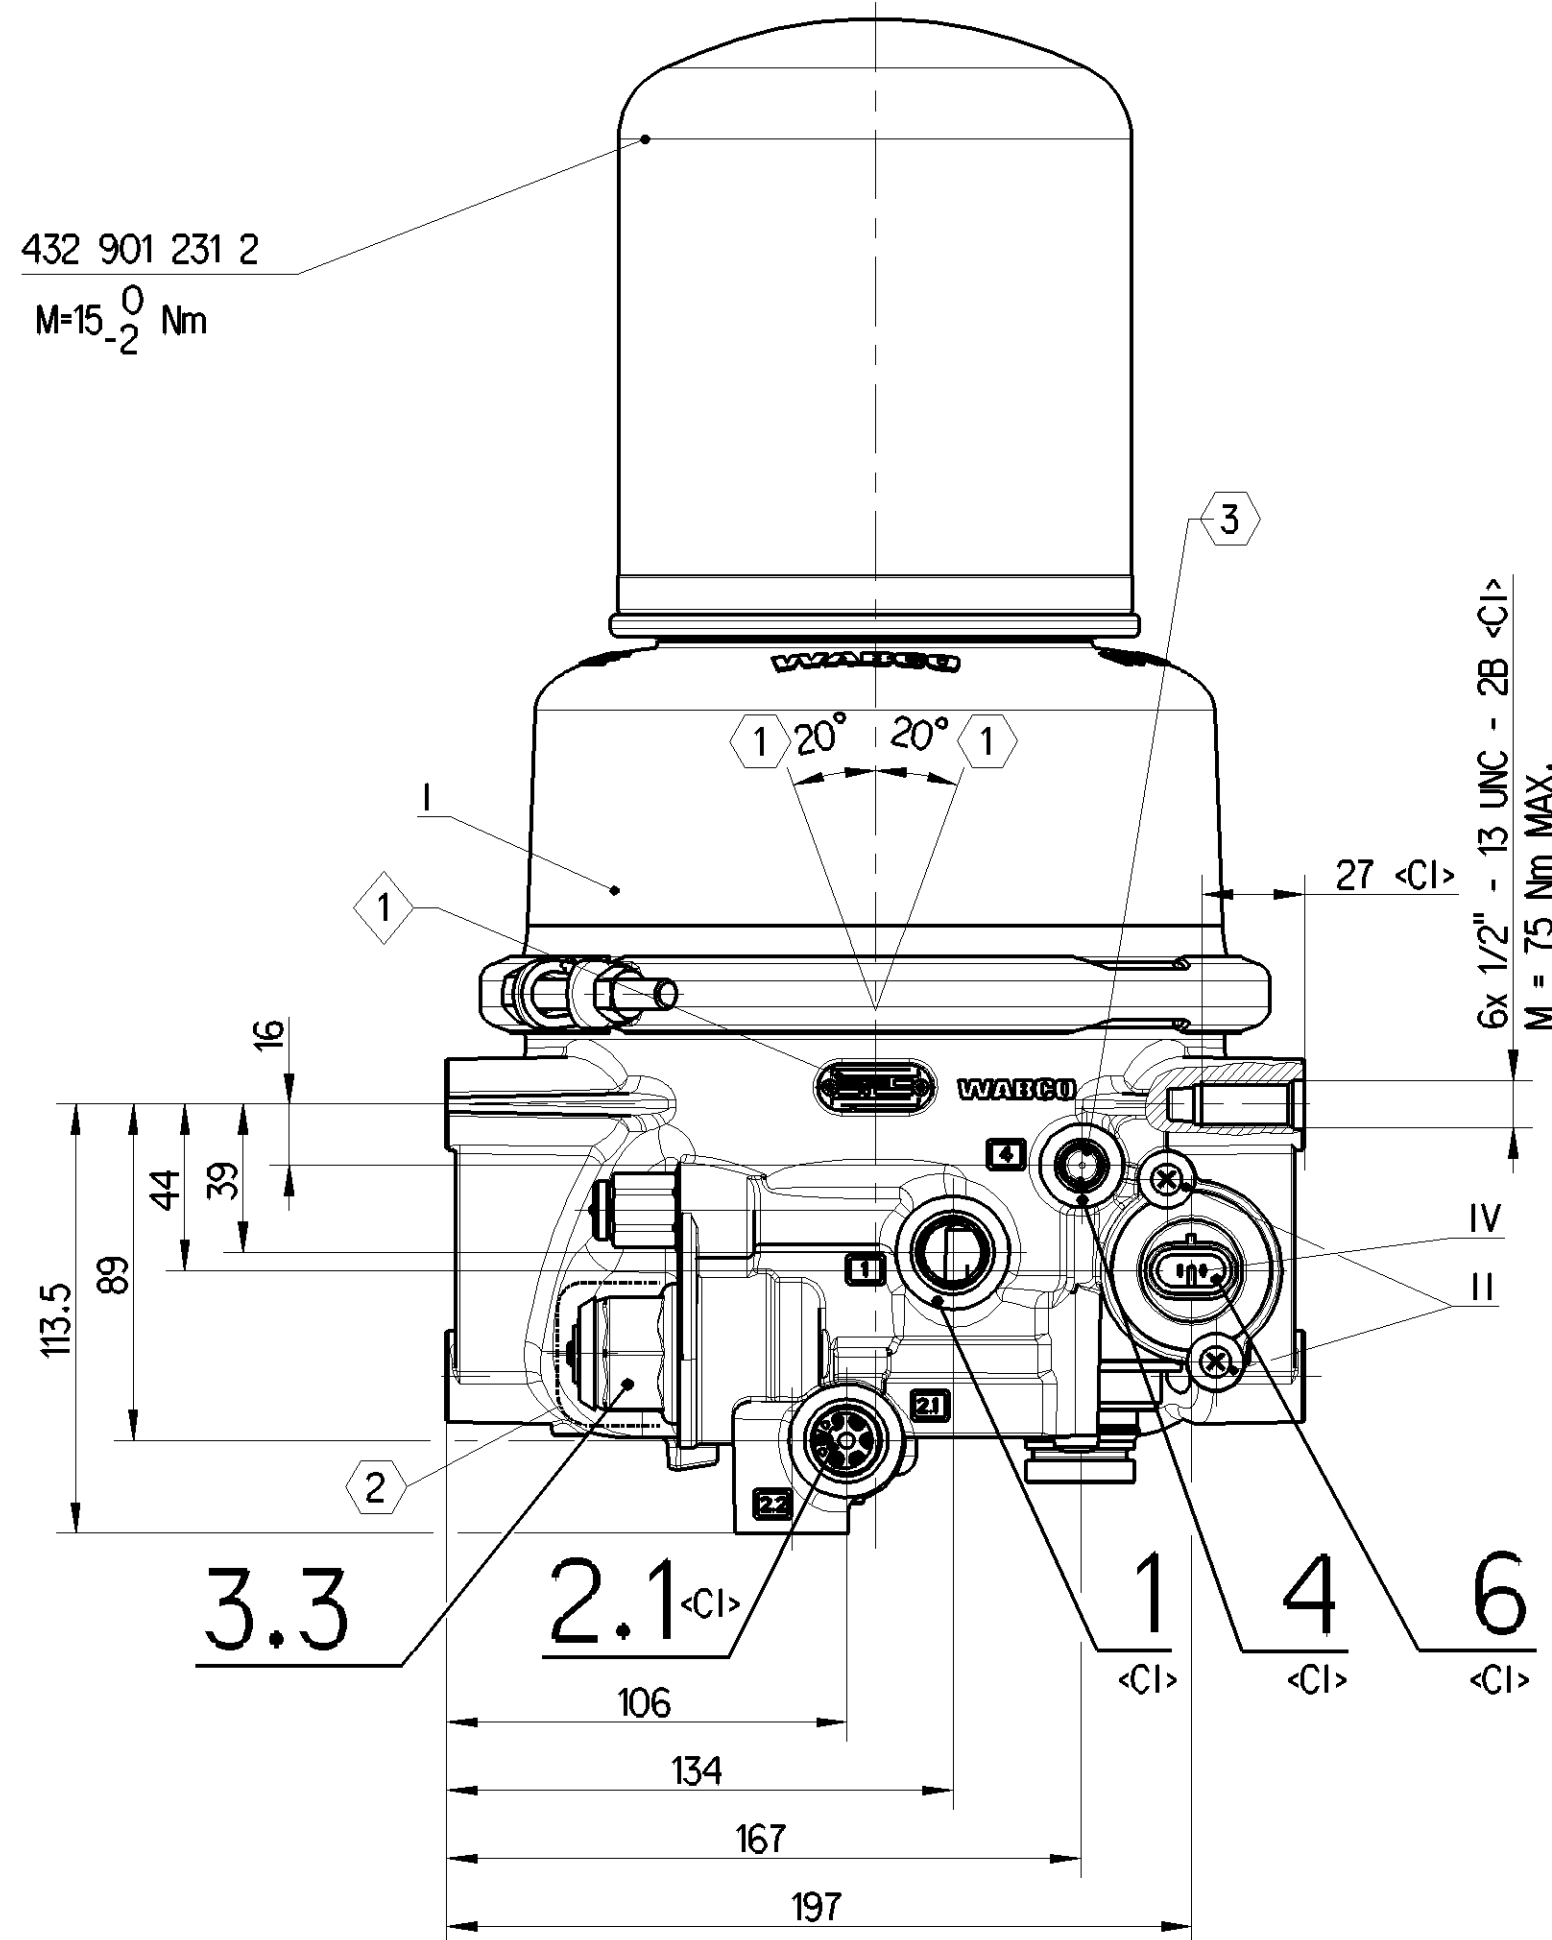



Non è permesso copiare, a fini di riproduzione, questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. Toute réimpression ou communication de son contenu sans autorisation écrite de la WABCO est formellement interdite. Toute réimpression ou communication de son contenu sans autorisation écrite de la WABCO est formellement interdite. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without prior written permission from WABCO. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without prior written permission from WABCO.

SURFACE PROTECTION OBERFLÄCHENSCHUTZ PROTECTION DE SURFACE PROTEZIONE SUPERFICIALE		
I	ALUMINIUM ALLOY	CHROMATED
II	STEEL	PASSIVATED
III	STEEL	VARNISHED
IV	BRASS	SILVER COATED
V	STEEL	PHOSPHATED
VI	STEEL	PAINTED
VII	STEEL	PASSIVATED

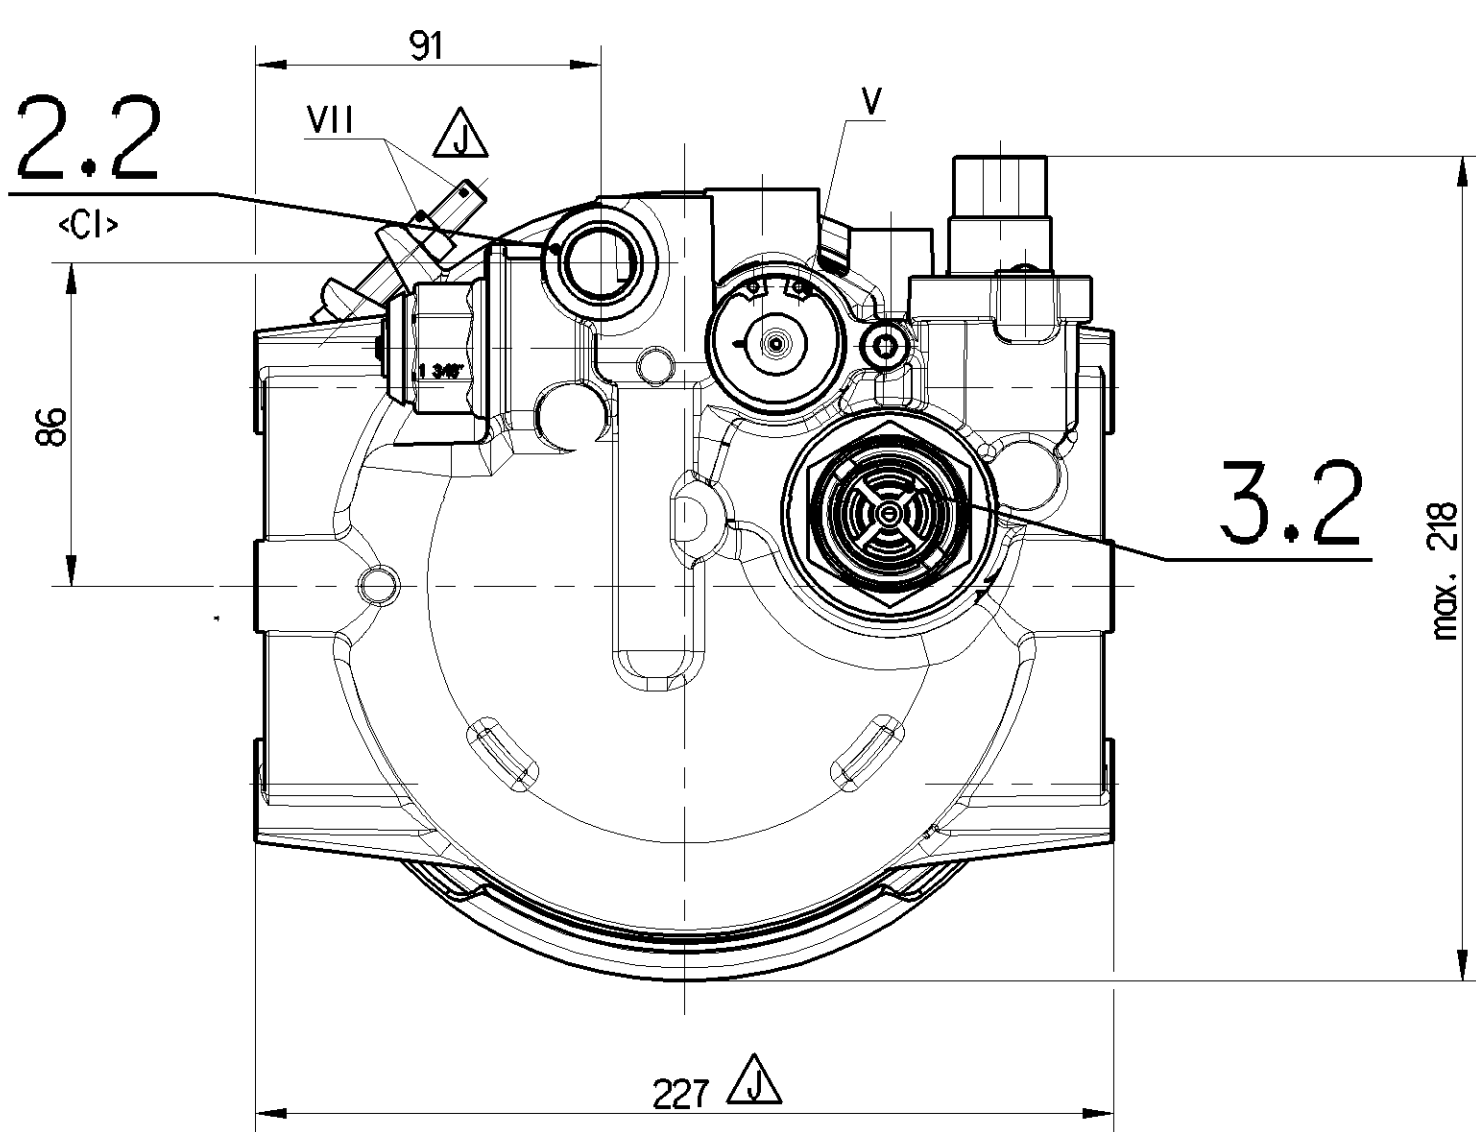

MOUNTING HEIGHT
MONTAGEHOHE
HAUTEUR DE MONTAGE
POSIZIONE DI MONTAGGIO

SAFETY VALVE
SICHERHEITSVENTIL
SOUPAPE DE SECURITE
VALVOLA DI SICUREZZA
3.1
OPENING PRESSURE:
OEFFNUNGSDRUCK:
PRESSION D'OUVERTURE:
PRESSIONE D'APERTURA:
185 ± 15 psi
(12.8 ± 1 bar)

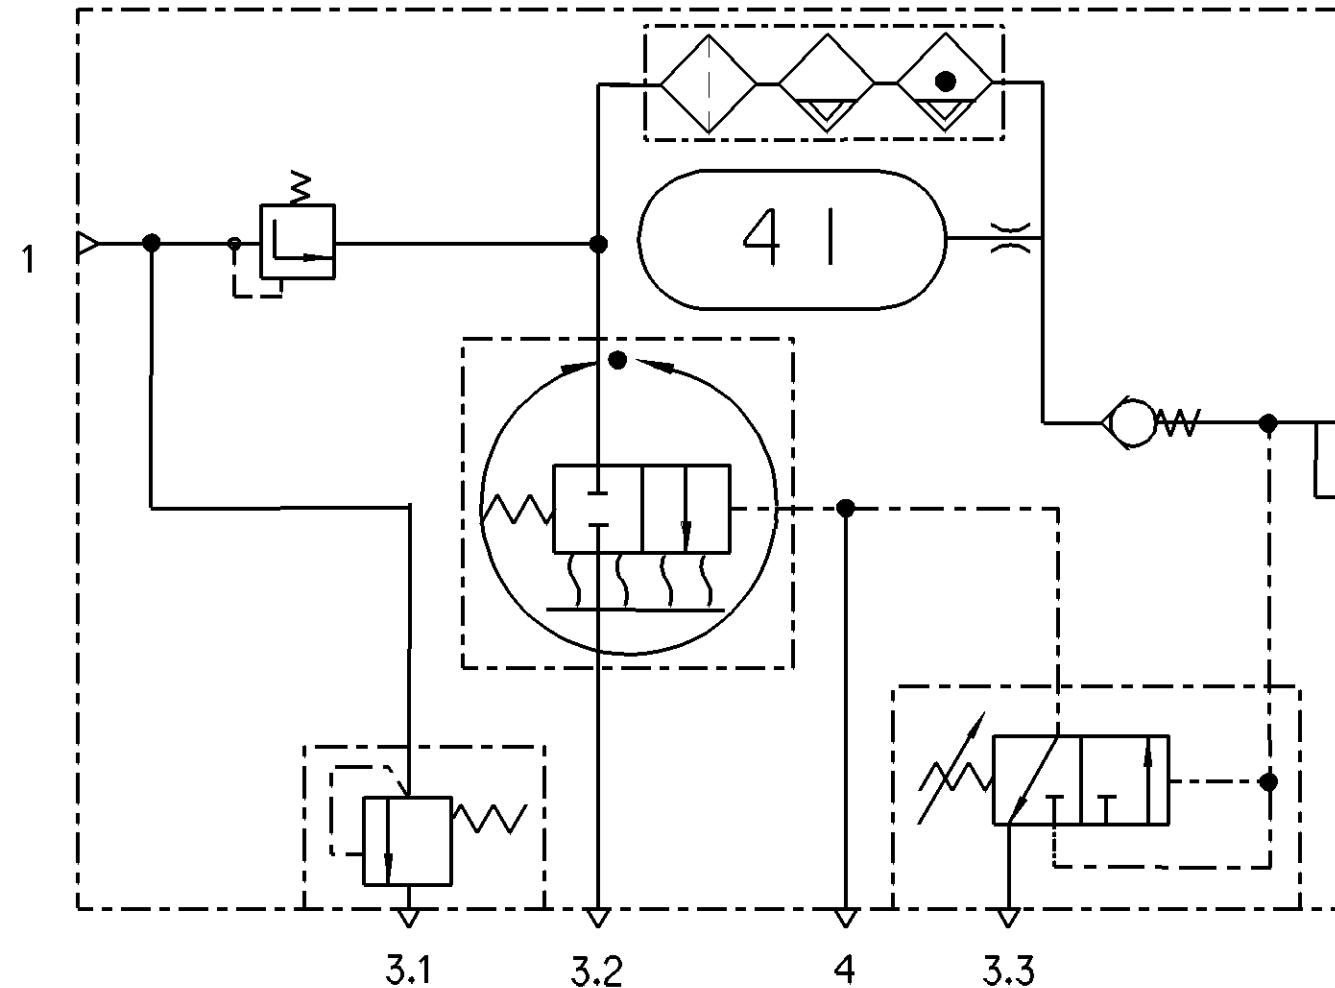

- 1 INSTALLATION POSITION AS DRAWN
EINBAULAGE, WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO
- 2 COVER WHEN PAINTING ON THE VEHICLE
REMOVE COVER AFTER PAINTING
- 3 COMPRESSOR CONTROL SIGNAL [SC]
- 1 MARKED ACCORDING STD 5051.16
- 2 MARKED ACCORDING STD 103-0010
MARKED INSIDE THE PARTS (HIDDEN FROM OUTSIDE)

SPECIAL CHARACTERISTICS STD 105-0007

<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	4
<C1> CUSTOMER INTERFACE	7

TECHNICAL DATA: / TECHNISCHE DATEN: / CARACTERISTIQUES TECHNIQUES: / CARATTERISTICHE TECNICHE:

THERMAL RANGE OF APPLICATION:
TERMISCHER ANWENDUNGSBEREICH:
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

-40° . . . +176°F
(-40° . . . +80°C)

CUT OUT PRESSURE
ABSCHALTDRUCK
PRESSION DE DECL
PRESSIONE D'APERT

<2> 132 ±3 psi [SC]
(9.1 ±0.2 bar)

HEATING:
HEIZUNG:
CHAUFFAGE:
RISCALDAMENTO:

OPERATING RANGE
ARBEITSBEREICH
GAMME DE FONCTIONNEMENT
GAMMA DI FUNZIONAMENTO

<2> 22 ±7 psi [SC]
(1.5 ±0.5 bar)

CUT-IN TEMPERATURE
EINSCHALT TEMPERATUR
TEMPERATURE DE FERMETURE
TEMPERATURA DI CHIUSURA

45° ± 10°F
(7° ± 6°C)

CUT-OFF TEMPERATURE
AUSSCHALT-TEMPERATUR
TEMPERATURE DE MISE
TEMPERATURA DI APERTURA

85° ± 5°F
(29.5° ± 3°C)

WORKING PRESSURE:
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:

145 psi Max
(10 bar)

BATTERY VOLTAGE:
BATTERIESPANNUNG:
TENSION DE BATTERIE:
TENSIONE DE BATTERIA:

12.2 V DC

NOMINAL POWER:
NENNLEISTUNG:
PUISSANCE NOMINALE:
POTENZA NOMINALE:

100 W

POWER WITH 12V DC:
LEISTUNG BEI 12V DC:
PUISSANCE AVEC 12V DC:
POTENZA CON 12V DC:

95 W

TCOV CHECKING - PERMISSIBLE LEAKAGE MEASURED ON PORT 1
DURING OFF-LOAD AT 3±0.2 bar AT ROOM TEMP.

<2> Vn = 1000 dm³/min [SC]

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP				Copyright WABCO®		WABCO	
Further Technical Data: Product Specification				Date		Signature	
Doc. Code: 035		Sheet: 1 To 6		2022-06-21		Kurzynski	
General Tolerances JED-261				2022-06-24		Kosrzewo	
Range of nominal dimensions in mm				238 x 227 x 405		AIR DRYER WITH PURGE TANK LÜFTTROCKNER MIT REINIGUNGSTANK DESSICATEUR AVEC RESERVOIR DE NETTOYAGE ESSICCATORE D'ARIA CON SERBATOIO DI DEPURAZIONE	
Class 1) ≤ 50 > 50 > 180 > 400 > 400				Dimensions in mm			
Fine	±0.5	±1	±1.5	±2	Mass	Material No.	
Medium	X ±1	±2	±3	±4	6.415	1:2	
Coarse	±2	±3.5	±5	±6.5	Size	CAD System	
Tapped Holes acc.				432 480 101 0		Date of first issue: 2016-08-05	
1) Tolerance Class Applied: Crossmarked				A 1		Doc. Code Language Sheet	
				CREO		005 ML 1/1	
						Revision Techn. Resp.	
				EQU/NA 51031		Replacement for	
				2 x J 5057			