


Non e' permesso copiare, o terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Tout Communication ou reproduction de ce document, toute exaltation ou communication de son contenu sans autorisation expresse, sans autorisation expresse. Tout non respect a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modeles.

Wabco e' la proprietaria di tutti i diritti di copyright e di tutti i diritti di brevetto. Wabco e' la proprietaria di tutti i diritti di copyright e di tutti i diritti di brevetto. Wabco e' la proprietaria di tutti i diritti di copyright e di tutti i diritti di brevetto.

Wabco e' la proprietaria di tutti i diritti di copyright e di tutti i diritti di brevetto. Wabco e' la proprietaria di tutti i diritti di copyright e di tutti i diritti di brevetto. Wabco e' la proprietaria di tutti i diritti di copyright e di tutti i diritti di brevetto.

M12x1.5-DEEP 12
TORQUE 55±5 Nm

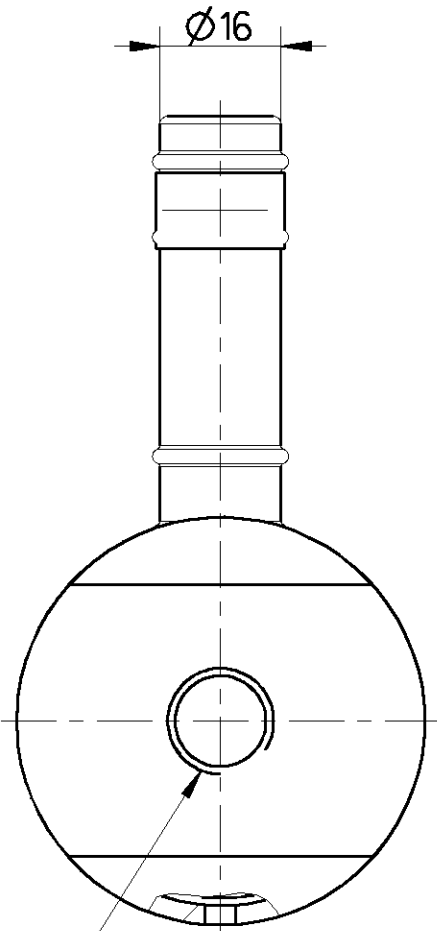

M917400
WORM DRIVE HOSE CLAMP
TORQUE 3.5±0.5 Nm

80
55
45
12.5
MAXIMUM ENGAGEMENT OF
LINK ROD DURING INSTALLATION
MINIMUM ENGAGEMENT OF
LINK ROD DURING INSTALLATION

M925200
LINK

VI

CUSTOMER MATING LINK ROD
SHOWN FOR REFERENCE
RECOMMENDED DIAMETER FOR LINK ROD Ø7.98±0.08
THE LINK ROD AND LINK JOINT SHALL
WITHSTAND A PULL FORCE OF 320 N MINIMUM

Ø7.65±0.15

I

XI

XII

LABEL INDICATING
ASSEMBLY PART No.
SHOWN HERE

ASSY No
WABCO
433 300 004 0

A4004312840/002

36
Ø54

DICV PART NUMBER
TO BE SHOWN HERE

138


60.2

TO BE INSTALLED IN VEHICLE WITH
THIS HOLE FACING DOWNWARDS

OPEN PORT IS FITTED WITH CLOSURE PLUG FOR STORAGE AND TRANSIT PURPOSES.

XVI	CAST IRON	PLATED
XV	STEEL	ZINC IRON PLATED
XIV	CAST IRON	NO TREATMENT
XIII	ZINC ALLOY	ANODISED
XII	PLASTIC	NO TREATMENT
XI	RUBBER	NO TREATMENT
X	STAINLESS STEEL	NO TREATMENT
IX	BRASS	NO TREATMENT
VIII	ZINC ALLOY	CHROMATED
VII	ALUMINIUM ALLOY	ANODISED
VI	ALUMINIUM ALLOY	CHROMATED
V	CAST IRON	PAINTED
IV	STEEL	POWDER COATED
III	STEEL	PAINTED
II	STEEL	PHOSPHATED
I	STEEL	ZINC PLATED
PART CODE	MATERIAL	SURFACE PROTECTION

DEFLECTION (mm)	LOAD (Kg) (APPROX)
1	3 to 7
25 (Min.)	10 to 19

General Specification: JED-334-0					Copyright WABCO®					WABCO									
Further Technical Data: 4333000040					Date		Signature												
Doc. Code: 035			Sheet: 1 To 3		Drawn		2012-06-08			LAKSHMAN			ARM ASSEMBLY						
General Tolerances JED-261					Checked		2012-06-08		JIFRI										
Range of Nominal Dimensions (± mm)					Expert		LINGSWARAMURTHY												
Class 1)	≤ 50	> 50	≤ 180	> 180	≤ 400	> 400	±3°	Mass	Scale	Material No.					Date of first issue: 2012-06-08				
Fine		0.5	1.0	1.5	2.0	0.504 KG		1:1	433 300 004 0					Doc.Code	Language	Sheet			
Medium	X	1.0	2.0	3.0	4.0	Size		CAD System						ECN-No.	Revision	Techn. Resp.	005	EN	1/1
Coarse		2.0	3.5	5.0	6.5	A 2		Pro/E		-	-	5290_WIN							
Tapped Holes acc. JED-152															Replacement for				
1) Tolerance Class Applied Crossmarked																			