

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.



Werkzeuge sowie Veranschaulichung dieser Unterlagen, Vervielfältigung und Mitnahme hierin ist nicht gestattet, soweit nicht ausdrücklich zugestimmt. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

Non è permesso cedere, o terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Copying of this document and giving it to others and the use or communication of the contents thereof are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

V	RUBBER	NO TREATMENT
IV	CAST IRON	PAINTED
III	STEEL	
II	STEEL	PHOSPHATED
I	STEEL	ZINC PLATED
PART CODE	MATERIAL	SURFACE PROTECTION

3

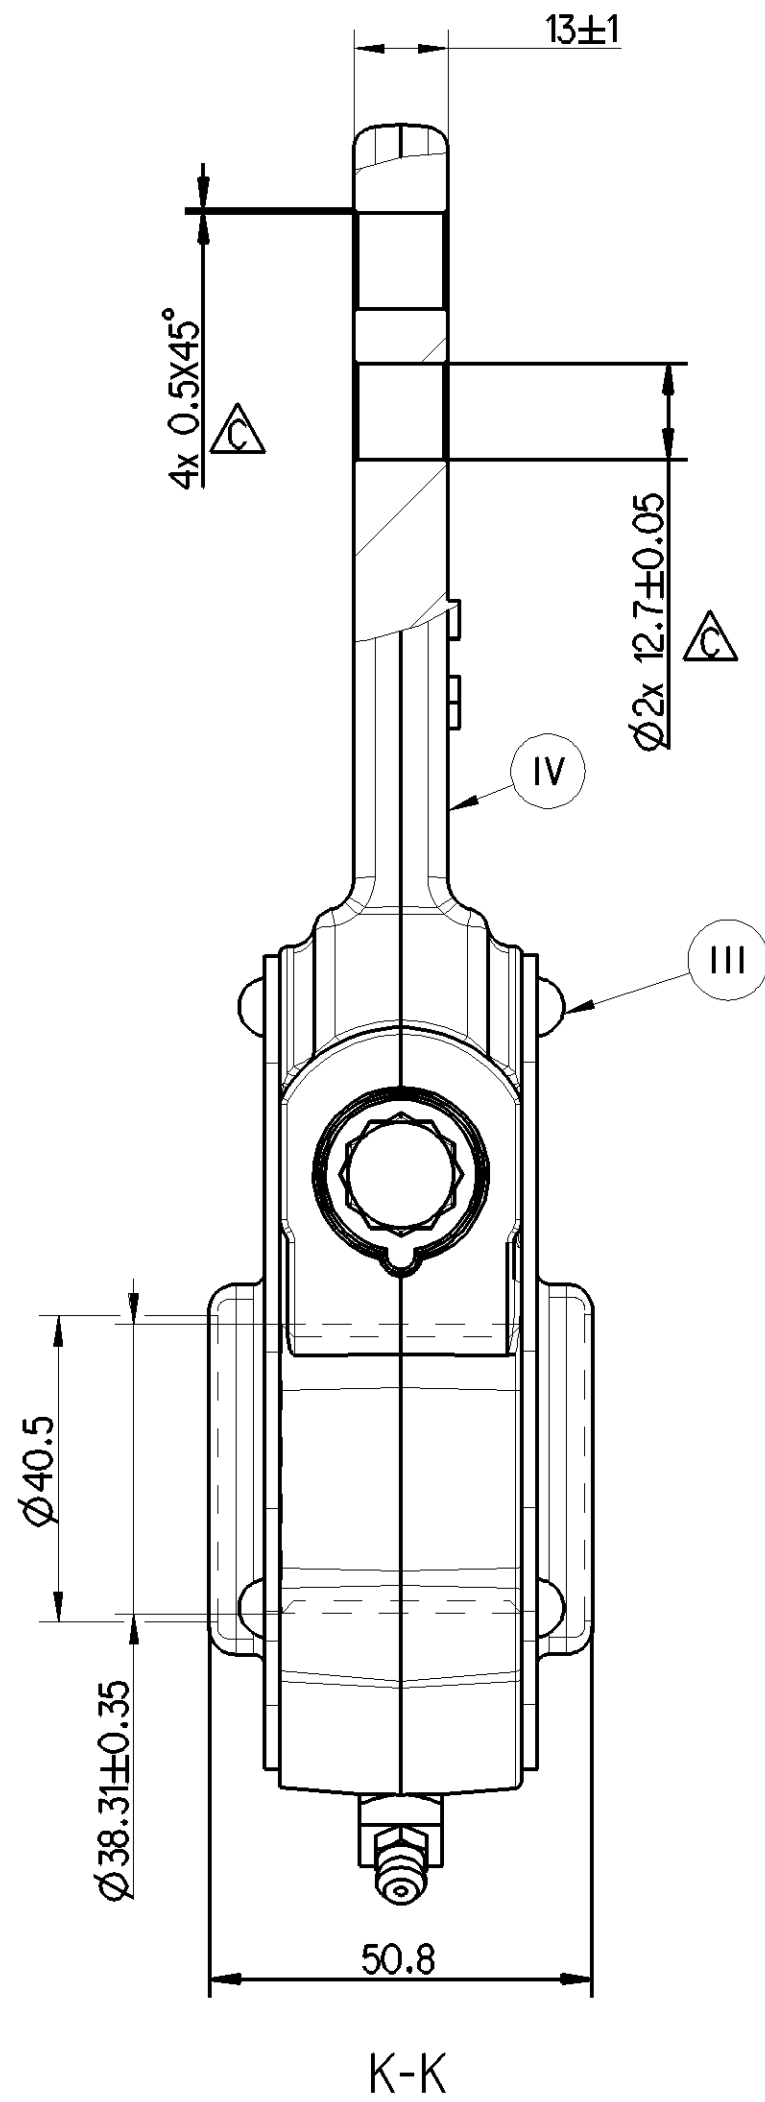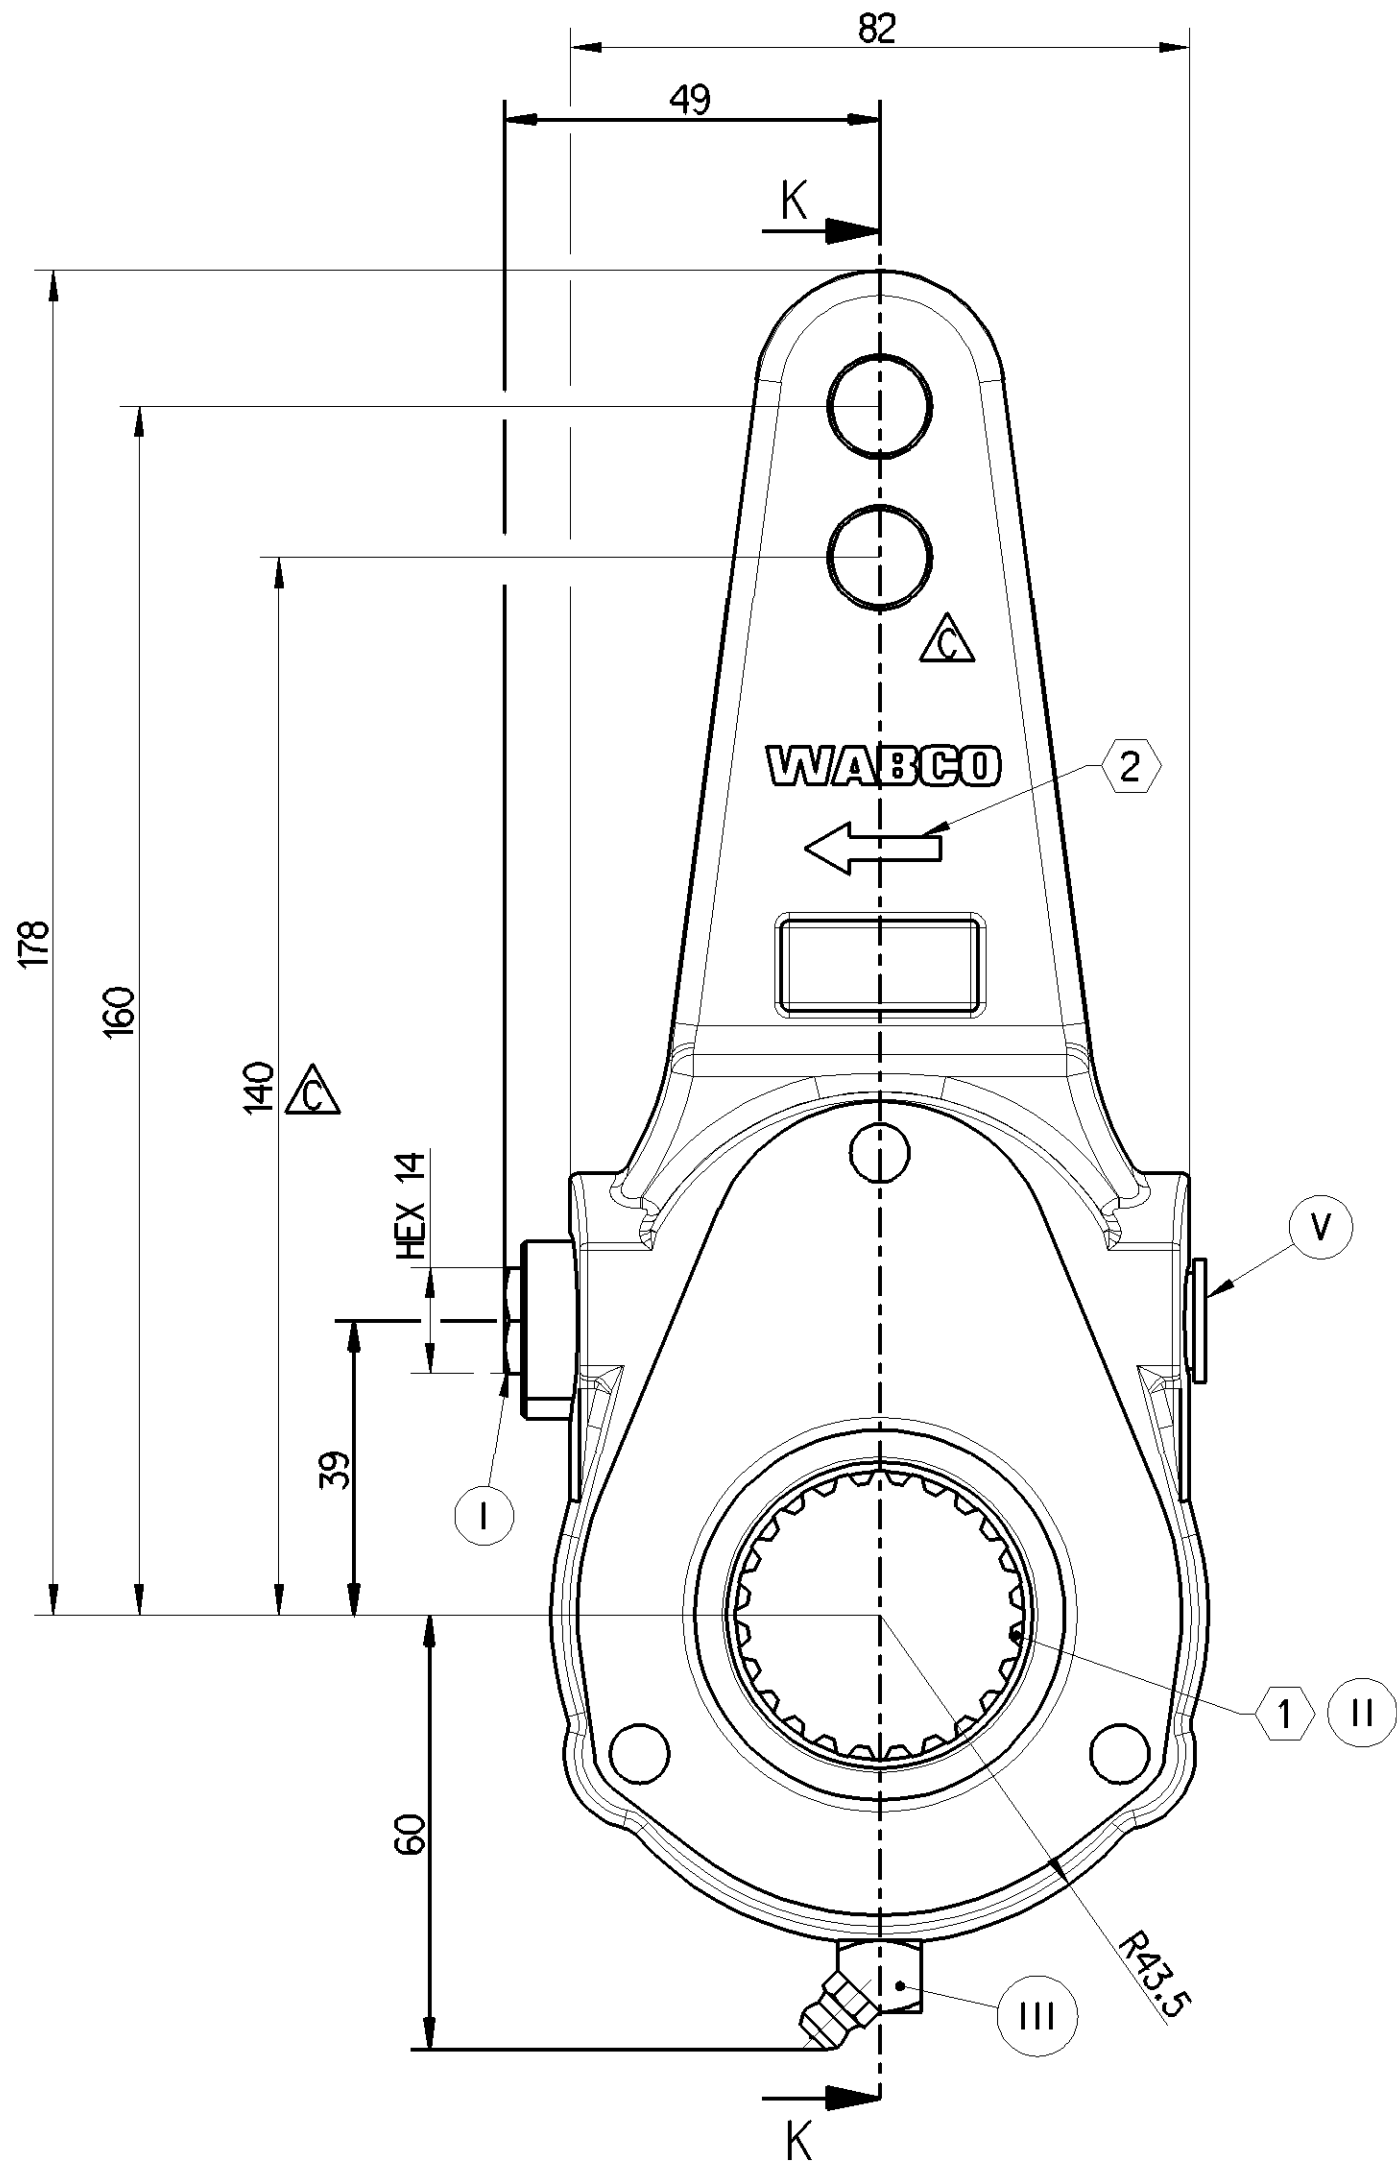

K-K

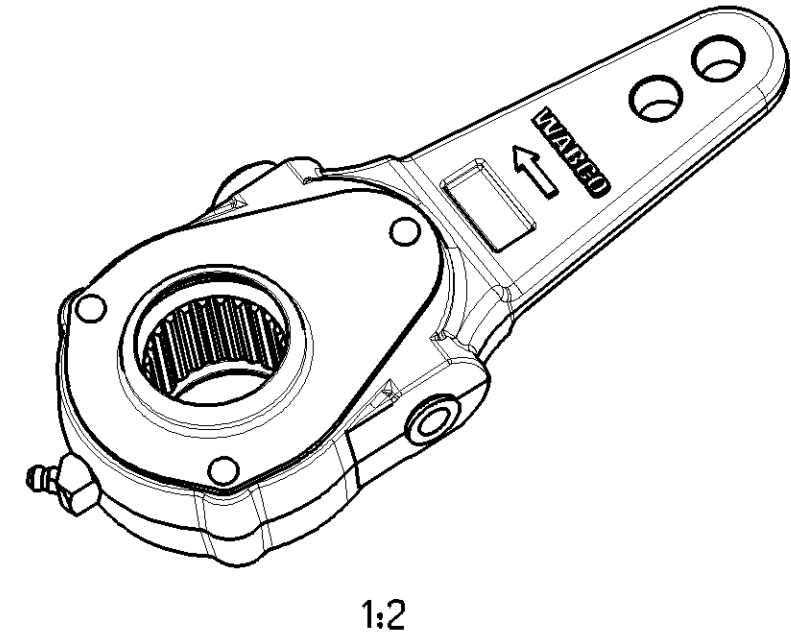

1:2

- 1 SPLINE DETAILS: 38X1.5X24 TEETHX9H DIN 5480
- 2 THIS UNIT IS TO BE INSTALLED SUCH THAT THE DIRECTION OF ACTUATING FORCE IS ALWAYS AS INDICATED BY THE ARROW
- 3 PAINTED WITH STEEL GREY (COLOUR NUMBER 698 ACCORDING TO IS: 5 -1978)

NORMAL RATED TORQUE: 2000 Nm

MAXIMUM TORQUE: 2750 Nm

TO MEET 144 HOURS SALT SPRAY LIFE WHEN TESTED AS PER ASTM B117

ADEQUATE QUANTITY OF MP2 GREASE IS PACKED BETWEEN WORM AND WORM GEAR DURING ASSEMBLY

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP				Copyright ZF®		 SLACK ADJUSTER		
Further Technical Data:				Date	Signature			
Doc. Code:		Sheet:	To	2023-11-07	Moorlth A			
General Tolerances JED-261				Checked	Subbich			
Range of nominal dimensions in mm				Dimensions in mm			Material No.	
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°	Mass	Scale
Fine		±0.5	±1	±1.5	±2		2.192 kg	1:1
Medium	X	±1	±2	±3	±4			
Coarse		±2	±3.5	±5	±6.5		Size	CAD System
Tapped Holes acc.				A 2	CREO		ECN-No.	Revision
1) Tolerance Class Applied Crossmarked							515210	4 C
							Techn. Resp.	5450
							Replacement for	
							-	