


ID	Dimensions
A	4 SCREWS - TORQUE 290-320 Nm DRY
B	RELIEF VALVE CAP TIGHTENING TORQUE 34-47.5Nm DRY
C	ADJUSTING SCREW - TORQUE 43-51Nm DRY
D	8 SCREWS - TORQUE 280-345 Nm DRY
E	P-INPUT M16x1.5
F	R-OUTPUT M18x1.5
G	AUXILIARY PORT - TORQUE 68-82Nm

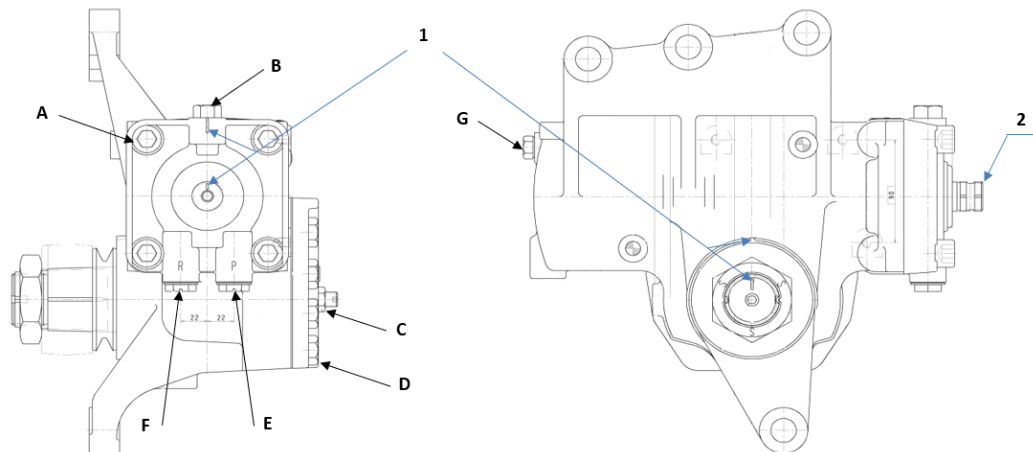

Max pressure:	150 ± 10 bar
Number of revolutions:	4.92
Flow:	16 l/min

Supplier reference:
JRB5004.WC (Rev. A – PS/18/08/2022)

<1>	Safety characteristics	0
<2>	Significant characteristics	0
<CI>	Customer Interface	0

ID	Remark
1	POSITION OF SIGNS FOR DRIVING STRAIGHT
2	1x79 PARALLEL GROOVES
3	INPUT SHAFT ROTATION MUST NOT EXCEED 31° (1.6 INPUT SHAFT REVOLUTIONS) FROM THE CENTER POSITION DEFINED BY THE VALVE AND COMBAL ALIGNMENT MARKS
4	THIS ASSEMBLY MATCHES : BY FUNCTIONAL TEST 31 881 036 DEPARTMENT 1 PAINTING ACCORDING TO SPECIFICATION (RS01) EMBOSSING ACCORDING TO (RS58)

General specification: JED 331-D, Size 150 14x25 E, JED 702		Rough Part No.	
-		-	
Treatment	Surface Protection		Material
-	Black wet painting or zinc passivation		Iron
Copyright WABCO®			
Date	Signature		
10.05.2023	D. Žuberek		
21.05.2023	M. Mucha		
Expert			
M. Mucha			
Material No.		Date of first issue:	
440 005 004 R		005 EN 1/1	
Mass	Scale	Doc. Code	
40 KG	N/A	514092	
Size	CAD System	Revision	Techn. Resp.
A 4	CREO	A	7103_RM
ECN No.		Replacement for	
514092		-	