



Disclaimer: The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of a patent, utility model or design.

ID	Dimensions
A	RELIEF VALVE CAP TIGHTENING TORQUE 34-47.5Nm DRY
B	2 SCREWS - TORQUE 60-70 Nm DRY
C	4 SCREWS - TORQUE 210-225 Nm DRY
D	R-OUTPUT M18x1.5
E	P-INPUT M16x1.5
F	8 SCREWS - TORQUE 280-300 Nm DRY
G	ADJUSTING SCREW - TORQUE 43-51Nm DRY
H	AUXILIARY PORT - TORQUE 68-82Nm

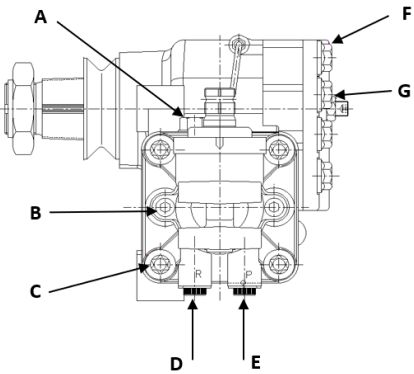

Max pressure:	175 ± 5 bar
Number of revolutions:	5.9
Flow:	16 l/min

Supplier reference:
JRB5013.WC (Rev. A – PS/08/08/2022)

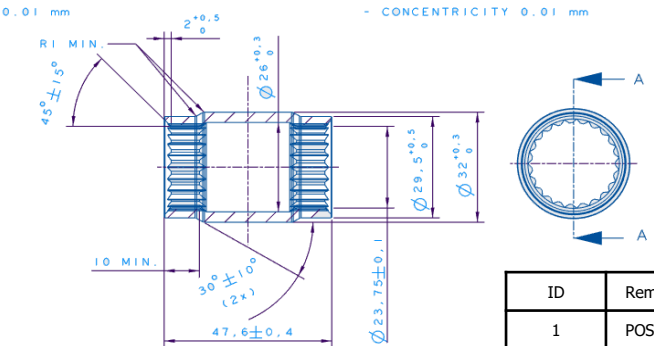

<1>	Safety characteristics	0
<2>	Significant characteristics	0
<CI>	Customer Interface	0

ID	Remark
1	POSITION OF SIGNS FOR DRIVING STRAIGHT
2	1x79 PARALLEL GROOVES
3	INPUT SHAFT ROTATION MUST NOT EXCEED 24° (1.4 INPUT SHAFT REVOLUTIONS) FROM THE CENTER POSITION DEFINED BY THE VALVE AND COMBAL ALIGNMENT MARKS
4	THIS ASSEMBLY MATCHES : BY FUNCTIONAL TEST 31 881 036 DEPARTMENT 1 PAINTING ACCORDING TO SPECIFICATION (RS01) EMBOSSING ACCORDING TO (RS58)

General specification: JRB 5013-D, Size 150 14405 E, JRB 702		Rough Part No.	
Treatment: Surface Protection		Material	
Black wet painting or zinc passivation		Iron	
Copyright WABCO®		WABCO REMAN Steering gear	
Date	Signature		
10.05.2023	D. Žuberek		
12.05.2023	M. Mucha		
M. Mucha Expert			
Mass	Scale	Material No.	Date of first issue:
45 KG	N/A	440 005 013 R	Doc. Code Language Sheet
		005 EN 1/1	
Size	CAD System	ECN No.	Revision
A 4	CREO	514092	A
		Techn. Resp.	Replacement for
		7103_RM	-