
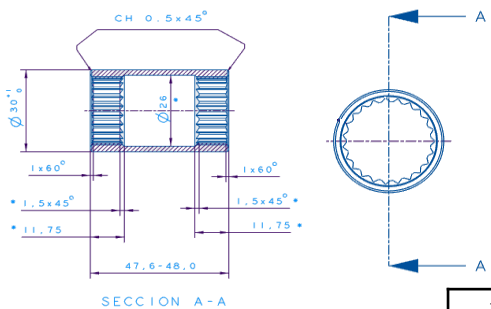
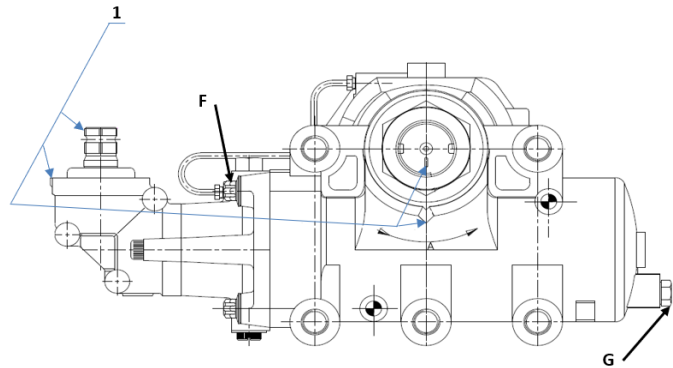


Disclaimer: The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of a patent, utility model or design.

ID	Dimensions
A	ADJUSTING SCREW - TORQUE 43-51Nm DRY
B	8 SCREWS - TORQUE 280-300 Nm DRY
C	RELIEF VALVE CAP TIGHTENING TORQUE 34-47.5Nm DRY
D	R-OUTPUT M18x1.5
E	P-INPUT M16x1.5
F	4 SCREWS - TORQUE 210-225 Nm DRY
G	AUXILIARY PORT - TORQUE 68-82Nm

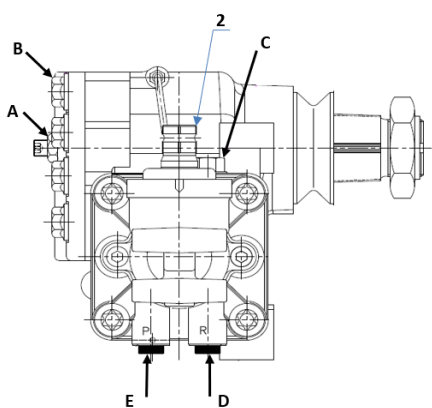

<1>	Safety characteristics	0
<2>	Significant characteristics	0
<CI>	Customer Interface	0

ID	Remark
1	POSITION OF SIGNS FOR DRIVING STRAIGHT
2	1x79 PARALLEL GROOVES
3	INPUT SHAFT ROTATION MUST NOT EXCEED 24° (1.4 INPUT SHAFT REVOLUTIONS) FROM THE CENTER POSITION DEFINED BY THE VALVE AND COMBAL ALIGNMENT MARKS
4	THIS ASSEMBLY MATCHES : BY FUNCTIONAL TEST 31 881 036 DEPARTMENT 1 PAINTING ACCORDING TO SPECIFICATION (RS01) EMBOSSING ACCORDING TO (RS58)

Max pressure:	175 ± 5 bar
Number of revolutions:	5.5
Flow:	16 l/min

Supplier reference:
JRB5043.WC (Rev. A – PS/14/07/2022)

General specification: JED 331-D, Size 150 1440/5 E, JED-702		Rough Part No.	
-		-	
Treatment	Surface Protection		Material
-	Black wet painting or zinc passivation		Iron
Copyright WABCO®			
Date	Signature		
10.05.2023	D. Žuberek		
12.05.2023	M. Mucha		
Expert			
M. Mucha			
Mass	Scale	Material No.	Date of first issue:
45 KG	N/A	440 005 043 R	Doc. Code Language Sheet
		005 EN 1/1	
Size	CAD System	ECN No.	Revision
A 4	CREO	514092	A
		Techn. Resp.	Replacement for
		7103_RM	-