


ID	Dimensions
A	4 SCREWS - TORQUE 290-320 Nm DRY
B	AUXILIARY PORT - TORQUE 68-82Nm
C	RELIEF VALVE CAP TIGHTENING TORQUE 34-47.5Nm DRY
D	ADJUSTING SCREW - TORQUE 43-51Nm DRY
E	8 SCREWS - TORQUE 280-300 Nm DRY
F	R-OUTPUT M18x1.5
G	P-INPUT M16x1.5

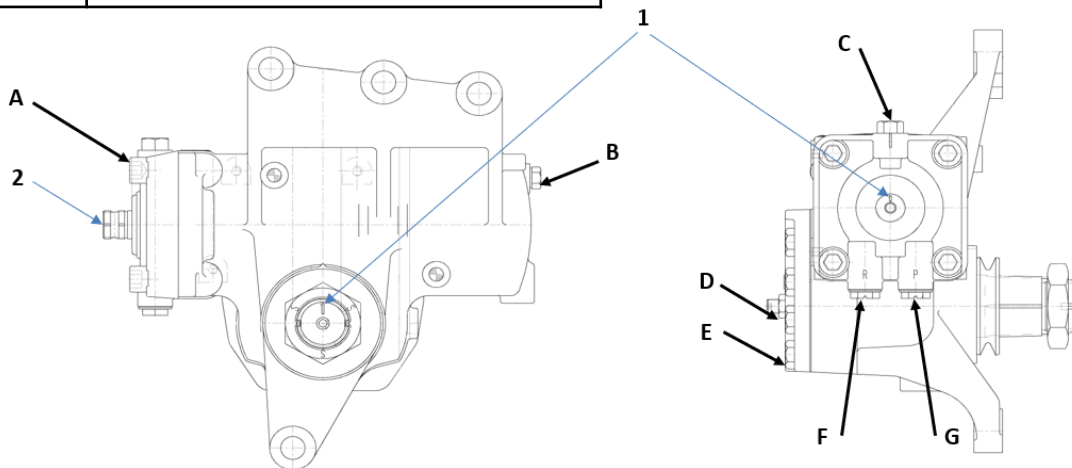


Max pressure:	150 ± 10 bar
Number of revolutions:	6.2
Flow:	16 l/min

Supplier reference:  
**JRB5055.WC (Rev. A – PS/15/07/2022)**

<1>	Safety characteristics	0
<2>	Significant characteristics	0
<CI>	Customer Interface	0

ID	Remark
1	POSITION OF SIGNS FOR DRIVING STRAIGHT
2	1x79 PARALLEL GROOVES
3	INPUT SHAFT ROTATION MUST NOT EXCEED 31° (2.0 INPUT SHAFT REVOLUTIONS) FROM THE CENTER POSITION DEFINED BY THE VALVE AND COMBAL ALIGNMENT MARKS
4	THIS ASSEMBLY MATCHES : BY FUNCTIONAL TEST 31 881 036 DEPARTMENT 1 PAINTING ACCORDING TO SPECIFICATION (RS01) EMBOSSING ACCORDING TO (RS58)

General Specification: JED 331-0 , Size 150 14x15 E , JED 762		Rough Part No.	
-		-	
Treatment	Surface Protection	Material	
-	Black wet painting or zinc passivation	Iron	
Copyright WABCO®		<div>WABCO</div> <div>REMAN Steering gear</div>	
Date	Signature		
Drawn			
10.05.2023	D. Žuberek		
Checked			
12.05.2023	M. Mucha		
Expert			
M. Mucha			
Mass	Scale	Material No.	
40	N/A	440 005 055 R	
KG		Date of first issue:	
		Doc. Code	Language
		005	EN
Size	CAD System	Sheet	
A 4	CREO	1/1	
		ECN No.	Revision
		514092	A
		Techn. Resp.	
		7103_RM	
		Replacement for	
		-	