


Disclaimer: The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

ID	Dimensions
A	RELIEF VALVE CAP TIGHTENING TORQUE 34-47.5Nm DRY
B	4 SCREWS - TORQUE 210-225 Nm DRY
C	ADJUSTING SCREW - TORQUE 43-51Nm DRY
D	8 SCREWS - TORQUE 280-300 Nm DRY
E	R-OUTPUT M18x1.5
F	P-INPUT M16x1.5
G	AUXILIARY PORT - TORQUE 68-82Nm

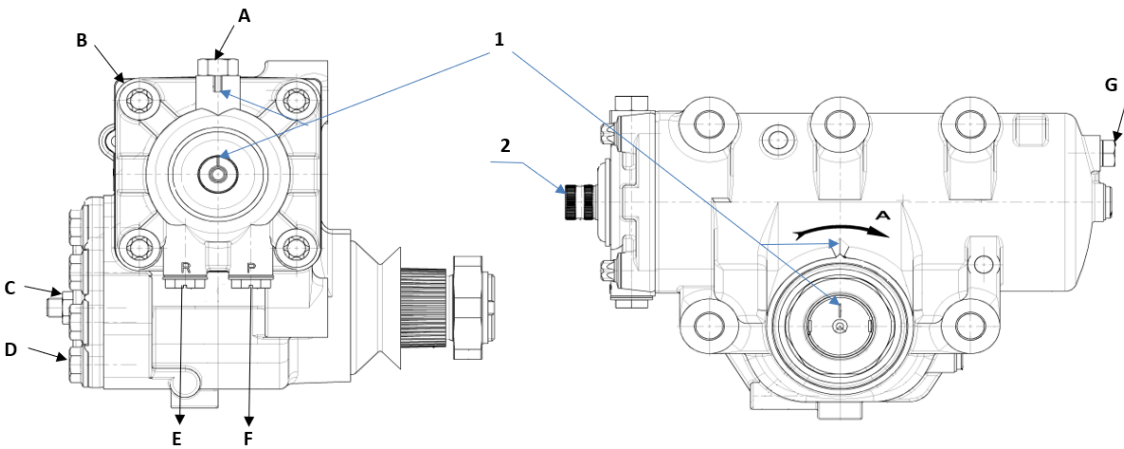

Max pressure:	175 ± 5 bar
Number of revolutions:	5.5
Flow:	16 l/min

Supplier reference:
JRB5545.WC (Rev. A – PS/29/08/2022)

<1>	Safety characteristics	0
<2>	Significant characteristics	0
<CI>	Customer Interface	0

ID	Remark
1	POSITION OF SIGNS FOR DRIVING STRAIGHT
2	1x79 PARALLEL GROOVES
3	INPUT SHAFT ROTATION MUST NOT EXCEED 24° (1.4 INPUT SHAFT REVOLUTIONS) FROM THE CENTER POSITION DEFINED BY THE VALVE AND COMBAL ALIGNMENT MARKS
4	THIS ASSEMBLY MATCHES : BY FUNCTIONAL TEST 31 881 036 DEPARTMENT 1 PAINTING ACCORDING TO SPECIFICATION (RS01) EMBOSSING ACCORDING TO (RS58)

General Specification: JED 331-0 , Size ISO 14605 E , JED 762		Rough Part No.	
-		-	
Treatment	Surface Protection		Material
-	Black wet painting or zinc passivation		Iron
Copyright WABCO®		WABCO	
Date	Signature		
Drawn			
10.05.2023	D. Žuberek		
Checked			
12.05.2023	M.Mucha	REMAN Steering gear	
Expert			
M.Mucha			
Mass	Scale	Material No.	
40		Date of first issue:	
KG	N/A	Doc.Code	Language
		440 005 545 R	005 EN 1/1
Size	CAD System	Replacement for	
A 4	CREO	-	
		ECN.No.	Revision
		514092	A
		Techn. Resp.	7103_RM