
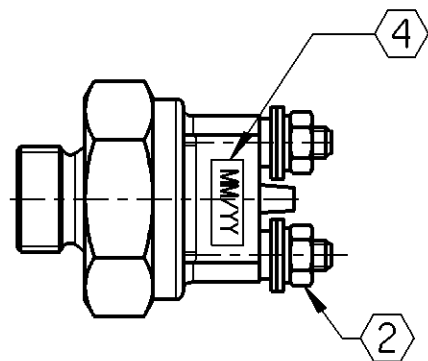
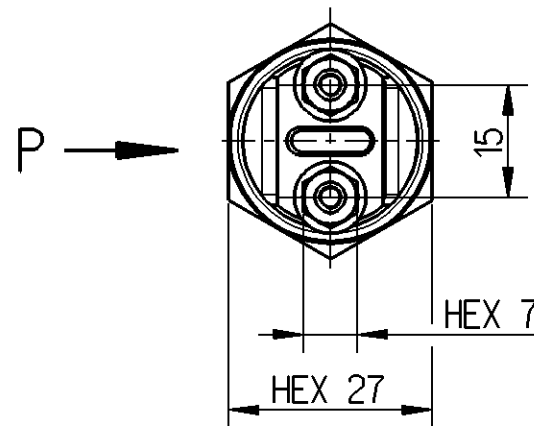


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Tout Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeligung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrucklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

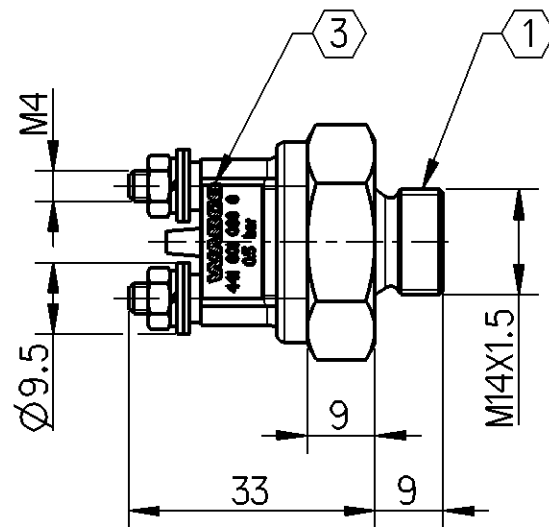

VIEW P



REMARKS	
1	RECOMMENDED TIGHTENING TORQUE
2	RECOMMENDED TIGHTENING TORQUE
3	MONOGRAM, PART No. AND PRESSURE ARE SHOWN HERE
4	BATCH MM/YY ARE SHOWN HERE

SL. No.	NOTES
1.	PRODUCT FUNCTION AND RELIABILITY
1.1	WORKING MEDIUM
1.2	WORKING PRSSURE
1.3	CONTACT CLOSING PRESSRE
1.4	OPERATING VOLTAGE
1.5	CURRENT RATING
1.6	SWITCHING CAPACITY (RESISTIVE LOAD)
1.7	THERMAL RANGE OF OPERATION
1.8	INSTALLATION POSITION
1.9	CORROSION RESISTANCE AS PER ISO 9227
2.	QUALITY COMPLIANCE TESTS WILL BE CARRIED OUT REGULARLY AS PER CLAUSE No. 4 OF 4410010390_035.
3.	SERVICE LIFE TO FIRST OVEHAUL IF FITTED AS PER RECOMMENDED LAYOUT 3 YEAR / 300 000 KM WHICHEVER IS EARLIER FOR CITY BUS APPLICATION
4.	MALE THREAD IS FITTED WITH CLOSURE SLEEVE FOR STORAGE AND TRANSIT PURPOSES.

General Specification: JED-334-1 , Size ISO 14405-1 E						Copyright WABCO®		WABCO STOP LIGHT SWITCH																													
Further Technical Data: 441 001 038 0						Date						Signature																									
Doc. Code: 035		Sheet: 1 To 6				Drawn						2014-02-07 Ashokkumar																									
General Tolerances JED-261						Checked																															
Range of Nominal Dimensions (± mm) <table><tr><td>Class 1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td><td rowspan="4"></td></tr><tr><td>Fine</td><td></td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td>X</td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td></td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td></tr></table>						Class 1)	≤ 50					> 50 ≤ 180	> 180 ≤ 400	> 400		Fine		0.5	1.0	1.5	2.0	Medium	X	1.0	2.0	3.0	4.0	Coarse		2.0	3.5	5.0	6.5	2014-02-07 Senthilmurugan		Expert	
						Class 1)	≤ 50					> 50 ≤ 180	> 180 ≤ 400	> 400																							
						Fine		0.5	1.0	1.5	2.0																										
Medium	X	1.0	2.0	3.0	4.0																																
Coarse		2.0	3.5	5.0	6.5																																
						Laages, Jörg																															
Tapped Holes acc. 1) Tolerance Class Applied Crossmarked						Mass		Scale		Material No.		Date of first issue: 2014-02-06																									
						0.048 KG		1:1		441 001 039 0		Doc.Code		Language		Sheet																					
						Size		CAD System				005		EN		1/1																					
						A 3		Pro/E				ECN-No.		Revision		Techn. Resp.		Replacement for																			
												-		-		A		5090_WIN		-																	

100mm