
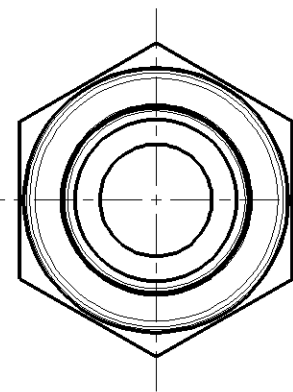
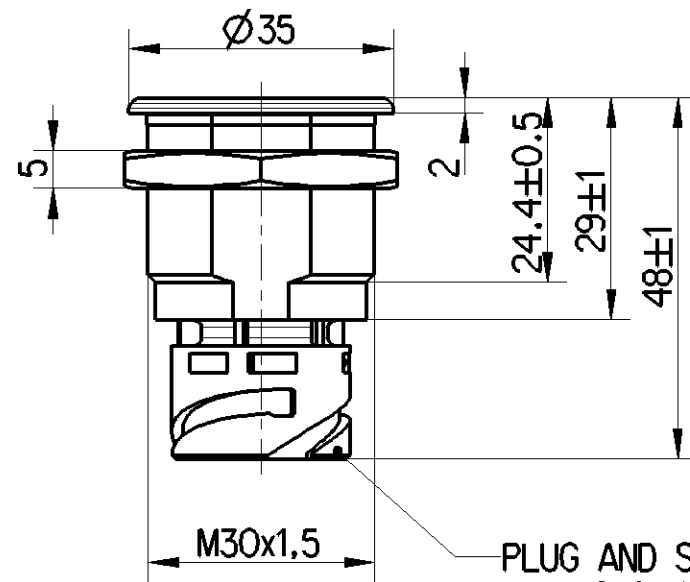


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituira un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modeles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.


Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

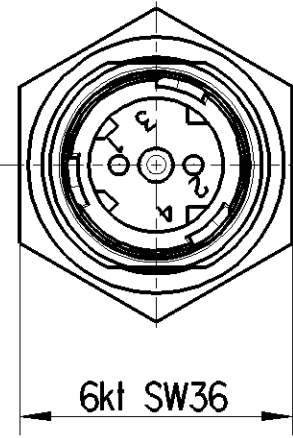

MOUNTING DIMENSIONS

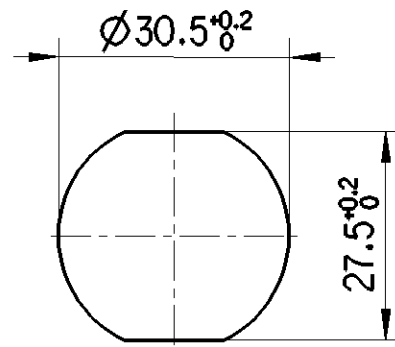

CIRCUIT DIAGRAM

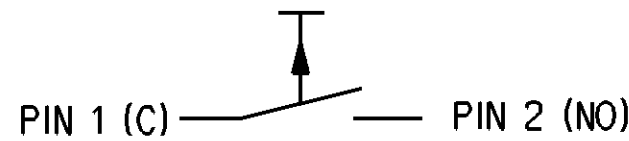

<CI> CUSTOMER INTERFACE 0

TECHNICAL DATA

CONSTRUCTION

SOCKET MATERIAL	PA BLACK
BUTTON MATERIAL	PA GREEN
PROTECTION	INTERIOR: IP67 IEC 60529 CONNECTOR: IP00 IEC 60529
MAX. TORQUE	MAX. 5Nm
WEIGHT	CA. 35g

MECHANICAL DATA

PRE TRAVEL	1.5 ±0.5mm
TOTAL TRAVEL	3 -0.5mm
OPERATING FORCE	30 TO 45N
CURRENT CARRYING PARTS	Cu-ALLOY
CONTACT MATERIAL	Ag-ALLOY
MECHANICAL LIFE	100 000 CYCLES
TEMPERATURE RANGE	-40 °C TO +85 °C

ELECTRICAL DATA

VOLTAGE RANGE	9VDC TO 32VDC
ELECTRICAL LOAD	100mA TO 10A

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP

Further Technical Data:

Doc. Code: Sheet: To

General Tolerances JED-261

		Range of nominal dimensions in mm				
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine		±0.5	±1	±1.5	±2	±3°
Medium	X	±1	±2	±3	±4	
Coarse		±2	±3.5	±5	±6.5	

Tapped Holes acc.

1) Tolerance Class Applied Crossmarked

Copyright WABCO®

Date Signature

Drawn

2023-03-17 Markuszewski

Checked

2023-03-17 Szulc

Dimensions in mm

Mass	Scale	Material No.		Date of first issue: 2022-12-06		
0.035 kg	1:1	441 006 029 0		Doc.Code	Language	Sheet
Size	CAD System			005	EN	1/1
A 3	CREO	ECN-No.	Revision	Techn. Resp.	Replacement for	
		-	3x A	3205_SW		

WABCO

SWITCH