


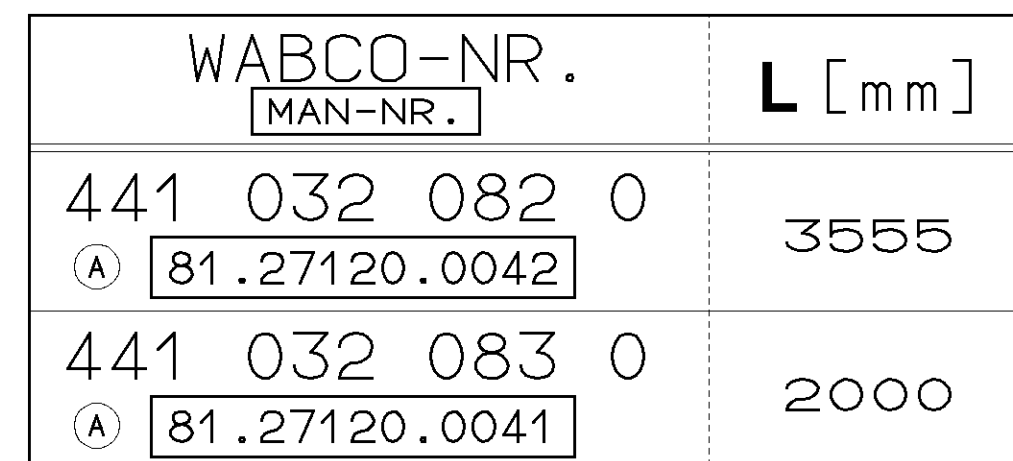

BEND RADIUS CABLE  
BIEGERADIUS KABEL  
RAYON DE COURBURE DE CABLE  
RAGGIO DI CURVATURA DEL CAVO

} R 15 MIN,  $\nless 90^\circ$

\*\* TWO CORE CABLE  
 LEITUNG ZWEIADRIG  
 CABLE A DEUX CONDUCTEURS  
 CAVO A DUE CONDUTTORI

} THERMORAD  
 2x0.96mm<sup>2</sup> [AWG 18]  
 EPD 33336 A

\* ABRASION RESISTANT PRINT  
ABRIEBFESTER AUFDRUCK  
RESISTANTE A L'ABRASION  
RESISTENTE ALL'ABRASIONE

} RAL 9001

Y 2:1

PART NO.  
TEILE-NR. \*  
NO.DE PIECE  
CODICE

**WABCO** 441 032 08. C

THERMAL RANGE OF APPLICATION FOR SENSOR  
THERMISCHER ANWENDUNGSBEREICH FÜR SENSOR  
GAMME D'APPLICATION THERMIQUE POUR CAPTEUR  
CAMPO DI APPLICAZIONE TERMICA DEL SENSORE

-40° C...+150° C

THERMAL RANGE OF APPLICATION FOR CABLE  
THERMISCHER ANWENDUNGSBEREICH FÜR KABEL  
GAMME D'APPLICATION THERMIQUE POUR CÂBLE  
CAMPO DI APPLICAZIONE TERMICA DEL CAVO

-40° C...+180° C  
+220° C[1h]

TYPE OF PROTECTION (IN CONNECTION WITH CONNECTOR)  
SCHUTZART (IN VERBINDUNG MIT KUPPLUNG)  
MODE DE PROTECTION (DANS CONNECTION AVEC COUPLAGE)  
TIPO DI PROTEZIONE (CON CONNETTORE INGAGGIATO)

IP 69 K  
EN 60529/IEC 529

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION  
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION  
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION  
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

441 032 070 0

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION  
EINBAUHNWEISE SIEHE ADAPTIONS-SPEZIFIKATION  
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION  
ISIRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO

884 830 015 0

|                                         |  |  |  |  |        |  |  |  |  |         |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |        |  |  |  |  |                    |  |  |  |  |                                                                        |  |  |  |  |      |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
|-----------------------------------------|--|--|--|--|--------|--|--|--|--|---------|--|--|--|--|--|--|--|--|--|----------------------------|--|--|--|--|--------|--|--|--|--|--------------------|--|--|--|--|------------------------------------------------------------------------|--|--|--|--|------|--|--|--|--|------|--|--|--|--|--------------|--|--|--|--|------------------|--|--|--|--|------------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|----------------------------|--|--|--|--|--|--|--|--|--|-----------|--|--|--|--|--|--|--|--|--|
| GENERAL SPECIFICATION: JED-334          |  |  |  |  |        |  |  |  |  |         |  |  |  |  |  |  |  |  |  | CADAM-DRAWING<br>COPYRIGHT |  |  |  |  |        |  |  |  |  | <b>WABCO</b>       |  |  |  |  |                                                                        |  |  |  |  |      |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| FURTHER TECHNICAL DATA:                 |  |  |  |  |        |  |  |  |  |         |  |  |  |  |  |  |  |  |  | DATE                       |  |  |  |  |        |  |  |  |  | SIGNATURE          |  |  |  |  |                                                                        |  |  |  |  |      |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| DOC. CODE:                              |  |  |  |  | SHEET: |  |  |  |  | TD      |  |  |  |  |  |  |  |  |  |                            |  |  |  |  | DRAWN: |  |  |  |  |                    |  |  |  |  | INDUCTIVE SENSOR<br>STABSSENSOR<br>CAPTEUR (TIGE)<br>SENSORE INDUTTIVO |  |  |  |  |      |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| GENERAL TOLERANCES                      |  |  |  |  |        |  |  |  |  |         |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |        |  |  |  |  | 49-01-11 HARNISCHM |  |  |  |  |                                                                        |  |  |  |  |      |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| RANGE OF NOMINAL DIMENSIONS<br>( ± mm ) |  |  |  |  |        |  |  |  |  |         |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |        |  |  |  |  | CHECKED:           |  |  |  |  |                                                                        |  |  |  |  |      |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| CLASS 1)                                |  |  |  |  |        |  |  |  |  | ≤50     |  |  |  |  |  |  |  |  |  | > 50<br>≤180               |  |  |  |  |        |  |  |  |  | >180<br>≤400       |  |  |  |  |                                                                        |  |  |  |  |      |  |  |  |  | >400 |  |  |  |  |              |  |  |  |  | 49-01-11 HOEFLER |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| FINE                                    |  |  |  |  |        |  |  |  |  | 0,5     |  |  |  |  |  |  |  |  |  | 1,0                        |  |  |  |  |        |  |  |  |  | 1,5                |  |  |  |  |                                                                        |  |  |  |  | 2,0  |  |  |  |  |      |  |  |  |  | ± 3°         |  |  |  |  |                  |  |  |  |  | STANDARDIZATION: |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| MEDIUM                                  |  |  |  |  |        |  |  |  |  | 1,0     |  |  |  |  |  |  |  |  |  | 2,0                        |  |  |  |  |        |  |  |  |  | 3,0                |  |  |  |  |                                                                        |  |  |  |  | 4,0  |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  | 49-01-11 PANTZER |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| COARSE *                                |  |  |  |  |        |  |  |  |  | 2,0     |  |  |  |  |  |  |  |  |  | 3,5                        |  |  |  |  |        |  |  |  |  | 5,0                |  |  |  |  |                                                                        |  |  |  |  | 6,5  |  |  |  |  |      |  |  |  |  |              |  |  |  |  |                  |  |  |  |  | MASS             |  |  |  |  |  |  |  |  |  | SCALE      |  |  |  |  |  |  |  |  |  | PRODUCT IDENTIFICATION NO. |  |  |  |  |  |  |  |  |  | DOC. CODE |  |  |  |  |  |  |  |  |  |
| TAPPED HOLES ACC. ISO 4039 / JED-152    |  |  |  |  |        |  |  |  |  | 054509  |  |  |  |  |  |  |  |  |  | 2× A                       |  |  |  |  |        |  |  |  |  | 94-02-07           |  |  |  |  |                                                                        |  |  |  |  | / KG |  |  |  |  |      |  |  |  |  | 1:1<br>(2:1) |  |  |  |  |                  |  |  |  |  | 441 032 081 0    |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
| 1) TOLERANCE CLASS APPLIED CORRELATED   |  |  |  |  |        |  |  |  |  | DCN-NO. |  |  |  |  |  |  |  |  |  | REV.                       |  |  |  |  |        |  |  |  |  | DATE               |  |  |  |  |                                                                        |  |  |  |  | SIZE |  |  |  |  |      |  |  |  |  | T.R.I.       |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  | SHAPE CODE |  |  |  |  |  |  |  |  |  | REPLACEMENT FOR            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |
|                                         |  |  |  |  |        |  |  |  |  |         |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |        |  |  |  |  |                    |  |  |  |  |                                                                        |  |  |  |  | A 2  |  |  |  |  |      |  |  |  |  | 141          |  |  |  |  |                  |  |  |  |  |                  |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |                            |  |  |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |  |