



Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

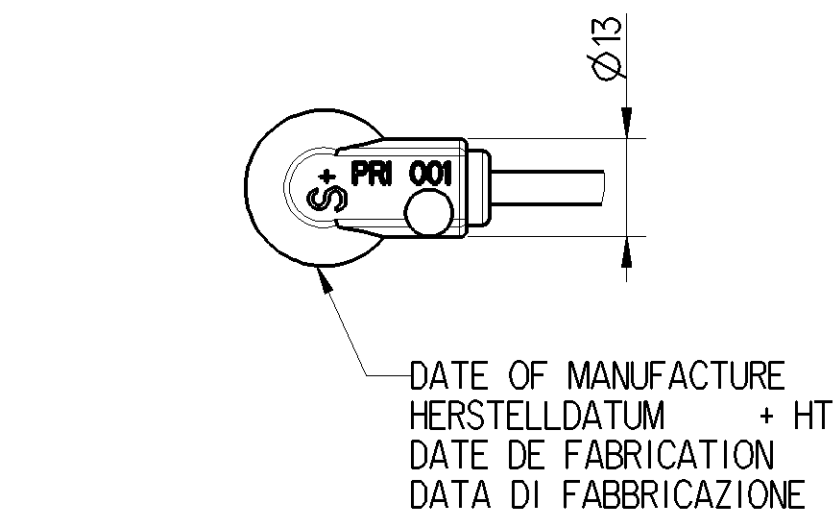

TWO CORE CABLE LEITUNG ZWEIADRIG CABLE A DEUX CONDUCTEURS CAVO A DUE CONDUTTORI	} THERMORAD 2x0.5 mm² ASC 77799 A
STRAIN RELIEF CABLE ZUGENTLASTUNG KABEL ARRET DE CABLE SCARICO DI TRAZIONE DEL CAVO	} MAX.50N $\vartheta = 20^{\circ}\text{C}$
BEND RADIUS CABLE BIEGERADIUS KABEL RAYON DE COURBURE DE CABLE RAGGIO DI CURVATURA DEL CAVO	} R 15 MIN, $\sphericalangle 90^{\circ}$
* ABRASION RESISTANT PRINT ABRIEBFESTER AUFDRUCK IMPRESSION RESISTANTE A L' ABRASION IMPRONTA RESISTENTE ALL' ABRASIONE	} RAL 9001

STAMP PART NO
AUFDRUCK TEILE NR. *
MARQUAGE DE NO. DE PIECE
STAMPIGLIATURA DEL CODICE



THERMAL RANGE OF APPLICATION	}	I	-40°C...+200°C[1000h] +210°C[1h]
THERMISCHER ANWENDUNGSBEREICH		II	-40°C...+150°C +180°C[1h]
GAMME D'APPLICATION THERMIQUE		III	-40°C...+180°C +220°C[1h]
CAMPO TERMICO D'APPLICAZIONE			


FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUHINWEISE SIEHE ADAPTION-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISTRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO

441 032 100 0

DEGREE OF PROTECTION (IN CONNECTION WITH CONNECTOR)
SCHUTZART (IN VERBINDUNG MIT KUPPLUNG)
DEGRE DE PROTECTION (DANS CONNECTION AVEC COUPLAGE)
GRADO DI PROTEZIONE (CON CONNETTORE INGAGGIATO)

} IP 69 K
ISO 20653

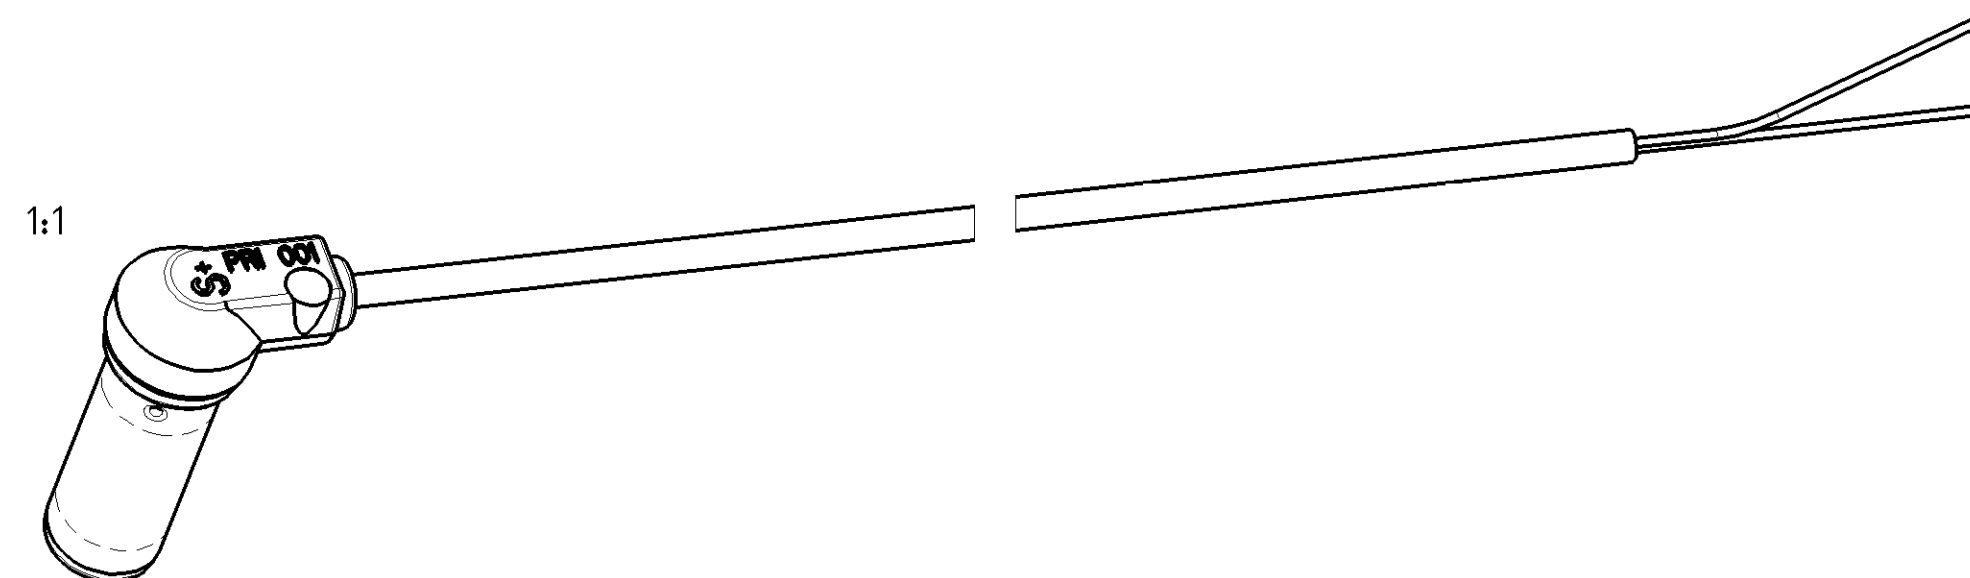

General Specification: JED-334-1 , Size ISO 14405 LP					Copyright WABCO®		WABCO																													
Further Technical Data:					Date		Signature																													
Doc. Code:		Sheet: To			Drawn		INDUCTIVE SENSOR																													
General Tolerances JED-261					2014-08-21		Li																													
<table><tr><td colspan="5">Range of Nominal Dimensions (± mm)</td><td rowspan="4"></td></tr><tr><td>Class 1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td></tr><tr><td>Fine</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td><td></td></tr></table>					Range of Nominal Dimensions (± mm)						Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Fine	0.5	1.0	1.5	2.0	Medium	1.0	2.0	3.0	4.0	Coarse	2.0	3.5	5.0	6.5		Checked		CAPTEUR (TIGE)		
					Range of Nominal Dimensions (± mm)																															
					Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																											
					Fine	0.5	1.0	1.5	2.0																											
Medium	1.0	2.0	3.0	4.0																																
Coarse	2.0	3.5	5.0	6.5																																
					2014-09-04		Daisidas																													
					Expert		SENSORE INDUTTIVO																													
					Daisidas																															
					Mass		Scale		Material No.																											
					0.100 KG		1:1 2:1		441 032 099 0																											
					Size		CAD System		Date of first issue:																											
					A 2		CREO		Doc.Code Language Sheet																											
1) Tapped Holes acc.							ECN-No.		Revision																											
1) Tolerance Class Applied Crossmarked							164156		1 D																											
							6310_EM		Techn. Resp.																											
									Replacement for																											
									-																											