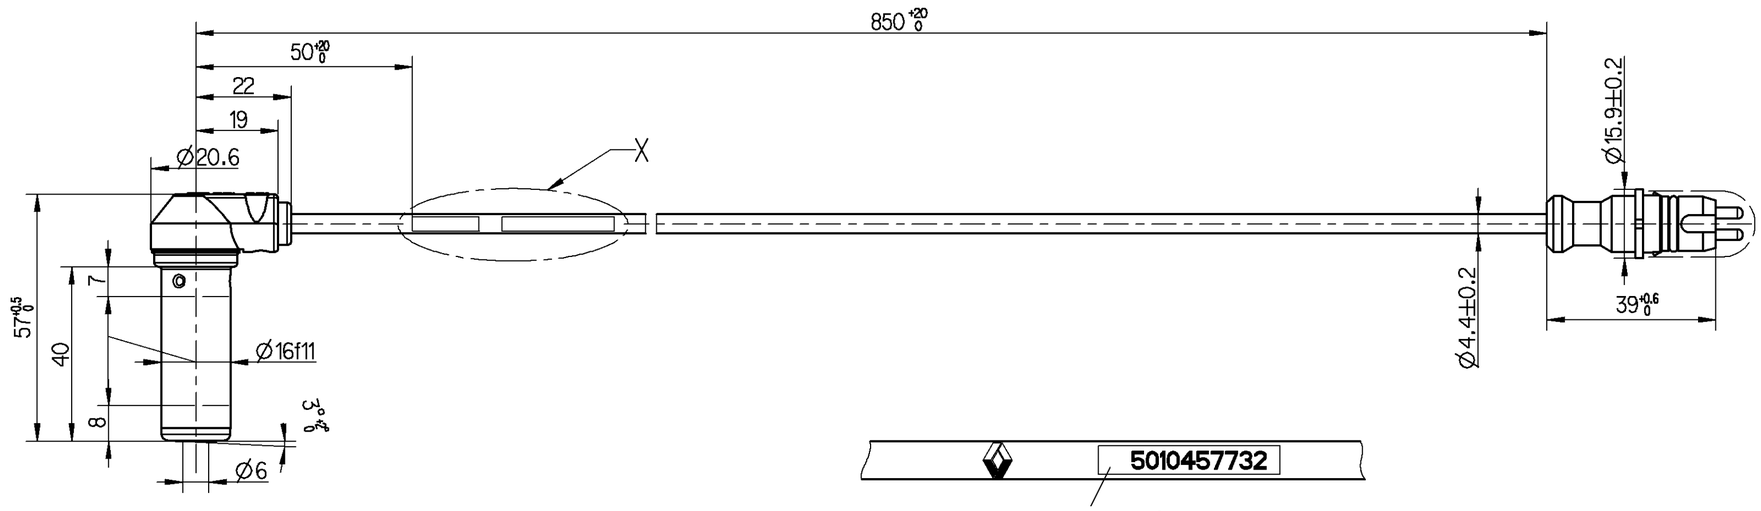

PROTECTION CAP
SCHUTZKAPPE
CAPOUCHON
PROTETTORO



WEEK AND YEAR OF MANUFACTURE
FERTIGUNGSWOCHE UND JAHR *
SEMAINE ET ANNEE DE FABRICATION
SETTIMANA E ANNO DELLA FABBRICAZIONE

X
2:1

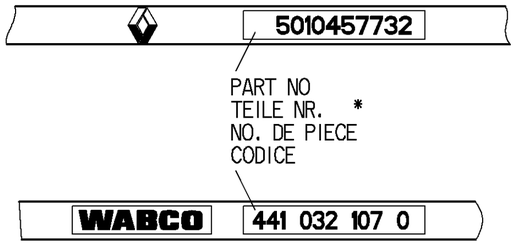

PART NO
TEILE NR. *
NO. DE PIECE
CODICE

TWO CORE CABLE LEITUNG ZWEIADRIG CABLE A DEUX CONDUCTEURS CAVO A DUE CONDUTTORI	THERMORAD 2x0.5mm² ASC 77799 A
STRAIN RELIEF CABLE ZUGENTLASTUNG KABEL ARRET DE CABLE SCARICO DI TRAZIONE DEL CAVO	MAX.50N ϑ=20°C
BEND RADIUS CABLE BIEGERADIUS KABEL RAYON DE COURBURE DE CABLE RAGGIO DI CURVATURA DEL CAVO	R 15 MIN, ∢ 90°
* ABRASION RESISTANT PRINT ABRIEBFESTER AUFDRUCK IMPRESSION RESISTANTE A L' ABRASION IMPRONTA RESISTENTE ALL' ABRASIONE	RAL 9001

THERMAL RANGE OF APPLICATION FOR SENSOR THERMISCHER ANWENDUNGSBEREICH FUER SENSOR GAMME D'APPLICATION THERMIQUE POUR SENSOR CAMPO TERMICO D'APPLICAZIONE DEL SENSORE	-40 °C...+150 °C +180 °C[1h]
THERMAL RANGE OF APPLICATION FOR CABLE THERMISCHER ANWENDUNGSBEREICH FUER KABEL GAMME D'APPLICATION THERMIQUE POUR CABLE CAMPO TERMICO D'APPLICAZIONE DEL CAVO	-40 °C...+180 °C +220 °C[1h]
THERMAL RANGE OF APPLICATION FOR CONNECTOR PLUG THERMISCHER ANWENDUNGSBEREICH FUER KUPPLUNGSSTECKER GAMME D'APPLICATION THERMIQUE POUR CONNECTEUR MALE CAMPO TERMICO D'APPLICAZIONE DEL CONNETTORE	-40 °C...+80 °C
FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO	441 032 808 0
INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION EINBAUHINWEISE SIEHE ADAPTIONS-SPEZIFIKATION INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION ISIRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO	441 032 100 0
DEGREE OF PROTECTION (IN CONNECTION WITH SOCKET) SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSDOSE) DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR) GRADO DI PROTEZIONE (IN COLLAGAMENTO CON CONNETTORE)	IP 68 / IP 69 K EN 60529/IEC 529

1:1



GENERAL SPECIFICATION: JED-334.0							
FURTHER TECHNICAL DATA:							
DOC. CODE:		SHEET: TO					
GENERAL TOLERANCES							
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm) ≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		
FINE		0.5	1.0	1.5	2.0	±3°	
MEDIUM		1.0	2.0	3.0	4.0		
COARSE	X	2.0	3.5	5.0	6.5		
TAPPED HOLES ACC. ISO 4039 / JED-152							
1) TOLERANCE CLASS APPLIED CROSSMARKED						DCN-NO.	REV.	DATE

Pro/ENGINEER DRAWING COPYRIGHT		WABCO	
DATE	SIGNATURE		
DRAWN 01-11-28	HARNISCHM.	INDUCTIVE SENSOR WITH PLUG STABSENSOR MIT KUPPLUNGSSTECKER CAPTEUR AVEC CONNECTEUR MALE SENSORE INDUTTIVO CON CONNETTORE	
CHECKED 01-11-28	HOEFLER		
EXPERT CODE 7 6 0			
MASS 0.100 KG	SCALE 1:1 2:1	PRODUCT IDENTIFICATION NO. 441 032 107 0	DOC. CODE 605 / SHEET 1/1
SIZE A 2	TRI 142	FUNCTION CODE	SHAPE CODE	PRODUCT TYPE 0 1	REPLACEMENT FOR

100mm

DRW.: 4410320700___605
TMD.: 4410320300___A09

TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION OU COMMUNICATION DE SON CONTENU OU DE PARTIES DE CELUI-CI SONT INTERDITES SAUF AUTORISATION EXPRESSE ECRITE. TOUS DROITS DE PROPRIETE INDUSTRIELLE RESERVES. NOTAMMENT EN MATIERE DE BREVETS ET DE MODELES.
NON È PERMESSO CONSEGNARE A TERZI O RIPRODURRE QUESTO DOCUMENTO, NE UTILIZZARNE IL CONTENUTO O RENDERLO COMUNQUE NOTO A TERZI, SALVO AUTORIZZAZIONE SCRITTA. UN'EVENTUALE CONTRAVVENZIONE DARÀ LUOGO AL RISARCIMENTO DEI DANNI. TUTTI I DIRITTI RISERVATI IN PARTICOLARE QUELLI DI BREVETTO O MODELLO.
BEITERGABE SOWIE VERVIELFAELTIGUNG DIESER UNTERLAGE, VERWERTUNG UND MITTEILUNG IHRES INHALTS NICHT GESTATTET, SOWEIT NICHT AUSDRUECKLICH ZUGESTANDEN. ZUWIDERHANDLUNGEN VERPFLICHTEN ZUM SCHADENERSATZ. ALLE RECHTE FUER DEN FALL DER PATENTERTEILUNG ODER GEBRAUCHSMUSTER-EINTRAGUNG VORBEHALTEN.
COPYING OF THIS DOCUMENT AND GIVING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF, ARE FORBIDDEN WITHOUT EXPRESS AUTHORITY. OFFENDERS ARE LIABLE TO THE PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE GRANT OF PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN. THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT.