



Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Toute utilisation non autorisée est formellement interdite. E' vietato usare o diffondere questo documento o i suoi contenuti senza permesso scritto dalla WABCO. Alle Rechte hier und an der Patentierung aller Erfindungen vorbehalten. WABCO reserves all rights in this document and giving it to others and the use or communication of the contents thereof, are forbidden without express written permission from WABCO. Toute utilisation non autorisée est formellement interdite. E' vietato usare o diffondere questo documento o i suoi contenuti senza permesso scritto dalla WABCO. Alle Rechte hier und an der Patentierung aller Erfindungen vorbehalten.

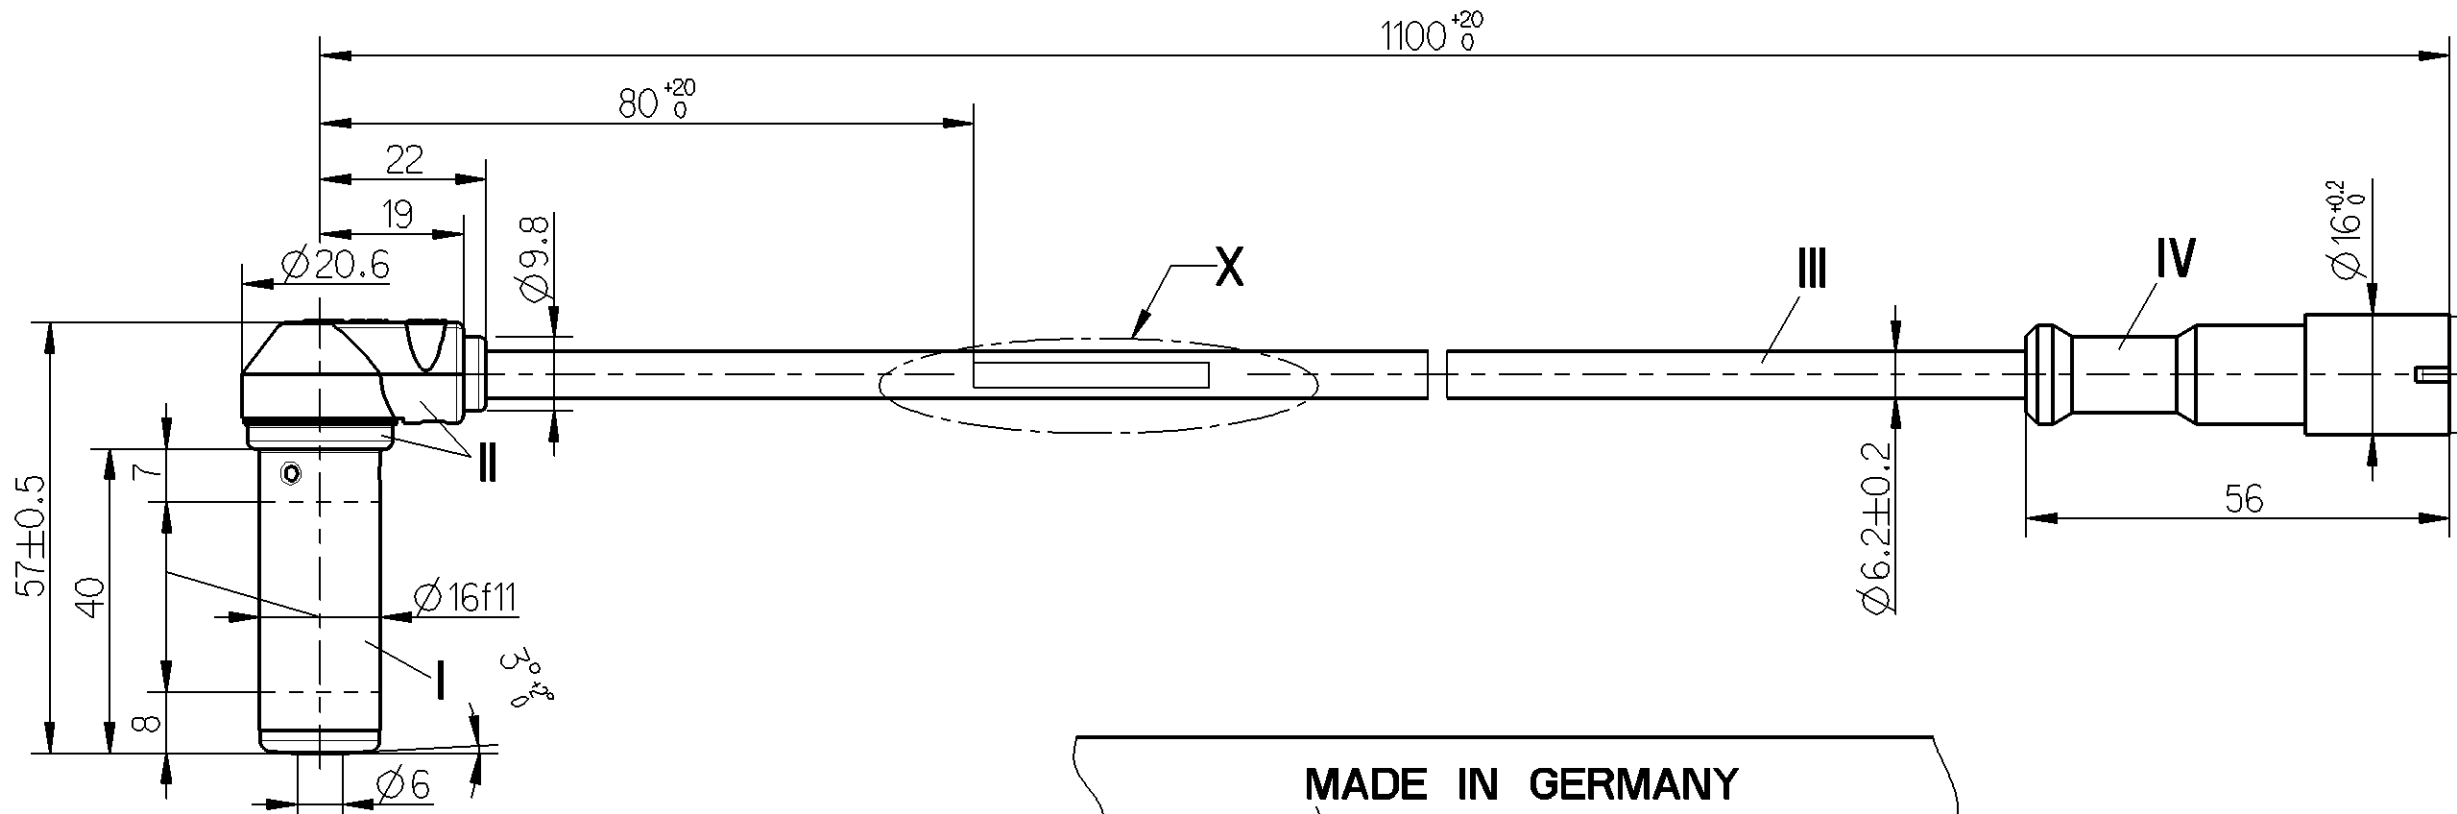

----- PROTECTION CAP
SCHUTZKAPPE
CAPOUCHON
PROTETTORE

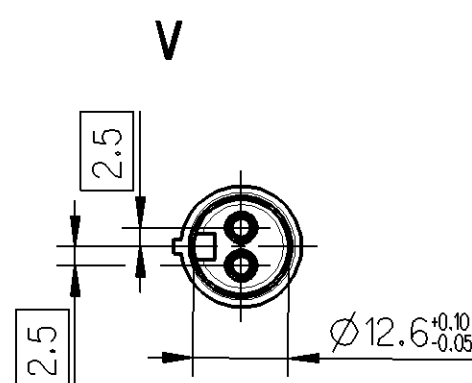

MADE IN GERMANY

PART NO. *
TEILE NR. *
NO. DE PIECE
CODICE

WABCO 441 032 194 0

DATE OF MANUFACTURE
HERSTELLDATUM + HT
DATE DE FABRICATION
DATA DI FABBRICAZIONE

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO TERMICO D'APPLICAZIONE

I -40 °C...+200 °C [1000h]
+210 °C [1h]
II -40 °C...+160 °C
+180 °C [1h]
III -40 °C...+180 °C
+220 °C [1h]
IV -40 °C...+80 °C

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO


441 032 184 0

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUINWEISE SIEHE ADAPTION-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISIRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO

441 032 100 0

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG)
SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSSTECKER)
DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR MALE)
GRADO DI PROTEZIONE (IN COLLAGAMENTO CON SPINOTTO)

IP 68
IP 69 K ↔ ISO 20653

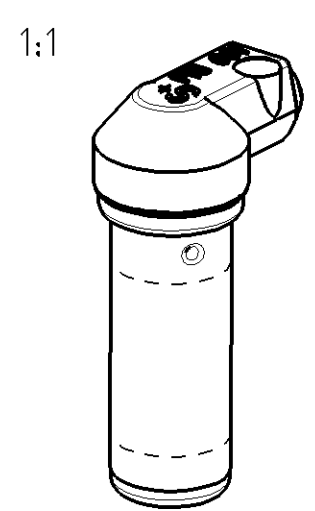

TWO CORE CABLE
LEITUNG ZWEIADRIG
CABLE A DEUX CONDUCTEURS
CAVO A DUE CONDUTTORI

CCS
2x0.5mm²

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO

MAX.50N @ -20 °C

BEND RADIUS CABLE
BIEGERADIUS KABEL
RAYON DE COURBURE DE CABLE
RAGGIO DI CURVATURA DEL CAVO

R 15 MIN, α 90°

* ABRASION RESISTANT PRINT
ABRIEBFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

RAL 9001

General Specification: JED-334-0							Copyright WABCO®				WABCO INDUCTIVE SENSOR WITH SOCKET STABSSENSOR MIT KUPPLUNGSDOSE CAPTEUR AVEC CONNECTEUR FEMELLE SENSORE INDUTTIVO CON CONNETTORE									
Further Technical Data:							Date		Signature											
Doc. Code:		Sheet:		To			Drawn		2009-06-18						Harnischmacher					
General Tolerances JED-261							Checked		2009-07-22						Gruendker					
							Expert		Heinrich											
Class 1)		Range of Nominal Dimensions (± mm)							Mass		Scale		Material No.				Date of first issue: 2009-07-22			
Fine		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	▽			0,072 kg	1:1 2:1	441 032 194 0				Doc.Code		Language		Sheet	
Medium		1.0	2.0	3.0	4.0	±3°									005		ML		1/1	
Coarse	X	2.0	3.5	5.0	6.5				Size		CAD System		ECN-No.		Revision		Techn. Resp.		Replacement for	
Tapped Holes acc.							A 2		Pro/E				-		-		6310_EM			
1) Tolerance Class Applied Crossmarked																			100mm	