‹1› SAFETY CHARACTERISTICS	0
‹2› SIGNIFICANT CHARACTERISTICS	0

Ø16f11 -0.016 -0.126

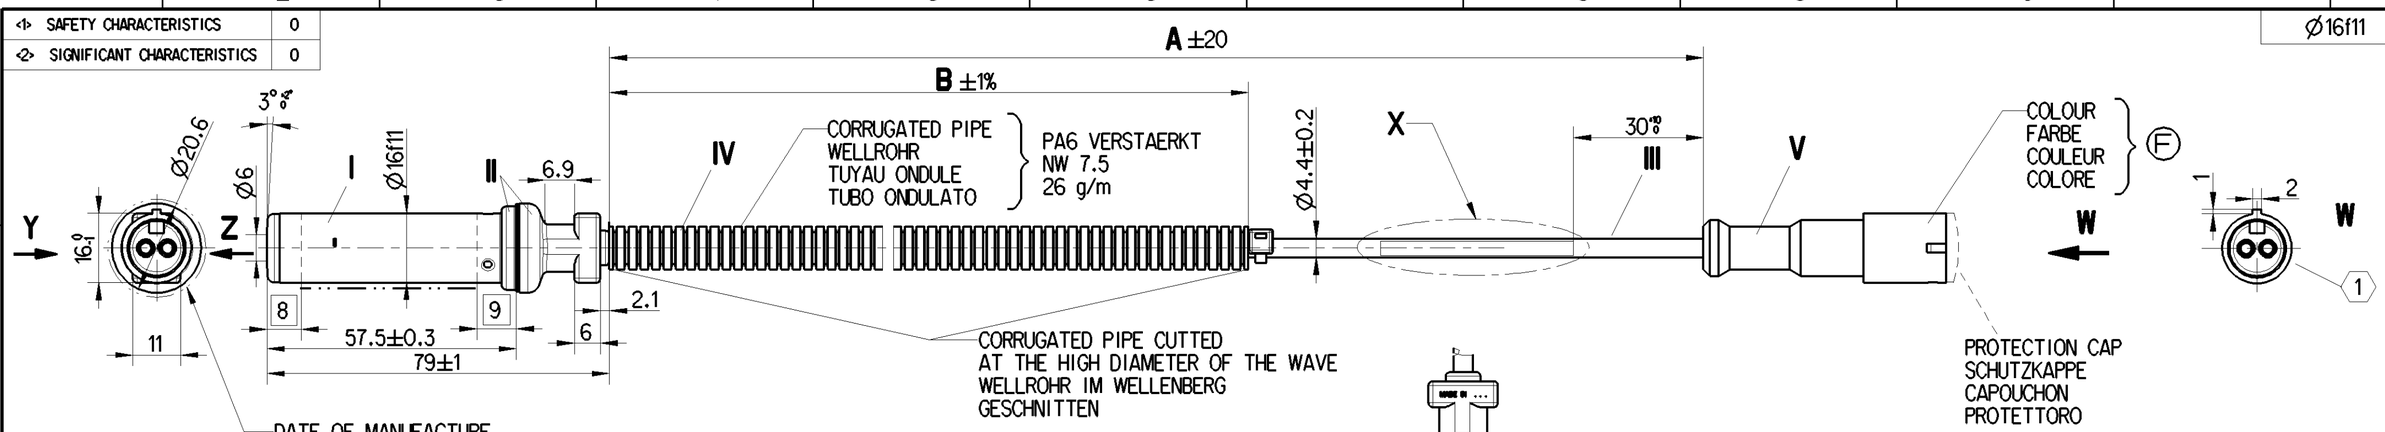

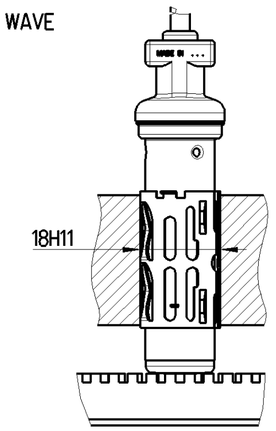

CLAMPING BUSH
KLEMMBUCHSE
BAGUE DE SERRAGE
BUSSOLA DI SERRAGGIO
899 759 815 4 CrNi
899 760 510 4 CuBe

POLE WHEEL DESIGN DETAILS, SEE SPECIFICATION
POLRADAUSFUEHRUNG SIEHE SPEZIFIKATION
DÉTAILS DE ROUE POLAIRE, VOIR SPÉCIFICATION
DETTAGLIO RUOTA POLARE: VEDERE SPECIFICA
895 905 000 4 (DOC. 035)

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUHINWEISE SIEHE ADAPTIONS-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISIRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO
441 032 100 0 (DOC. 035)

WABCO 441 032 3. . 0

PART NO
TEILE NR.
NO. DE PIECE
CODICE

Y
2:1



IDENTIFICATION OF COUNTRY OF ORIGIN
OPTIONAL PRINT ON CABLE

X
2:1

MADE IN . . . . .

Z
2:1



PRI-NO.

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG)
SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSSTECKER)
DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR MALE)
GRADO DI PROTEZIONE (IN COLLAGAMENTO CON SPINOTTO)
IP 6K8, IP 6K9K ISO 20653

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO
441 035 381 0 (DOC. 035)

WABCO-NO.	A [mm]	B [mm]	Ⓕ	MASS [kg]
441 032 394 0	3000	-	BLACK SCHWARZ NOIR NERO	0.124
441 032 393 0	3000	-	ORANGE ORANGE ORANGE ARANCIONE	0.124
441 032 341 0	800	680	BLACK SCHWARZ NOIR NERO	0.084
441 032 340 0	800	680	ORANGE ORANGE ORANGE ARANCIONE	0.084

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO TERMICO D'APPLICAZIONE

I	-40 °C...+200°C[1000h]	+210°C[1h]
II	-40 °C...+160°C	+180°C[1h]
III	-40 °C...+180°C	+220°C[1h]
IV	-40 °C...+120°C	+150°C[1h]
V	-40 °C...+80°C	

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO
MAX.50N ϑ=20°C

(1) MATCHING: INTERFACE DRAWING
PASSEND ZU: AUSFUEHRUNGSVORSCHRIFT
ASSORTI: DESSIN D'INTERFACE
ADATTO A: DISEGNO DI INTERFACCIA
858 000 833 4 (DOC. 007)

MATERIAL WERKSTOFF	
SENSOR BODY SENSORGEHAEUSE	STAINLESS STEEL
SENSOR HEAD SENSORKOPF	POLYAMIDE
SENSOR CABLE SENSORKABEL	2x0.5mm² (Cu) CROSS LINKED POLYMER JACKET
CONNECTOR SOCKET KUPPLUNGSDOSE	POLYURETHAN
CONTACT KONTAKT	Ø2.5 CuSn / Ag

Class 1)	Range of Nominal Dimensions (± mm) ≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	∢
Fine	0.5	1.0	1.5	2.0	±3°
Medium	1.0	2.0	3.0	4.0	
Coarse	2.0	3.5	5.0	6.5	

Tapped Holes acc.
1) Tolerance Class Applied Crossmarked

General Specification: JED-334-1 , Size ISO 14405 LP
Further Technical Data:
Doc. Code: Sheet: To
General Tolerances JED-261

Copyright WABCO®

Date	Signature
Drawn 2018-11-13	Andrew Li
Checked 2018-11-26	Nieber
Expert	Harnischmacher

WABCO

INDUCTIVE SENSOR WITH SOCKET
SENSORKABEL MIT KUPPLUNGSDOSE
CABLE DU CAPTEUR AVEC CONNECTEUR
CAVO DEL SENSORE CON CONNETTORE

Mass	Scale	Material No.	Date of first issue: 2005-11-16		
/ KG	1:1 2:1	441 032 339 0	Doc.Code	Language	Sheet
			053	ML	1/1
Size	CAD System				
A 2	CREO				

ECN-No.	Revision	Techn. Resp.	Replacement for
176924	1 C	6310_EM	

100mm

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un délit. Sauf autorisation expresse et exposé Son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle reserves, notamment en matiere de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Non è permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione espliclta. Ogni infrazione costituira un evidente abuso e comportera il risar cimento dei danni subiti.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.