
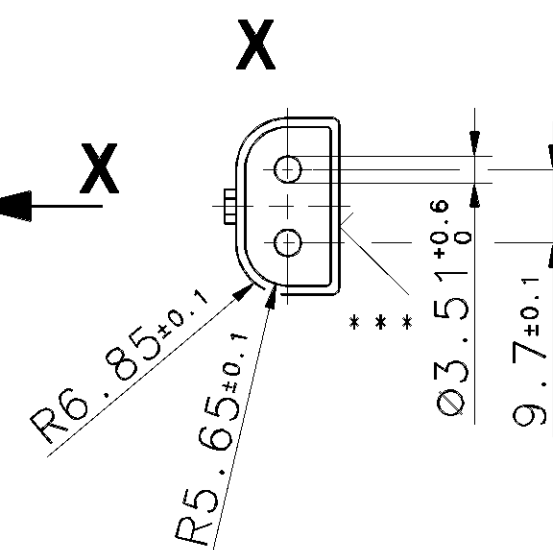


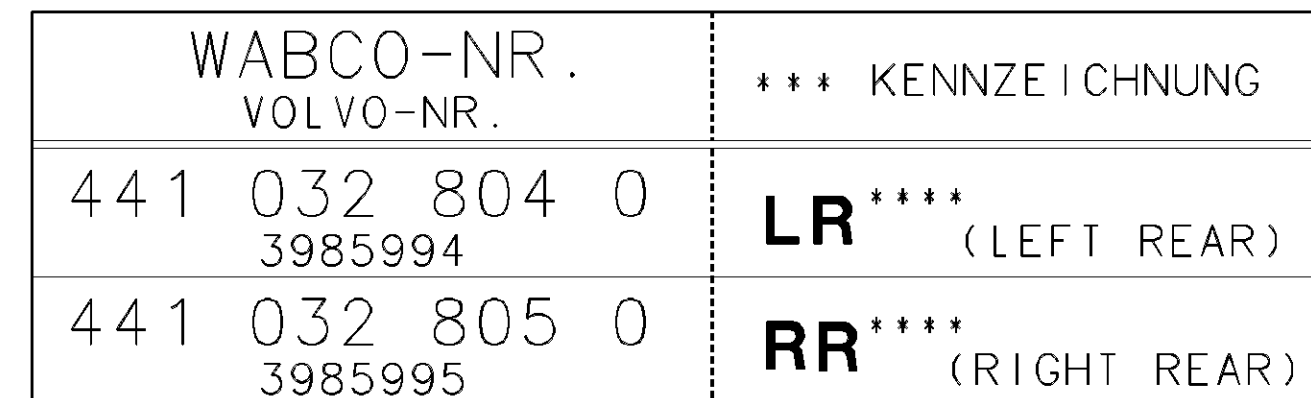

**VOLVO** 398599

WABCO 441 032 80.0

RAL 9001

-40 °C . . . +150 °C

-40 °C . . . +180 °C  
+220 °C [1h]

-40 °C . . . +80 °C

IP 68  
EN 60529/IEC 529

441 032 092 0

884 830 015 0

\* DIMENSION AT 2.5±0.5% CONDITIONED CORRUGATED HOSE  
MASS BEI 2.5±0.5% KONTIONIERTEM WELLROHR  
DIMENSION D'UNE GAINÉ ANNELEE CONDITIONNÉE A 2.5±0.5%  
DIMENSIONE DEL TUBO ONDULATO INVECCHIARE 2.5±0.5%

\* \* TWO CORE CABLE  
LEITUNG ZWEIADIG  
CABLE A DEUX CONDUCTEURS  
CAVO A DUE CONDUTORI

THERMORAD  
2x0.96mm<sup>2</sup> [AWG 18]  
EPD 33336 A

STRAIN RELIEF CABLE  
ZUGENTLASTUNG KABEL  
ARRET DE CABLE  
SCARICO DI TRAZIONE DEL CAVO

MAX. 50N  $\vartheta = 20^\circ \text{C}$

BEND RADIUS CABLE  
BIEGERADIUS KABEL  
RAYON DE COURBURE DE CABLE  
RAGGIO DI CURVATURA DEL CAVO

R 15 MIN,  $\angle 90^\circ$

[illegible]