


PART NO
TEILE NR. *
NO. DE PIECE
CODICE

BARCODE 128 $\longleftrightarrow$ ISO/IEC 15417 *

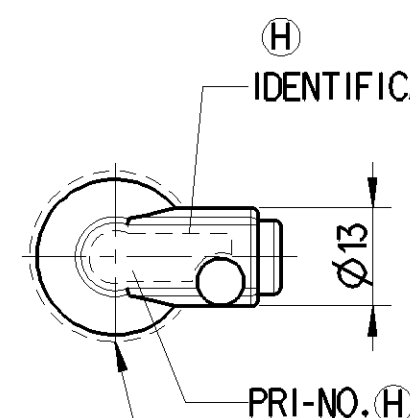

IDENTIFICATION OF COUNTRY OF ORIGIN
*OPTIONAL PRINT ON CABLE

DATE OF MANUFACTURE
HERSTELLDATUM + HT
DATE DE FABRICATION
DATA DI FABBRICAZIONE

THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO TERMICO D'APPLICAZIONE	}	I	-40 °C...+200 °C[1000h] +210 °C[1h]
		II	-40 °C...+150 °C +180 °C[1h]
		III	-40 °C...+180 °C +220 °C[1h]
		IV	-40 °C...+80 °C

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUHINWEISE SIEHE ADAPTION-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISTRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG)
SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSSTECCKER)
DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR MALE)
GRADO DI PROTEZIONE (IN COLLAGAMENTO CON SPINOTTO)

441 032 191 0

441 032 100 0

IP 68, IP 69 K
ISO 20653

WABCO-NR.	L (mm)	MASS (kg)
441 032 808 0	400	0.052
441 032 809 0	1000	0.067

MATERIAL WERKSTOFF	
SENSOR BODY SENSORGEGÄSSE	STAINLESS STEEL
SENSOR HEAD SENSORKOPF	POLYAMIDE
SENSOR CABLE SENSORKABEL	2x0.5mm ² (Cu), CROSS LINKED POLYMER JACKET
CONNECTOR SOCKET KUPPLUNGSDOSE	POLYURETHAN
CONTACT KONTAKT	Ø2.5 CuSn / Ag

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO


MAX.50N $\vartheta=20^{\circ}\text{C}$

BEND RADIUS CABLE
BIEGERADIUS KABEL
RAYON DE COURBURE DE CABLE
RAGGIO DI CURVATURA DEL CAVO

→ R 15 MIN, $\angle 90^\circ$

* ABRASION RESISTANT PRINT
ABRIEFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

RAL 9001

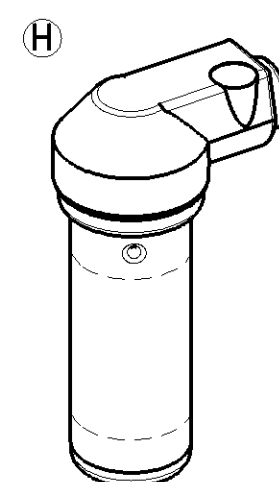

General Specification: JED-334-1, Size ISO 14405 LP						Copyright WABCO®			WABCO INDUCTIVE SENSOR WITH SOCKET STABSSENSOR MIT KUPPLUNGSDOSE CAPTEUR AVEC CONNECTEUR FEMELLE SENSORE INDUTTIVO CON CONNETTORE						
Further Technical Data: 441 032 191 0						Date		Signature							
Doc. Code: 035		Sheet: 1 To 4				Drawn									
General Tolerances JED-261						2019-04-09		Koojugodu							
Class 1)		Range of Nominal Dimensions (± mm)				Checked									
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	2019-04-10		Nieber							
						Expert									
						Hoefler									
Fine		0.5	1.0	1.5	2.0	/ kg	Scale 1:1 (2:1)	Material No. 441 032 810 0			Date of first issue:				
Medium		1.0	2.0	3.0	4.0						Doc.Code	Language	Sheet		
Coarse		X 2.0	3.5	5.0	6.5										
Tapped Holes acc.						A 2		CREO		ECN-No.		Revision	Techn. Resp.	Replacement for	
1) Tolerance Class Applied Crossmarked										500477		6x H	6310 EM	441 032 810 0/96-02-16	