


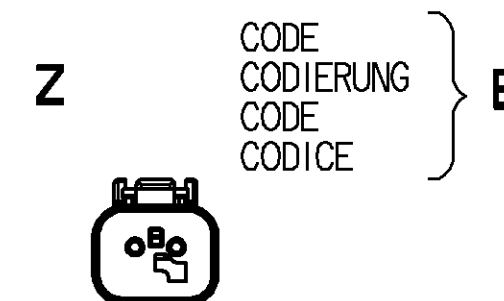

THERMORAD
2x0.96mm²

MAX.50N $t_f=20^{\circ}\text{C}$

R 15 MIN, $\angle 90^\circ$

RAL 9001

IP 68
EN 60529/IEC 529

Y
2:1

/
 PART NO
 TEILE NR. *
 NO. DE PIECE
 CODICE

WABCO 441 032 873 0

-40 °C...+150 °C
+180 °C [1h]


-40 °C...+180 °C
+220 °C [1h]

-40 °C...+120 °C

-40 °C...+125 °C

441 032 871 0

441 032 100 0

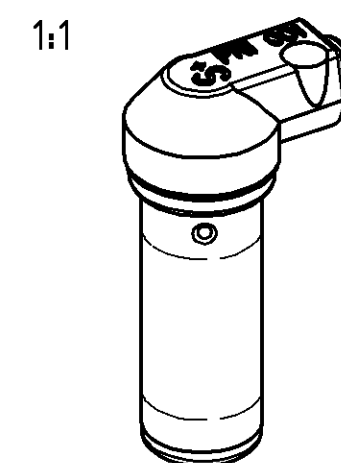

GENERAL SPECIFICATION:					JED-334.0									Pro/ENGINEER DRAWING COPYRIGHT		WABCO						
FURTHER TECHNICAL DATA:											DATE		SIGNATURE									
DOC. CODE:			SHEET:			TO							DRAWN									
GENERAL TOLERANCES											99-02-04		HARNISCHM.									
		RANGE OF NOMINAL DIMENSIONS (± mm)											CHECKED		INDUCTIVE SENSOR WITH PLUG STABSSENSOR MIT STECKER CAPTEUR AVEC FICHE SENSORE INDUTTIVO CON SPINA							
CLASS		1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400					99-02-04		HOEFLE								
												EXPERT CODE										
												7 6 0										
FINE				0.5	1.0	1.5	2.0					MASS		SCALE		PRODUCT IDENTIFICATION NO.						
MEDIUM				1.0	2.0	3.0	4.0					0.110 KG		1:1 2:1		441 032 873 0						
COARSE		X		2.0	3.5	5.0	6.5					SIZE		TRI								
TAPPED HOLES ACC. ISO 4039 / JED-152					085401		2x A		02-11-08						FUNCTION CODE		SHAPE CODE		PRODUCT TYPE		REPLACEMENT FOR	
1) TOLERANCE CLASS. APPROVED CROSSMARKED					DCN-NO.		REV.		DATE		A 2				141						0 1	